


PLAN
(BEAM NOT SHOWN)

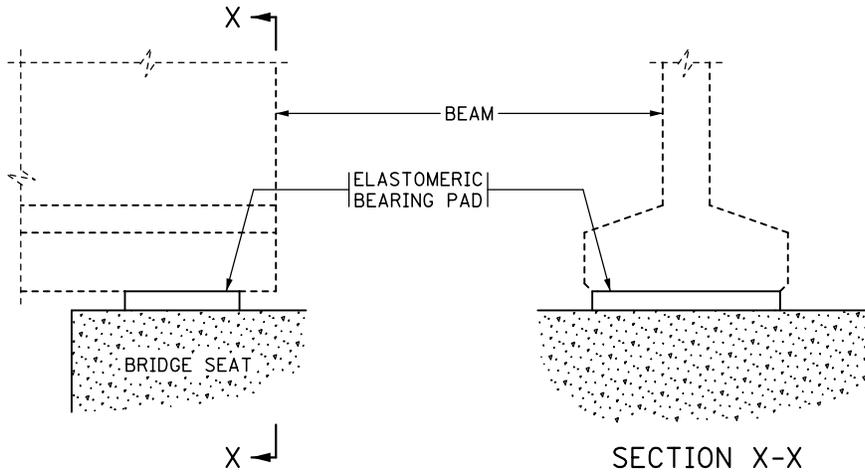

SIDE ELEVATION

SECTION X-X

TABLE						
PAD TYPE	LOCATION	BEAM SIZE	BEARING PAD SIZE			SHAPE FACTOR
			A	B	D ①	
			12	24	1/2	8.0

NOTES:

ELASTOMERIC MATERIALS AND PAD CONSTRUCTION SHALL COMPLY WITH SPEC. 3741.

PAYMENT FOR ELASTOMERIC BEARING PAD INCLUDED IN ITEM "ELASTOMERIC BEARING PAD" PER EACH.

① "D" INDICATES THE THICKNESS OF THE BEARING PAD.

DESIGNER NOTE
(REMOVE DESIGNER NOTE PRIOR TO PLOTTING FINAL PLAN):
USE 1/2" UNREINFORCED PAD WITH CONTINUITY DIAPHRAGMS OR INTEGRAL ABUTMENTS.

APPROVED: NOVEMBER 22, 2002

Daniel J. Wenzel
STATE BRIDGE ENGINEER

STATE OF MINNESOTA
DEPARTMENT OF TRANSPORTATION

ELASTOMERIC BEARING PAD
(PRESTRESSED CONCRETE BEAMS)

REVISION
12-17-2008
05-24-2012
01-13-2015

DETAIL NO.

B305