

**DISCOUNT OFF LIST
SPECIFICATION 3.0**

Vendor Name:	Ziegler Inc.
Contact Person:	Josef Murphy
Street Address:	901 W 94th St
P.O. Box:	
City, State, Zip	Minneapolis, MN 55420
Phone #:	952-888-4121
Toll Free #:	800-352-2812
Email Address:	josef.murphy@zieglercat.com

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
3.1	MANUFACTURER	JLG
3.2	DATE AND ID. OF PRICE LIST	2020 JLG Price List
3.3	CATALOG SECTION TITLE (if applicable)	R Series Scissor Lifts
3.4	PERCENTAGE DISCOUNT FROM PRICE LIST	36.0%
3.5	PRICE FOR MANUALS (One set of manuals included at no cost, per specs) PRICE FOR <u>ADDITIONAL</u> SERVICE MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> PARTS MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> OPERATIONS MANUAL	Digital \$ 50.00 Paper \$ 50.00
3.6	PRICE FOR SET OF FLUID AND AIR FILTERS (if applicable)	\$ 500.00
3.7	STANDARD WARRANTY:	1 yr full machine / 5yr structural
3.8	<u>PERFORMANCE/EXTENDED WARRANTY OPTIONS</u> List performance/warranty options. Add additional lines if necessary. (Specify years, miles or hours extended term covers.) _____	\$ \$
3.9	<u>INSTALLATION - PER HOUR</u> (Hourly Shop Rate) Installation services may be requested on an "as needed" basis. (See Special Terms and Conditions)	\$ 144.00
3.10	<u>NEW EQUIPMENT RENTAL PROGRAM</u> If rental programs are available on the new equipment offered, with the option to purchase, list the hourly/weekly/monthly rental rate. Indicate the percent of rental fee paid by the purchaser that will be applied to the purchase price. (See Solicitation Special Terms & Conditions.)	Hourly Rental Rate: \$ Weekly Rental Rate: \$ Monthly Rental Rate: \$ Percent (%) of Rental Fee applied to purchase price: %

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
	If the new rental equipment is purchased and finance charges are applicable for the actual rental term only, state the actual interest rate here: _____	
3.11	<u>VENDOR OWNED RENTAL RETURN OR DEMO EQUIPMENT PROGRAM</u> (See Special Terms and Conditions.) DEDUCT cost per Used Hour from the original Contract Price	\$ _____
3.12	<u>DELIVERY STARTING POINT -</u> (City, State, Zip) (See Special Terms and Conditions - No flat rate allowed)	Nearest Ziegler Location
	Price per loaded mile:	\$5.00
	List minimum delivery charge (if applicable):	\$250

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

Vendor Name:	Ziegler Inc.
Contact Person:	Josef Murphy
Street Address:	901 W 94th St
P.O. Box:	
City, State, Zip	Minneapolis, MN 55420
Phone #:	952-888-4121
Toll Free #:	800-352-2812
Email Address:	josef.murphy@zieglercat.com

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
3.1	MANUFACTURER	JLG
3.2	DATE AND ID. OF PRICE LIST	2020 JLG Price List
3.3	CATALOG SECTION TITLE (if applicable)	Electric Vertical Mast Lifts
3.4	PERCENTAGE DISCOUNT FROM PRICE LIST	36.0%
3.5	PRICE FOR MANUALS (One set of manuals included at no cost, per specs) PRICE FOR <u>ADDITIONAL</u> SERVICE MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> PARTS MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> OPERATIONS MANUAL	Digital \$ 50.00 Paper \$ 50.00
3.6	PRICE FOR SET OF FLUID AND AIR FILTERS (if applicable)	\$ 500.00
3.7	STANDARD WARRANTY:	1 yr full machine / 5yr structural
3.8	PERFORMANCE/EXTENDED WARRANTY OPTIONS List performance/warranty options. Add additional lines if necessary. (Specify years, miles or hours extended term covers.) _____ \$ _____ \$	
3.9	INSTALLATION - PER HOUR (Hourly Shop Rate) Installation services may be requested on an "as needed" basis. (See Special Terms and Conditions)	\$ 144.00
3.10	NEW EQUIPMENT RENTAL PROGRAM If rental programs are available on the new equipment offered, with the option to purchase, list the hourly/weekly/monthly rental rate. Indicate the percent of rental fee paid by the purchaser that will be applied to the purchase price. (See Solicitation Special Terms & Conditions.) Hourly Rental Rate: \$ Weekly Rental Rate: \$ Monthly Rental Rate: \$ Percent (%) of Rental Fee applied to purchase price: _____ %	

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
	If the new rental equipment is purchased and finance charges are applicable for the actual rental term only, state the actual interest rate here: _____	
3.11	<u>VENDOR OWNED RENTAL RETURN OR DEMO EQUIPMENT PROGRAM</u> (See Special Terms and Conditions.) DEDUCT cost per Used Hour from the original Contract Price	\$ _____
3.12	<u>DELIVERY STARTING POINT -</u> (City, State, Zip) (See Special Terms and Conditions - No flat rate allowed)	Nearest Ziegler Location
	Price per loaded mile:	\$5.00
	List minimum delivery charge (if applicable):	\$250

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

Vendor Name:	Ziegler Inc.
Contact Person:	Josef Murphy
Street Address:	901 W 94th St
P.O. Box:	
City, State, Zip	Minneapolis, MN 55420
Phone #:	952-888-4121
Toll Free #:	800-352-2812
Email Address:	josef.murphy@zieglercat.com

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
3.1	MANUFACTURER	JLG
3.2	DATE AND ID. OF PRICE LIST	2020 JLG Price List
3.3	CATALOG SECTION TITLE (if applicable)	MSP Series
3.4	PERCENTAGE DISCOUNT FROM PRICE LIST	15.0%
3.5	PRICE FOR MANUALS (One set of manuals included at no cost, per specs) PRICE FOR <u>ADDITIONAL</u> SERVICE MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> PARTS MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> OPERATIONS MANUAL	Digital \$ 50.00 Paper \$ 50.00
3.6	PRICE FOR SET OF FLUID AND AIR FILTERS (if applicable)	\$ 500.00
3.7	STANDARD WARRANTY:	1 yr full machine / 5yr structural
3.8	PERFORMANCE/EXTENDED WARRANTY OPTIONS List performance/warranty options. Add additional lines if necessary. (Specify years, miles or hours extended term covers.) _____ \$ _____ \$	
3.9	INSTALLATION - PER HOUR (Hourly Shop Rate) Installation services may be requested on an "as needed" basis. (See Special Terms and Conditions)	\$ 144.00
3.10	NEW EQUIPMENT RENTAL PROGRAM If rental programs are available on the new equipment offered, with the option to purchase, list the hourly/weekly/monthly rental rate. Indicate the percent of rental fee paid by the purchaser that will be applied to the purchase price. (See Solicitation Special Terms & Conditions.) Hourly Rental Rate: \$ Weekly Rental Rate: \$ Monthly Rental Rate: \$ Percent (%) of Rental Fee applied to purchase price: _____ %	

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
	If the new rental equipment is purchased and finance charges are applicable for the actual rental term only, state the actual interest rate here: _____	
3.11	<u>VENDOR OWNED RENTAL RETURN OR DEMO EQUIPMENT PROGRAM</u> (See Special Terms and Conditions.) DEDUCT cost per Used Hour from the original Contract Price	\$ _____
3.12	<u>DELIVERY STARTING POINT -</u> (City, State, Zip) (See Special Terms and Conditions - No flat rate allowed)	Nearest Ziegler Location
	Price per loaded mile:	\$5.00
	List minimum delivery charge (if applicable):	\$250

**DISCOUNT OFF LIST
SPECIFICATION 3.0**

Vendor Name:	Ziegler Inc.
Contact Person:	Josef Murphy
Street Address:	901 W 94th St
P.O. Box:	
City, State, Zip	Minneapolis, MN 55420
Phone #:	952-888-4121
Toll Free #:	800-352-2812
Email Address:	josef.murphy@zieglercat.com

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
3.1	MANUFACTURER	JLG
3.2	DATE AND ID. OF PRICE LIST	2020 JLG Price List
3.3	CATALOG SECTION TITLE (if applicable)	Toucan series
3.4	PERCENTAGE DISCOUNT FROM PRICE LIST	36.0%
3.5	PRICE FOR MANUALS (One set of manuals included at no cost, per specs) PRICE FOR <u>ADDITIONAL</u> SERVICE MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> PARTS MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> OPERATIONS MANUAL	Digital \$ 50.00 Paper \$ 50.00
3.6	PRICE FOR SET OF FLUID AND AIR FILTERS (if applicable)	\$ 500.00
3.7	STANDARD WARRANTY:	1 yr full machine / 5yr structural
3.8	<u>PERFORMANCE/EXTENDED WARRANTY OPTIONS</u> List performance/warranty options. Add additional lines if necessary. (Specify years, miles or hours extended term covers.)	\$ \$
3.9	<u>INSTALLATION - PER HOUR</u> (Hourly Shop Rate) Installation services may be requested on an "as needed" basis. (See Special Terms and Conditions)	\$ 144.00
3.10	<u>NEW EQUIPMENT RENTAL PROGRAM</u> If rental programs are available on the new equipment offered, with the option to purchase, list the hourly/weekly/monthly rental rate. Indicate the percent of rental fee paid by the purchaser that will be applied to the purchase price. (See Solicitation Special Terms & Conditions.)	Hourly Rental Rate: \$ Weekly Rental Rate: \$ Monthly Rental Rate: \$ Percent (%) of Rental Fee applied to purchase price: %

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
	If the new rental equipment is purchased and finance charges are applicable for the actual rental term only, state the actual interest rate here: _____	
3.11	<u>VENDOR OWNED RENTAL RETURN OR DEMO EQUIPMENT PROGRAM</u> (See Special Terms and Conditions.) DEDUCT cost per Used Hour from the original Contract Price	\$ _____
3.12	<u>DELIVERY STARTING POINT -</u> (City, State, Zip) (See Special Terms and Conditions - No flat rate allowed)	<u>Nearest Ziegler Location</u>
	Price per loaded mile:	\$5.00
	List minimum delivery charge (if applicable):	\$250

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

Vendor Name:	Ziegler Inc.
Contact Person:	Josef Murphy
Street Address:	901 W 94th St
P.O. Box:	
City, State, Zip	Minneapolis, MN 55420
Phone #:	952-888-4121
Toll Free #:	800-352-2812
Email Address:	josef.murphy@zieglercat.com

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
3.1	MANUFACTURER	JLG
3.2	DATE AND ID. OF PRICE LIST	2020 JLG Price List
3.3	CATALOG SECTION TITLE (if applicable)	Compact Crawler Boom
3.4	PERCENTAGE DISCOUNT FROM PRICE LIST	24.0%
3.5	PRICE FOR MANUALS (One set of manuals included at no cost, per specs) PRICE FOR <u>ADDITIONAL</u> SERVICE MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> PARTS MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> OPERATIONS MANUAL	Digital \$ 50.00 Paper \$ 50.00
3.6	PRICE FOR SET OF FLUID AND AIR FILTERS (if applicable)	\$ 500.00
3.7	STANDARD WARRANTY:	1 yr full machine / 5yr structural
3.8	PERFORMANCE/EXTENDED WARRANTY OPTIONS List performance/warranty options. Add additional lines if necessary. (Specify years, miles or hours extended term covers.) _____ \$ _____ \$	
3.9	INSTALLATION - PER HOUR (Hourly Shop Rate) Installation services may be requested on an "as needed" basis. (See Special Terms and Conditions)	\$ 144.00
3.10	NEW EQUIPMENT RENTAL PROGRAM If rental programs are available on the new equipment offered, with the option to purchase, list the hourly/weekly/monthly rental rate. Indicate the percent of rental fee paid by the purchaser that will be applied to the purchase price. (See Solicitation Special Terms & Conditions.) Hourly Rental Rate: \$ Weekly Rental Rate: \$ Monthly Rental Rate: \$ Percent (%) of Rental Fee applied to purchase price: _____ %	

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
	If the new rental equipment is purchased and finance charges are applicable for the actual rental term only, state the actual interest rate here: _____	
3.11	<u>VENDOR OWNED RENTAL RETURN OR DEMO EQUIPMENT PROGRAM</u> (See Special Terms and Conditions.) DEDUCT cost per Used Hour from the original Contract Price	\$ _____
3.12	<u>DELIVERY STARTING POINT -</u> (City, State, Zip) (See Special Terms and Conditions - No flat rate allowed)	Nearest Ziegler Location
	Price per loaded mile:	\$5.00
	List minimum delivery charge (if applicable):	\$250

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

Vendor Name:	Ziegler Inc.
Contact Person:	Josef Murphy
Street Address:	901 W 94th St
P.O. Box:	
City, State, Zip	Minneapolis, MN 55420
Phone #:	952-888-4121
Toll Free #:	800-352-2812
Email Address:	josef.murphy@zieglercat.com

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
3.1	MANUFACTURER	JLG
3.2	DATE AND ID. OF PRICE LIST	2020 JLG Price List
3.3	CATALOG SECTION TITLE (if applicable)	Electric Booms
3.4	PERCENTAGE DISCOUNT FROM PRICE LIST	38.0%
3.5	PRICE FOR MANUALS (One set of manuals included at no cost, per specs) PRICE FOR <u>ADDITIONAL</u> SERVICE MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> PARTS MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> OPERATIONS MANUAL	Digital \$ 50.00 Paper \$ 50.00
3.6	PRICE FOR SET OF FLUID AND AIR FILTERS (if applicable)	\$ 500.00
3.7	STANDARD WARRANTY:	1 yr full machine / 5yr structural
3.8	PERFORMANCE/EXTENDED WARRANTY OPTIONS List performance/warranty options. Add additional lines if necessary. (Specify years, miles or hours extended term covers.) _____ \$ _____ \$	
3.9	INSTALLATION - PER HOUR (Hourly Shop Rate) Installation services may be requested on an "as needed" basis. (See Special Terms and Conditions)	\$ 144.00
3.10	NEW EQUIPMENT RENTAL PROGRAM If rental programs are available on the new equipment offered, with the option to purchase, list the hourly/weekly/monthly rental rate. Indicate the percent of rental fee paid by the purchaser that will be applied to the purchase price. (See Solicitation Special Terms & Conditions.) Hourly Rental Rate: \$ Weekly Rental Rate: \$ Monthly Rental Rate: \$ Percent (%) of Rental Fee applied to purchase price: _____ %	

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
	If the new rental equipment is purchased and finance charges are applicable for the actual rental term only, state the actual interest rate here: _____	
3.11	<u>VENDOR OWNED RENTAL RETURN OR DEMO EQUIPMENT PROGRAM</u> (See Special Terms and Conditions.) DEDUCT cost per Used Hour from the original Contract Price	\$ _____
3.12	<u>DELIVERY STARTING POINT -</u> (City, State, Zip) (See Special Terms and Conditions - No flat rate allowed)	Nearest Ziegler Location
	Price per loaded mile:	\$5.00
	List minimum delivery charge (if applicable):	\$250

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

Vendor Name:	Ziegler Inc.
Contact Person:	Josef Murphy
Street Address:	901 W 94th St
P.O. Box:	
City, State, Zip	Minneapolis, MN 55420
Phone #:	952-888-4121
Toll Free #:	800-352-2812
Email Address:	josef.murphy@zieglercat.com

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
3.1	MANUFACTURER	JLG
3.2	DATE AND ID. OF PRICE LIST	2020 JLG Price List
3.3	CATALOG SECTION TITLE (if applicable)	Articulating Booms
3.4	PERCENTAGE DISCOUNT FROM PRICE LIST	39.0%
3.5	PRICE FOR MANUALS (One set of manuals included at no cost, per specs) PRICE FOR <u>ADDITIONAL</u> SERVICE MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> PARTS MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> OPERATIONS MANUAL	Digital \$ 50.00 Paper \$ 50.00
3.6	PRICE FOR SET OF FLUID AND AIR FILTERS (if applicable)	\$ 500.00
3.7	STANDARD WARRANTY:	1 yr full machine / 5yr structural
3.8	PERFORMANCE/EXTENDED WARRANTY OPTIONS List performance/warranty options. Add additional lines if necessary. (Specify years, miles or hours extended term covers.) _____ \$ _____ \$	
3.9	INSTALLATION - PER HOUR (Hourly Shop Rate) Installation services may be requested on an "as needed" basis. (See Special Terms and Conditions)	\$ 144.00
3.10	NEW EQUIPMENT RENTAL PROGRAM If rental programs are available on the new equipment offered, with the option to purchase, list the hourly/weekly/monthly rental rate. Indicate the percent of rental fee paid by the purchaser that will be applied to the purchase price. (See Solicitation Special Terms & Conditions.) Hourly Rental Rate: \$ Weekly Rental Rate: \$ Monthly Rental Rate: \$ Percent (%) of Rental Fee applied to purchase price: _____ %	

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
	If the new rental equipment is purchased and finance charges are applicable for the actual rental term only, state the actual interest rate here: _____	
3.11	<u>VENDOR OWNED RENTAL RETURN OR DEMO EQUIPMENT PROGRAM</u> (See Special Terms and Conditions.) DEDUCT cost per Used Hour from the original Contract Price	\$ _____
3.12	<u>DELIVERY STARTING POINT -</u> (City, State, Zip) (See Special Terms and Conditions - No flat rate allowed)	Nearest Ziegler Location
	Price per loaded mile:	\$5.00
	List minimum delivery charge (if applicable):	\$250

**DISCOUNT OFF LIST
SPECIFICATION 3.0**

Vendor Name:	Ziegler Inc.
Contact Person:	Josef Murphy
Street Address:	901 W 94th St
P.O. Box:	
City, State, Zip	Minneapolis, MN 55420
Phone #:	952-888-4121
Toll Free #:	800-352-2812
Email Address:	josef.murphy@zieglercat.com

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
3.1	MANUFACTURER	JLG
3.2	DATE AND ID. OF PRICE LIST	2020 JLG Price List
3.3	CATALOG SECTION TITLE (if applicable)	Telescopic Booms
3.4	PERCENTAGE DISCOUNT FROM PRICE LIST	39.0%
3.5	PRICE FOR MANUALS (One set of manuals included at no cost, per specs) PRICE FOR <u>ADDITIONAL</u> SERVICE MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> PARTS MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> OPERATIONS MANUAL	Digital \$ 50.00 Paper \$ 50.00
3.6	PRICE FOR SET OF FLUID AND AIR FILTERS (if applicable)	\$ 500.00
3.7	STANDARD WARRANTY:	1 yr full machine / 5yr structural
3.8	<u>PERFORMANCE/EXTENDED WARRANTY OPTIONS</u> List performance/warranty options. Add additional lines if necessary. (Specify years, miles or hours extended term covers.) _____	\$ \$
3.9	<u>INSTALLATION - PER HOUR</u> (Hourly Shop Rate) Installation services may be requested on an "as needed" basis. (See Special Terms and Conditions)	\$ 144.00
3.10	<u>NEW EQUIPMENT RENTAL PROGRAM</u> If rental programs are available on the new equipment offered, with the option to purchase, list the hourly/weekly/monthly rental rate. Indicate the percent of rental fee paid by the purchaser that will be applied to the purchase price. (See Solicitation Special Terms & Conditions.)	Hourly Rental Rate: \$ Weekly Rental Rate: \$ Monthly Rental Rate: \$ Percent (%) of Rental Fee applied to purchase price: %

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
	If the new rental equipment is purchased and finance charges are applicable for the actual rental term only, state the actual interest rate here: _____	
3.11	<u>VENDOR OWNED RENTAL RETURN OR DEMO EQUIPMENT PROGRAM</u> (See Special Terms and Conditions.) DEDUCT cost per Used Hour from the original Contract Price	\$ _____
3.12	<u>DELIVERY STARTING POINT -</u> (City, State, Zip) (See Special Terms and Conditions - No flat rate allowed)	<u>Nearest Ziegler Location</u>
	Price per loaded mile:	\$5.00
	List minimum delivery charge (if applicable):	\$250

DISCOUNT OFF LIST
SPECIFICATION 3.0

Vendor Name:	Ziegler Inc.
Contact Person:	Josef Murphy
Street Address:	901 W 94th St
P.O. Box:	
City, State, Zip	Minneapolis, MN 55420
Phone #:	952-888-4121
Toll Free #:	800-352-2812
Email Address:	joef.murphy@zieglercat.com

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
3.1	MANUFACTURER	JLG
3.2	DATE AND ID. OF PRICE LIST	2020 JLG Price List
3.3	CATALOG SECTION TITLE (if applicable)	Tele. Boom Lifts - 400SC/460SC/1850SJ
3.4	PERCENTAGE DISCOUNT FROM PRICE LIST	33.0%
3.5	PRICE FOR MANUALS (One set of manuals included at no cost, per specs) PRICE FOR <u>ADDITIONAL</u> SERVICE MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> PARTS MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> OPERATIONS MANUAL	Digital \$ 50.00 Paper \$ 50.00
3.6	PRICE FOR SET OF FLUID AND AIR FILTERS (if applicable)	\$ 500.00
3.7	STANDARD WARRANTY:	1 yr full machine / 5yr structural
3.8	<u>PERFORMANCE/EXTENDED WARRANTY OPTIONS</u> List performance/warranty options. Add additional lines if necessary. (Specify years, miles or hours extended term covers.) _____ _____	\$ _____ \$ _____
3.9	<u>INSTALLATION - PER HOUR</u> (Hourly Shop Rate) Installation services may be requested on an "as needed" basis. (See Special Terms and Conditions)	\$ 144.00
3.10	<u>NEW EQUIPMENT RENTAL PROGRAM</u> If rental programs are available on the new equipment offered, with the option to purchase, list the hourly/weekly/monthly rental rate. Indicate the percent of rental fee paid by the purchaser that will be applied to the purchase price. (See Solicitation Special Terms & Conditions.) Hourly Rental Rate: \$ _____ Weekly Rental Rate: \$ _____ Monthly Rental Rate: \$ _____ Percent (%) of Rental Fee applied to purchase price: _____ %	

If the new rental equipment is purchased and finance charges are applicable for the actual rental term only, state the actual interest rate here: _____

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
3.11	VENDOR OWNED RENTAL RETURN OR DEMO EQUIPMENT PROGRAM (See Special Terms and Conditions.) DEDUCT cost per Used Hour from the original Contract Price	\$ _____
3.12	DELIVERY STARTING POINT - (City, State, Zip) (See Special Terms and Conditions - No flat rate allowed)	Nearest Ziegler Location Price per loaded mile: \$5.00 List minimum delivery charge (if applicable): \$250

**DISCOUNT OFF LIST
SPECIFICATION 3.0**

Vendor Name:	Ziegler Inc.
Contact Person:	Josef Murphy
Street Address:	901 W 94th St
P.O. Box:	
City, State, Zip	Minneapolis, MN 55420
Phone #:	952-888-4121
Toll Free #:	800-352-2812
Email Address:	josef.murphy@zieglercat.com

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
3.1	MANUFACTURER	JLG
3.2	DATE AND ID. OF PRICE LIST	2020 JLG Price List
3.3	CATALOG SECTION TITLE (if applicable)	Towable Boom Lifts
3.4	PERCENTAGE DISCOUNT FROM PRICE LIST	33.0%
3.5	PRICE FOR MANUALS (One set of manuals included at no cost, per specs) PRICE FOR <u>ADDITIONAL</u> SERVICE MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> PARTS MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> OPERATIONS MANUAL	Digital \$ 50.00 Paper \$ 50.00
3.6	PRICE FOR SET OF FLUID AND AIR FILTERS (if applicable)	\$ 500.00
3.7	STANDARD WARRANTY:	1 yr full machine / 5yr structural
3.8	PERFORMANCE/EXTENDED WARRANTY OPTIONS List performance/warranty options. Add additional lines if necessary. (Specify years, miles or hours extended term covers.) _____ \$ _____ \$	
3.9	INSTALLATION - PER HOUR (Hourly Shop Rate) Installation services may be requested on an "as needed" basis. (See Special Terms and Conditions)	\$ 144.00
3.10	NEW EQUIPMENT RENTAL PROGRAM If rental programs are available on the new equipment offered, with the option to purchase, list the hourly/weekly/monthly rental rate. Indicate the percent of rental fee paid by the purchaser that will be applied to the purchase price. (See Solicitation Special Terms & Conditions.) Hourly Rental Rate: \$ Weekly Rental Rate: \$ Monthly Rental Rate: \$ Percent (%) of Rental Fee applied to purchase price: %	

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
	If the new rental equipment is purchased and finance charges are applicable for the actual rental term only, state the actual interest rate here: _____	
3.11	<u>VENDOR OWNED RENTAL RETURN OR DEMO EQUIPMENT PROGRAM</u> (See Special Terms and Conditions.) DEDUCT cost per Used Hour from the original Contract Price	\$ _____
3.12	<u>DELIVERY STARTING POINT -</u> (City, State, Zip) (See Special Terms and Conditions - No flat rate allowed)	Nearest Ziegler Location
	Price per loaded mile:	\$5.00
	List minimum delivery charge (if applicable):	\$250

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

Vendor Name:	Ziegler Inc.
Contact Person:	Josef Murphy
Street Address:	901 W 94th St
P.O. Box:	
City, State, Zip	Minneapolis, MN 55420
Phone #:	952-888-4121
Toll Free #:	800-352-2812
Email Address:	josef.murphy@zieglercat.com

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
3.1	MANUFACTURER	Skyjack
3.2	DATE AND ID. OF PRICE LIST	2020 Skyjack Price List
3.3	CATALOG SECTION TITLE (if applicable)	Skyjack
3.4	PERCENTAGE DISCOUNT FROM PRICE LIST	39.0%
3.5	PRICE FOR MANUALS (One set of manuals included at no cost, per specs) PRICE FOR <u>ADDITIONAL</u> SERVICE MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> PARTS MANUAL	Digital \$ 75.00 Paper \$ 75.00
	PRICE FOR <u>ADDITIONAL</u> OPERATIONS MANUAL	Digital \$ 50.00 Paper \$ 50.00
3.6	PRICE FOR SET OF FLUID AND AIR FILTERS (if applicable)	\$ 500.00
3.7	STANDARD WARRANTY:	2 year full machine / 5 year structural
3.8	<u>PERFORMANCE/EXTENDED WARRANTY OPTIONS</u> List performance/warranty options. Add additional lines if necessary. (Specify years, miles or hours extended term covers.) _____ \$ _____ _____ \$ _____	
3.9	<u>INSTALLATION - PER HOUR</u> (Hourly Shop Rate) Installation services may be requested on an "as needed" basis. (See Special Terms and Conditions)	\$ 144.00
3.10	<u>NEW EQUIPMENT RENTAL PROGRAM</u> If rental programs are available on the new equipment offered, with the option to purchase, list the hourly/weekly/monthly rental rate. Indicate the percent of rental fee paid by the purchaser that will be applied to the purchase price. (See Solicitation Special Terms & Conditions.) Hourly Rental Rate: \$ _____ Weekly Rental Rate: \$ _____ Monthly Rental Rate: \$ _____ Percent (%) of Rental Fee applied to purchase price: _____ %	

If the new rental equipment is purchased and finance charges are applicable for the actual rental term only, state the actual interest rate here: _____

**EXHIBIT D: LIFTS; SELF-PROPELLED, MATERIAL HANDLING, ETC.
DISCOUNT OFF LIST
SPECIFICATION 3.0**

SPEC. NUMBER	INFORMATION REQUESTED	ANSWER
3.11	<u>VENDOR OWNED RENTAL RETURN OR DEMO EQUIPMENT PROGRAM</u>	
	(See Special Terms and Conditions.)	
	DEDUCT cost per Used Hour from the original Contract Price	\$
3.12	<u>DELIVERY STARTING POINT -</u>	<u>Nearest Ziegler Location</u>
	(See Special Terms and Conditions - No flat rate allowed)	
	Price per loaded mile:	\$5.00
	List minimum delivery charge (if applicable):	\$250

MOBILE ELEVATING PLATFORMS, STOCK PICKERS, TRAILERS & TELEHANDLERS SALES MANUAL

North America — Effective January 1, 2020



JLG®



Mobile Elevating Work Platforms, Stock Pickers, Trailers & Telehandlers

Model	Machine Specs	Price List
Scissor Lifts		
R Series (R1932i/R1932/R2632/R3246/R4045)	3	64
Lightweight ES Series (ES1330L/ES1530L)	4	65
ES Series (ES1932i/ES1932/2632ES/2646ES/3246ES)	5	66
AE Series (AE1932)	6	67
ERT Series (ERT2669/ERT3369/ERT4069/ERT4769)	7	68
RT Series (RT2669/RT3369/RT4069/RT4769)	8	69
LRT Series (330LRT/430LRT/530LRT)	9	70
Vertical Mast Lifts		
1230ES	10	71
AM Series (25AM/30AM/38AM)	11	72
20MVL	12	73
Low-Level Access		
EcoLifts™ Series Non-Powered Vertical Lifts (50/70)	13	74
Push-Around Mast Lifts (830P/1030P)	14	75
LiftPod® (FT70/FT140)	15	76
Stock Pickers		
MSP Series (10MSP/20MSP)	16	77-78
Mast-Style Boom Lifts		
Toucan® Series (20E/26E/32E)	17-18	79
Compact Crawler Boom Lifts		
Compact Crawler Series (X430AJ/X500AJ/X600AJ/X770AJ/X1000AJ)	19-20	80
Electric & Hybrid Boom Lifts		
E300AJP	21-22	81
E400AN/AJPN	23-24	82
E450AJ	25-26	83
EC/H600SJ & EC/H600SJP	27-28	84
H340AJ	29-30	85
H800AJ	31-32	86
Articulating Boom Lifts		
340AJ & 450 Series (450A/450AJ)	33-34	87-88
600 Series (600AJ)	35-36	89
800AJ	37-38	90
Ultra Series (1250AJP/1500AJP)	39-40	91

Model	Machine Specs	Price List
Telescopic Boom Lifts		
400 Series (400S/460SJ & 400S HC3/460SJ HC3)	41-42	92
400 Crawler Series (400SC/460SJC)	43-44	93
600 Series (600S/660SJ & 600S HC3/660SJ HC3)	45-46	94
660SJC	47-48	95
800 Series (800S/860SJ & 800S HC3/860SJ HC3)	49-50	96
Ultra Series (1200SJP/1350SJP/1500SJ/1850SJ)	51-52	97

Towable Boom Lifts

Tow-Pro® Series (T350/T500J)	53-54	98
--	-----------------	----

TRIPLE-L® Trailers	55	99-100
-------------------------------------	--------------	--------

Cold Weather Package Options	56
---	----

WorkStation in the Sky®	57-59
--	-------

ES Scissor Workstation in the Sky Accessories	60
--	----

Highlighted Accessories and Options	61
--	----

Telehandlers and Attachments

JLG®

JLG® G5-18A	105-106	121-122
JLG® 742/943/1043	107-108	123-128
JLG® 1055/1075/1255	109-110	129-134
JLG® 1644/1732	111-112	135-138

SkyTrak®

SkyTrak® 3013	113-114	139-140
SkyTrak® 6036/6042/ 8042	115-116	141-146
SkyTrak® 10042/10054/12054	117-118	147-152

Attachments	119
------------------------------	-----

Machine Shipments:

- Please note that all published prices are List Prices, Freight on Board (F.O.B) factory.
- Machine loading hours are E.S.T., Monday through Friday, except holidays.
- In order to expedite shipment of your units, please coordinate shipping instructions in advance of the projected available ship date (a minimum of 24 hours is requested).

The JLG "1 & 5" Warranty

We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information. All prices are in U.S. dollars.

Note: Due to continuous product improvements we reserve the right to make specification and/or equipment changes without prior notification. 03/31/20

Mobile Elevating Work Platforms, Stock Pickers & Trailers

R Series

R1932i/R1932/R2632/R3246/R4045 Scissor Lift

	R1932i	R1932	R2632	R3246	R4045
Platform Height (indoor)	19' (5.79 m)	19' (5.79 m)	25.5' (7.77 m)	32' (9.75 m)	39' 3" (11.97 m)
Platform Height (outdoor)	n/a	19' (5.79 m)	21' (6.4 m)	32' (9.75 m)	29' (8.8 m)
Platform Height — Lowered	38.6" (.981 m)	38.6" (.981 m)	43.6" (1.11 m)	50.9" (1.29 m)	55" (1.4 m)
No. Occupants - Indoor	1	2	2	2	3
No. Occupants - Outdoor	0	1	1	1	1
Platform Railing Height	43.3" (1.10 m)	43.3" (1.10 m)	44.6" (1.13 m)	44.6" (1.13 m)	44" (1.132 m)
Overall Height	82.8" (2.10 m)	82.8" (2.10 m)	88.2" (2.24 m)	96.3" (2.45 m)	100" (2.53 m)
— With Rails Folded	64.3 (1.63m)	64.3 (1.63m)	70.3" (7.79 m)	77.6" (1.97 m)	75" (1.9 m)
Platform Dimensions	62.7 x 25.4" (1.59 x .64 m)	62.7 x 25.4" (1.59 x .64 m)	84 x 25.4" (2.13 x .65 m)	84 x 41.6" (2.13 x 1.06 m)	96 x 41" (2.43 x 1.05 m)
— Platform Extension	36" (91 cm)	36" (91 cm)	34" (86.5 cm)	36" (91 cm)	36" (91 cm)
Overall Machine Length	68.7' (1.74 m)	68.7' (1.74 m)	94.3" (2.40 m)	94.3" (2.40 m)	106" (2.71 m)
Overall Machine Width	32" (81 cm)	32" (81 cm)	32" (81 cm)	46" (117 cm)	45" (114.3 cm)
Wheelbase	53" (1.34 m)	53" (1.34 m)	74" (1.88 m)	74" (1.88 m)	80" (2.03 m)
Ground Clearance	2.8" (7 cm)	2.8" (7 cm)	3.9" (9.8 cm)	3.9" (9.8 cm)	5" (12.7 cm)
Platform Capacity (indoor)	507 lb (230 kg)	507 lb (230 kg)	507 lb (230 kg)	705 lb (320 kg)	770 lb (350 kg)
Platform Capacity (outdoor)	n/a	507 lb (230 kg)	275 lb (125 kg)	507 lb (230 kg)	550 lb (250 kg)
— Capacity on Deck Extension	265 lb (120 kg)	265 lb (120 kg)	265 lb (120 kg)	265 lb (120 kg)	250 lb (113 kg)
Lift/Lower Time	22/24 seconds	22/24 seconds	32/24 seconds	46/33 seconds	70/35 seconds
Maximum Drive Height (indoor)	Full Height	Full Height	Full Height	Full Height	Full Height
Maximum Drive Height (outdoor)	n/a	Full Height	21' (6.4m)	Full Height	29' (8.8 m)
Weight *	2,675 lb (1,213 kg)	3,353 lb (1,521 kg)	4,280 lb (1,941 kg)	5,410 lb (2,454 kg)	7,000 lb (3,175 kg)
Ground Bearing Pressure	103 psi (7.2 kg/cm2)	114 psi (8.0 kg/cm2)	92 psi (6.5 kg/cm2)	131 psi (9.21 kg/cm2)	135 psi (9.49 kg/cm2)
Drive Speed—Lowered	2.1 mph (3.4 km/h)	2.1 mph (3.4 km/h)	2.2 mph (3.5 km/h)	2.5 mph (4 km/h)	2.1 mph (3.4 km/h)
Drive Speed—Elevated	0.5 mph (0.8 km/h)	0.5 mph (0.8 km/h)	0.5 mph (0.8 km/h)	0.5 mph (0.8 km/h)	0.5 mph (0.8 km/h)
Max Tilt Rating					
— Indoor (side to side)	2.75°	1.75 °	1.50°	2.50°	1.50°
— Outdoor (side to side)	n/a	1.50 °	1.50 °	1.50 °	1.50 °
Fore and Aft	2.75 °	3.75 °	3.50 °	3.50 °	3.50 °
Gradeability	25%	25%	25%	25%	25%
Turning Radius (inside)	Zero	Zero	Zero	Zero	Zero
Turning Radius (outside)	66" (1.68 m)	66" (1.68 m)	88.2" (2.24 m)	88" (2.24 m)	100" (2.54 m)
Tire Size (non-marking solid)	12.7" x 4" (323 x 100mm)	12.7" x 4" (323 x 100mm)	16 x 5" (406 x 127 mm)	16 x 5" (406 x 127 mm)	16 x 5" (406 x 127 mm)
Batteries	4 x 6V 220 amp-hr	4 x 6V 220 amp-hr	4 x 6V 220 amp-hr	4 x 6V 220 amp-hr	4 x 12V, 150 amp-hr
Charger	27 amp	27 amp	27 amp	27 amp	27 amp
Pump	Fixed Displacement Gear	Fixed Displacement Gear	Fixed Displacement Gear	Fixed Displacement Gear	Fixed Displacement Gear
Hydraulic Reservoir	4 gal (15 L)	4 gal (15 L)	4 gal (15 L)	4 gal (15 L)	7.9 gal. (30 L)
Brakes (on drive wheels)	Multi-Disc Friction	Multi-Disc Friction	Multi-Disc Friction	Multi-Disc Friction	Multi-Disc Friction
Rail Type	Fold-Down	Fold-Down	Fold-Down	Fold-Down	Fold-Down
Drive	Hydraulic Front Wheel	Hydraulic Front Wheel	Hydraulic Front Wheel	Hydraulic Front Wheel	Hydraulic Front Wheel

*Certain weights and dimensions may vary due to options and to compliance with country standards.

Complies with ANSI 92.20 regulations.

Specifications may change to meet country standards or with addition of optional equipment.

Lightweight ES Series

ES1330L/ES1530L Scissor Lift

**NOW RATED
FOR INDOOR &
OUTDOOR USE**

	ES1330L	ES1530L
Platform Height—Elevated (Indoor)	13' (3.8 m)	15' (4.5 m)
Platform Height - Elevated (Outdoor)	13' (3.8 m)	10' (3 m)
Platform Height—Lowered	28.0" (7 m)	31.1" (.8 m)
Platform Capacity	500 lb (227 kg)	500 lb (227 kg)
—Capacity on Deck Extension	250 lb (115 kg)	250 lb (115 kg)
No. Occupants - Indoor	2	1
No. Occupants - Outdoor	1	1
Platform Railing Height	43.3" (1.1 m)	43.3" (1.1 m)
Overall Height	71.7" (1.8 m)	74.8" (1.9 m)
Platform Dimensions	24.4 x 49.2" (0.6 x 1.3 m)	24.4 x 49.2" (0.6 x 1.3 m)
—Platform Extension	21.6" (55 cm)	21.6" (55 cm)
Overall Machine Length	56.2" (1.4 m)	56.2" (1.4 m)
Overall Machine Width	30.0" (76 cm)	30.0" (76 cm)
Wheelbase	42.3" (1.1 m)	42.3" (1.1 m)
Ground Clearance	2.4" (6 cm)	2.4" (6 cm)
Lift/Lower Time	25/15 seconds	25/15 seconds
Maximum Drive Height		
— Indoor	13' (3.8 m)	15' (4.5 m)
— Outdoor	13' (3.8 m)	10' (4.5 m)
Weight*(ANSI/CSA)	1,984 lb (900 kg)	1,940 lb (880 kg)
Ground Bearing Pressure	119 psi (8.3 kg/cm ²)	116 psi (8.1 kg/cm ²)
Drive Speed—Lowered	2.4 mph (3.8 km/h)	2.4 mph (3.8 km/h)
Drive Speed—Elevated	0.5 mph (.8 km/h)	0.5 mph (.8 km/h)
Max Tilt Rating		
— Indoor (side to side)	1.75°	2.5°
— Outdoor (side to side)	1.50	1.50
Fore and Aft	3°	3°
Gradeability	25%	25%
Turning Radius (inside)	Zero	Zero
Turning Radius (outside)	55" (1.4 m)	55" (1.4 m)
Tire Size (non-marking solid)	10 x 3" (255 x 75 mm)	10 x 3" (255 x 75 mm)
Batteries	2 x 12V 105 amp-hr	2 x 12V 105 amp-hr
Charger	27 Amp	27 Amp
Pump	Fixed Displacement Gear	Fixed Displacement Gear
Hydraulic Reservoir	1.3 gal (5 L)	1.3 gal (5 L)
Brakes (on drive wheels)	Electric, Friction	Electric, Friction
Rail Type	Fixed	Fixed
Drive	24V DC	24V DC

*Certain weights and dimensions may vary due to options and to compliance with country standards.
Complies with ANSI 92.20 regulations.
Specifications may change to meet country standards or with addition of optional equipment.

ES Series

Electric Scissor Lifts

	ES1932i	ES1932	2632ES	2646ES	3246ES
Platform Height—Elevated	19' (5.79 m) - Indoor Only	19' (5.79 m)	25' 6" (7.77 m) - Indoor Only	26' (7.92 m)	31' 9" (9.68 m)
Platform Height—Lowered	38.6" (981 mm)	38.6" (981 mm)	48.5" (1.23 m)	49.5" (1.26 m)	49.5" (1.26 m)
Platform Capacity (Indoor/Outdoor)	507/NA (230/NA kg) ¹	507/507 (230/230 kg) ²	800/500 lb (363/227 kg) Indoor Only ³	1,000/500 lb (454/227 kg) ⁴	1,000/700 lb (454/318 kg) ⁵
—Capacity on Deck Extension	265 lb (120 kg)	265 lb (120 kg)	265 lb (120 kg)	265 lb (120 kg)	265 lb (120 kg)
No. Occupants - Indoor	1	2	2	2	2
No. Occupants - Outdoor	0	1	0	1	1
Platform Railing Height	44.4" (1.13 m)	44.4" (1.13 m)	44.9" (1.14 m)	43.3" (1.10 m)	43.3" (1.10 m)
Overall Height	82.8" (2.10 m)	82.8" (2.10 m)	7' 9.4" (2.37 m)	7' 8.8" (2.36 m)	7' 8.8" (2.36 m)
—With Rails Folded	78.2 (1.99m)	78.2 (1.99m)	6' 6" (1.98 m)	6' 6" (1.98 m)	6' 6" (1.98 m)
Platform Dimensions	62.7 x 25.4" (1.59 x .64 m)	62.7 x 25.4" (1.59 x .64 m)	30 x 90.5" (0.76 x 2.3 m) [*]	44 x 98.5" (1.12 x 2.5 m) [*]	44 x 98.5" (1.12 x 2.5 m) [*]
—Platform Extension	36" (91 cm)	36" (91 cm)	35.5" (90 cm)	50" (127 m)	50" (127 m)
Overall Machine Length	68.7" (1.74 m)	68.7" (1.74 m)	7' 6.5" (2.3 m)	8' 2.5" (2.5 m)	8' 2.5" (2.5 m)
Overall Machine Width	32" (81 cm)	32" (81 cm)	32" (81 cm)	46" (1.17 m)	46" (1.17 m)
Wheelbase	53" (1.34 m)	53" (1.34 m)	6' 2" (1.88 m)	6' 10" (2.09 m)	6' 10" (2.09 m)
Ground Clearance	2.8" (7 cm)	2.8" (7 cm)	3.5" (89 mm)	5" (127 mm)	5" (127 mm)
Lift/Lower Time	22/24 seconds	22/24 seconds	33/37 seconds	45/50 seconds	55/62 seconds
Maximum Drive Height	19' (5.79 m) - Indoor Only	19' (5.79 m)	25' 6" (7.77 m)	26' (7.92 m)	31' 9" (9.68 m)
Weight*(ANSI/CSA)	2,675 lb (1,213 kg)	3,353 lb (1,521 kg)	4,700 lb (2,132 kg)	6,035 lb (2,737 kg)	6,450 lb (2,926 kg)
Ground Bearing Pressure	103 psi (7.2 kg/cm ²)	114 psi (8.0 kg/cm ²)	90 psi (6.33 kg/cm ²)	87 psi (6.11 kg/cm ²)	87 psi (6.11 kg/cm ²)
Drive Speed—Lowered	3 mph (4.8 km/h)	3 mph (4.8 km/h)	2.8 mph (4.43 km/h)	2.5 mph (4.02 km/h)	2.5 mph (4.02 km/h)
Drive Speed—Elevated	0.5 mph (0.8 km/h)	0.5 mph (0.8 km/h)	0.5 mph (0.8 km/h)	0.5 mph (0.8 km/h)	0.5 mph (0.8 km/h)
Max Tilt Rating					
Indoor	2.75°	1.75°	1.50°	2.0°	2.0°
Outdoor	n/a	1.50°	n/a	2.0 degrees	2.0 degrees
Fore and Aft	2.75°	3.75°	3.0 degrees	3.0 degrees	3.0 degrees
Gradeability	25%	25%	25%	25%	25%
Turning Radius (inside)	Zero	Zero	Zero	Zero	Zero
Turning Radius (outside)	66" (1.68 m)	66" (1.68 m)	81" (2.06 m)	95.1" (2.41 m)	95.1" (2.41 m)
Tire Size (non-marking solid)	12.7" x 4" (323 x 100mm)	12.7" x 4" (323 x 100mm)	16 x 5" (406 x 125 mm)	16 x 5" (406 x 125 mm)	16 x 5" (406 x 125 mm)
Batteries	4 x 6V 220 amp-hr	4 x 6V 220 amp-hr	4 x 6V, 220 amp-hr	4 x 6V, 220 amp-hr ^t	4 x 6V, 220 amp-hr ^t
Charger	27 amp	27 amp	20 Amp Automatic (120V/240V – 50/60Hz)	20 Amp Automatic (120V/240V – 50/60Hz)	20 Amp Automatic (120V/240V – 50/60Hz)
Pump	Fixed Displacement Gear	Fixed Displacement Gear	Fixed Displacement Gear	Fixed Displacement Gear	Fixed Displacement Gear
Hydraulic Reservoir	1 gal (3.8L)	1 gal (3.8L)	1.25 gal. (4.73 L)	1.7 gal. (6.4 L)	1.7 gal. (6.4 L)
Brakes (on drive wheels)	Multi-Disc Friction	Multi-Disc Friction	Electric, Friction	Electric, Friction	Electric, Friction
Rail Type	QuikFold	QuikFold	Fold Down	Fold Down	Fold Down
Drive	24V DC	24V DC	24V DC	24V DC	24V DC

*Certain weights and dimensions may vary due to options and to compliance with country standards.

^tOptional 4 x 6V, 245 amp-hr

Specifications may change to meet country standards or with addition of optional equipment.

1. ES1932i - 507 lb unrestricted (indoor only use)

2. ES1932 - 507 lb unrestricted (indoor/outdoor)

3. 2632ES - 800lb restricted to 20' (indoor); 500lb unrestricted (indoor)

4. 2646ES - 1000lb unrestricted (indoor); 500lb unrestricted (outdoor)

5. 3246ES - 1000lb restricted to 26' (indoor); 700lb unrestricted (indoor/outdoor)

Note: Throughout 2020, electric drive models will transition to 'ES' at the front of the model designation.

DaVinci Series - All Electric AE1932 Scissor Lift

**NEW MODEL
COMING
FALL 2020**

AE1932

Platform Height (indoor)	19' (5.79 m)
Platform Height (outdoor)	19' (5.79 m)
Platform Height — Lowered	38.7" (.982 m)
Platform Railing Height ¹	44.4" (1.28 m)
Overall Height	83.2" (2.11 m)
— With Rails Folded	78.2" (1.99 m)
Platform Dimensions	62.7 x 25.4" (1.59 x .64 m)
— Platform Extension	36" (91.4 cm)
Overall Machine Length	68.7" (1.74 m)
Overall Machine Width	32" (81 cm)
Wheelbase	53" (1.34 m)
Ground Clearance	2.8" (7 cm)
Platform Capacity (indoor)	606 lb (275 kg)
Platform Capacity (outdoor)	606 lb (275 kg)
— Capacity on Deck Extension	265 lb (120 kg)
No. of Occupants	
— Indoor	2
— Outdoor	1
Lift/Lower Time	24/26 seconds
Maximum Drive Height (indoor)	Full Height
Maximum Drive Height (outdoor)	Full Height
Weight ²	3,450 lb (1,565 kg)
Ground Bearing Pressure	150psi (10.5 kg/cm ²)
Drive Speed — Lowered	4 mph (6.4 km/h)
Drive Speed — Elevated	0.5 mph (0.8 km/h)
Max Tilt Rating	
— Indoor (side to side)	1.75°
— Outdoor (side to side)	1.5°
— Fore and Aft	3.75°
Gradeability	25%
Turning Radius (inside)	Zero
Turning Radius (outside)	66" (1.68 m)
Tire Size (non-marking solid)	12.5" x 4" (323 x 100 mm)
Battery	Single 24V Lithium Ion, 72 aH
Charger	27 amp
Lift System	Fully electric
Steer System	Fully electric
Brakes (on drive wheels)	Multi-Disc Friction
Rail Type	QuikFold
Drive	24V AC



KEY SPECS

- **Platform Height:** 19' (5.8 m) indoor/outdoor
- **Platform Capacity:** 606 lb (275 kg) indoor/outdoor - **20% improvement**
- **Charge Time:** 3.5 hours - **3X improvement**
- **Stowed Drive Speed:** 4 mph (5.2 kph) - **2X improvement**

KEY FEATURES

- New industry benchmark - improved cost of ownership through almost no maintenance, with a new diagnostic and analyzer tool that can be used on any smart device
- Class-leading, single Lithium Ion battery lasts the life of the machine
- Quick-charge in five minutes for 100' of drive plus enough torque for loading
- Efficient AC drive motors provide 4 mph stowed drive speed and independent wheel motor control to reduce tire wear and limit damage to sensitive flooring
- Fully electric, highly efficient for zero emissions and zero leaks
- ANSI A92.20 compliant with load sensing system, self-closing gate and QuikFold rail system

1. Platform railing height with standard QuikFold Rails

2. Certain weights and dimensions may vary due to options and to compliance with country standards.

ERT Series

Electric Rough Terrain Scissors

**NEW MODELS
COMING
FALL 2020**

	ERT2669	ERT3369	ERT4069	ERT4769
Platform Height	26'2" (7.98m)	32'8" (9.96 m)	40'3" (12.3 m)	47' (14.3 m)
Platform Height — Lowered	4'3" (1.3 m)	4'9" (1.46 m)	4'10" (1.46 m)	5'4" (1.62 m)
Platform Capacity (Single Extension)	1,500 lb (680 kg)	1,000 lb (453.59 kg)	800 lb (363 kg)	800 lb (363 kg)
— Capacity on Deck Extension	300 lb (136 kg)			
No. Occupants (Indoor/Outdoor)	4/4	4/2	3/2	3/2
Platform Railing Height	44.7" (1.14 m)	44.7" (1.14 m)	44.7" (1.14 m)	44.7" (1.14 m)
Overall Height	96.7" (2.46 m)	102.9" (2.61 m)	103" (2.62 m)	109.1" (2.77 m)
Platform Dimensions	126.3 x 56.9" (3.21 x 1.45 m)			
— Platform Extension	42" (1.07 m)	42" (1.07 m)	42" (1.07 m)	42" (1.07 m)
Overall Machine Length	139" (3.53 m)	139" (3.53 m)	139" (3.53 m)	139" (3.53 m)
Overall Machine Width	69.3" (1.76 m)	69.3" (1.76 m)	69.3" (1.76 m)	69.3" (1.76 m)
Wheelbase	81.3" (2.07 m)	81.3" (2.07 m)	81.3" (2.07 m)	81.3" (2.07 m)
Ground Clearance	10.1" (25.7 cm)	10.1" (25.7 cm)	10.1" (25.7 cm)	10.1" (25.7 cm)
Lift/Lower Time	36/28 seconds	42/33 seconds	69/46 seconds	81/55 seconds
Maximum Drive Height	Full Height	Full Height	Full Height	Full Height
Weight (single extension w/out leveling jacks)*	8,627 lb (3,913 kg)	9,427 lb. (4,276 kg)	10,560 lb (4,790 kg)	13,636 lb (6,194 kg)
Drive Speed — Lowered	3.5 mph (5.6 km/h)			
Drive Speed — Elevated	0.5 mph (0.8 km/h)			
Gradeability	40%	40%	35%	30%
Turning Radius (inside)	83" (2.11 m)	83" (2.11 m)	83" (2.11 m)	83" (2.11 m)
Turning Radius (outside)	174.8" (4.44 m)	174.8" (4.44 m)	174.8" (4.44 m)	174.8" (4.44 m)
Tire size (non-marking)	26 x 12 Foam Filled			
Rail Type	Fold Down	Fold Down	Fold Down	Fold Down
Drive (2WD)	AC Electric Drive	AC Electric Drive	AC Electric Drive	AC Electric Drive
Generator Set (Kubota Stage V OC60-E4)	6hp (4.5kW)	6hp (4.5kW)	6hp (4.5kW)	6hp (4.5kW)
Hydraulic Reservoir	13.2 gal (50L)	13.2 gal (50L)	13.2 gal (50L)	13.2 gal (50L)

Specifications may change without notice to meet country standards or with addition of optional equipment.

RT Series Rough Terrain Scissor Lift

**NEW MODELS
COMING
FALL 2020**

	RT2669	RT3369	RT4069	RT4769
Platform Height	26'2" (7.98m)	32'8" (9.96 m)	40'3" (12.3 m)	47" (14.3 m)
Platform Height — Lowered	4'3" (1.3 m)	4'9" (1.46 m)	4'10" (1.46 m)	5'4" (1.62 m)
Platform Capacity (Single Extension)	1,500 lb (680 kg)	1,000 lb (454 kg)	800 lb (363 kg)	800 lb (363 kg)
— Capacity on Deck Extension	300 lb (136 kg)			
No. Occupants (Indoor/Outdoor)	4/4	4/2	3/2	3/2
Platform Railing Height	44.7" (1.14 m)	44.7" (1.14 m)	44.7" (1.14 m)	44.7" (1.14 m)
Overall Height	96.7" (2.46 m)	102.9" (2.61 m)	103" (2.62 m)	109.1" (2.77 m)
Platform Dimensions	126 x 57" (3.21 x 1.45 m)			
— Platform Extension	42" (1.07 m)	42" (1.07 m)	42" (1.07 m)	42" (1.07 m)
Overall Machine Length	139" (3.53 m)	139" (3.53 m)	139" (3.53 m)	139" (3.53 m)
Overall Machine Width	69.3" (1.76 m)	69.3" (1.76 m)	69.3" (1.76 m)	69.3" (1.76 m)
Wheelbase	81.3" (2.07 m)	81.3" (2.07 m)	81.3" (2.07 m)	81.3" (2.07 m)
Ground Clearance	10.1" (25.7 cm)	10.1" (25.7 cm)	10.1" (25.7 cm)	10.1" (25.7 cm)
Lift/Lower Time	36/28 seconds	42/33 seconds	69/46 seconds	81/55 seconds
Maximum Drive Height	Full Height	Full Height	Full Height	Full Height
Weight (single extension w/out leveling jacks)*	8,058 lb (3,655 kg)	8,856 lb. (4,017 kg)	10,536 lb (4,779 kg)	13,635 lb (6,185 kg)
Drive Speed— Lowered	3.5 mph (5.6 km/h)			
Drive Speed— Elevated	0.5 mph (0.8 km/h)			
Gradeability	40%	40%	35%	30%
Turning Radius (inside)	83" (2.11 m)	83" (2.11 m)	83" (2.11 m)	83" (2.11 m)
Turning Radius (outside)	174.8" (4.44 m)	174.8" (4.44 m)	174.8" (4.44 m)	174.8" (4.44 m)
Tire size	26 x 12 Foam Filled			
Rail Type	Fold Down	Fold Down	Fold Down	Fold Down
Drive	4WD Hydrostatic	4WD Hydrostatic	4WD Hydrostatic	4WD Hydrostatic
Dual Fuel Engine	Kubota WG972-GL-E4 31 hp (23.2 kw)			
Diesel Engine	Kubota D1305-E4B-J 24.8 hp (18.5 kw)			
Fuel Tank Capacity	8.3gal (38L)	8.3gal (38L)	8.3gal (38L)	8.3gal (38L)
Hydraulic Reservoir	13.2 gal (50 L)			

Specifications may change without notice to meet country standards or with addition of optional equipment.

LRT Series

Rough Terrain Scissor Lifts

	330LRT	430LRT	530LRT
Platform Height—Elevated	33' (10.06 m)	43' (13.11 m)	53' (16.5 m)
Platform Height—Lowered	5' 3.57" (1.97 m)	6' 5" (1.84 m)	7' (2.13 m)
No. Occupants	6	6	6
Platform Railing Height	43.5" (1.1 m)	43.5" (1.1 m)	43.5" (1.1 m)
Overall Height	9' 1" (2.8 m)	9' 10" (3.0 m)	10' 5" (3.2 m)
—With Rails Lowered	6' 5.75" (1.97 m)	7' 2.4" (2.19 m)	7' 9" (2.36 m)
Platform Size	79 x 154" (1.95 x 3.92 m)	79 x 154" (1.95 x 3.92 m)	73.5 x 156" (1.87 x 3.96 m)
Platform Extension	4' (1.22 m)	4' (1.22 m)	4' (1.22 m)
Overall Length	12' 10" (3.92 m)	12' 10" (3.92 m)	17' (5.18 m)
Overall Width	7' 9" (2.36 m)	7' 9" (2.36 m)	7' 7" (2.31 m)
Wheelbase	9' 9" (2.97 m)	9' 9" (2.97 m)	9' 9" (2.97 m)
Ground Clearance	13.6" (34.5 cm)	13.6" (34.5 cm)	12" (30 cm)
Platform Capacity	2,250 lb (1,020 kg)	1,500 lb (680 kg)	1,500 lb (680 kg)
—Capacity on Extension	500 lb (227 kg)	500 lb (227 kg)	500 lb (227 kg)
—Capacity w/Dual Extensions	2,000 lb (907 kg)	1,250 lb (567 kg)	1,250 lb (567 kg)
Lift/Lower Time	35/32 seconds	45/42 seconds	65/60 seconds
Maximum Drive Height	Full Height	Full Height	32' (9.75 m)
Weight w/One Extension*	11,820 lb (5,372 kg)	14,300 lb (6,486 kg)	17,000 lb (7,711 kg)
Ground Bearing Pressure**	73 psi (5.1 kg/cm ²)	83 psi (5.8 kg/cm ²)	90 psi (6.3 kg/cm ²)
Drive Speed	3.5 mph (4.8 km/h)	3.5 mph (4.8 km/h)	3.5 mph (5.6 km/h)
Tilt Rating	3°	3°	1.5°
Gradeability	45%	45%	40%
Turning Radius (inside)	8' 10.5" (2.71 m)	8' 10.5" (2.71 m)	9' (2.74 m)
Turning Radius (outside)	19' 5.5" (5.93 m)	19' 5.5" (5.93 m)	19' 9" (6.02 m)
Tire Size/Type	33 x 15.5 Superwide	33 x 15.5 Superwide	12 x 16.5 Foam-filled
Axle Oscillation	8" (20 cm)	8" (20 cm)	8" (20 cm)
Brakes—4 Wheel	Spring Applied	Spring Applied	Spring Applied
Dual Fuel Engine	Kubota W6972 31 hp (23 kW)	Kubota W6972 31 hp (23 kW)	Kubota W6972 31 hp (23 kW)
Diesel Engine	Kubota D1305 24.8 hp (18.5 kW)	Kubota D1305 24.8 hp (18.5 kW)	Kubota D1305 24.8 hp (18.5 kW)
Fuel Tank Capacity	22 gal. (83.3 L)	22 gal. (83.3 L)	22 gal. (83.3 L)
Hydraulic Reservoir	32 gal. (121.42 L)	32 gal. (121.42 L)	32 gal. (121.42 L)

*Certain options or country standards increase weight.

**Ground bearing pressure applies to standard tires.

Specifications may change without notice to meet country standards or with addition of optional equipment.

NOTE: LRT model nomenclature will change in fall of 2020.

1230ES

Electric Vertical Mast Lift

1230ES

Platform Height — Elevated	12' (3.66 m)
Platform Height — Lowered	1' 10" (0.56 m)
Platform Railing Height	3' 7" (1.10 m)
Overall Height	5' 5" (1.66 m)
Platform Size	27 x 33" (0.68 x .84 m)
Overall Length	4' 6" (1.36 m)
Overall Width	2' 6" (0.76 m)
Wheelbase	3' 5" (1.04 m)
Ground Clearance	3" (7.6 cm)
Platform Capacity	500 lb (227 kg)
Lift/Lower Time	12/12 seconds
Maximum Drive Height	Full Height
Weight	1,765 lb (801 kg)
Ground Bearing Pressure	123 psi (8.65 kg/cm ²)
Drive Speed — Lowered	3 mph (4.8 km/h)
Drive Speed — Elevated	0.5 mph (0.8 km/h)
Gradeability	25%
Turning Radius (inside)	5" (13 cm)
Turning Radius (outside)	4' 10" (1.46 m)
Tire Size/Type	100 x 323 Non-Marking Solid
Brakes (on drive wheels)	Electric, Friction
Batteries	4 x 6V, 220 amp-hr
Charger	20 Amp Automatic (120V/240V - 50/60 HZ)
Drive	24V Electric
Hydraulic Reservoir	1.88 gal. (7.1 L)

20MVL

Mobile Vertical Mast Lifts

20MVL

Platform Height	19' 1" (5.81 m)
Working Height	25' 1" (7.80 m)
Drive Height	Max. Platform Height
Overall Height Stowed	78" (1.98 m)
Platform Entry Height	18" (46 cm)
Platform Capacity - Oversized/Narrow/Extension	350 lb (159 kg)
Narrow Platform	350 lb (159 kg)
Extension Platform	350 lb (159 kg)
Oversized Platform Size (gull wing front entry)	28 x 26" (71 x 66 cm)
Narrow Platform Size	22 x 25" (56 x 63 cm)
Extension Platform Size—Retracted	26 x 26" (66 x 66 cm)
Extended	26 x 49" (66 x 125 cm)
Overall Vehicle Length	
Chassis Length	53.5" (136 cm)
Extension Platform Retracted	54.6" (140 cm)
Overall Vehicle Width	
Chassis Width	29.5" (0.75 m)
Extension Platform	32.2" (82 cm)
Weight	
Gull Wing Platform	2,363 lb (1,072 kg)
Extension Platform	2,433 lb (1,104 kg)
Maximum Drive Speed	
Platform: Lowered/Elevated	3.5 mph (5.5 km/h)/0.6 mph (1 km/h)
Turning Radius	Zero
Gradeability	25%
Ground Clearance	2" (5 cm)
Wheel & Batteries	
Rear Drive & Steer Wheels	12.62 x 4" (32 x 10 cm)
Front Caster Wheels	8 x 2.5" (20 x 6 cm)
Standard Tire Material	Non-Marking
Batteries	Two Sealed-100 AH 12 Volt
Battery Charger	25 Amp; 5-Hour Charge
Drive System	4 Brush Direct Electric Drive (planetary gear)

MSP Series

Mobile Stock Pickers

	10MSP	20MSP
Platform Height	10' (3.05 m)	19' 5" (5.92 m)
Working Height	16' (4.88 m)	25' 5" (7.75 m)
Drive Height	Max. Platform Height	Max. Platform Height
Stowed Height	57" (145 cm)	78" (198 cm)
Stock Picking Platform Entry Height	13.75" (35 cm)	18" (46 cm)
Extension Platform Entry Height	N/A	19" (48 cm)
Stock Picking Platform Capacity	350 lb (159 kg)	400 lb (181 kg)
Material Tray Capacity	250 lb (113 kg)	150 lb (68 kg)
Carry Deck Capacity	250 lb (113 kg)	N/A
Stock Picking Platform Size	20 x 27" (49.5 x 69 cm)	28 x 48" (71 x 122 cm)
Platform Size with Folding Material Tray	N/A	23 x 30" (58 x 76 cm)
Overall Vehicle Length		
Chassis Length	61" (155 cm)	53.5" (136 cm)
Stock Picking Platform	N/A	74" (188 cm)
Platform with Folding Material Tray	N/A	78" (198 cm)
Overall Vehicle Width		
Chassis Width	N/A	29.5" (75 cm)
Chassis Width with Bumper	32.5" (82.5 cm)	N/A
Stock Picking Platform	N/A	31.5" (80 cm)
Extension Platform	N/A	31.5" (80 cm)
Gross Vehicle Weight		
Stock Picking Platform	1,100 lb (499 kg)	2,363 lb (1,072 kg)
Extension Platform	N/A	2,433 lb (1,104 kg)
Drive Maximum Speed		
Platform: Lowered/Elevated	5.0 mph (8.0 km/h)/0.5 mph (0.8 km/h)	3.5 mph (5.5 km/h)/0.6 mph (0.96 km/h)
Turning Radius	Zero	Zero
Intersecting Aisle (assume turning out of 36" aisle)	66" (168 cm)	80" (203 cm)
Gradeability	15%	25%
Underclearance	2" (5 cm)	2" (5 cm)
Wheel & Batteries		
Rear Drive & Steer Wheels	12.62 x 4" (32 x 10 cm)	12.62 x 4" (32 x 10 cm)
Front Caster Wheels	8 x 2.5" (20 x 6 cm)	8 x 2.5" (20 x 6 cm)
Standard Tire Material	Non-Marking	Non-Marking
Batteries	4 Sealed 210 amp-hr Maintenance Free (AGM)	2 Sealed 100 amp-hr Maintenance Free (AGM)
Battery Charger	25 Amp Automatic	25 Amp Automatic
Drive System	4 Brush Direct Electric Drive (planetary gear)	4 Brush Direct Electric Drive (planetary gear)

Specifications may change to meet country standards or with addition of optional equipment.




Toucan® Series Mast-Style Boom Lifts

	20E	26E	32E
Platform Height	20' 4" (6.2 m)	26' 6" (8.10 m)	32' 3" (9.83 m)
Horizontal Outreach	6' 5" (1.97 m)	8' 8" (2.64 m)	14' 11" (4.55 m)
Up and Over Height	17' 7" (5.36 m)	21' 5" (6.51 m)	22' 9" (6.95 m)
Swing	345° Non-Continuous	345° Non-Continuous	345° Non-Continuous
Platform Capacity	500 lb (227 kg)	500 lb (227 kg)	500 lb (227 kg)
Platform Rotator	N/A	N/A	120° Hydraulic
Jib (range of articulation)	112° (+45, -67) Vertical	127° (+66, -61) Vertical	125° Vertical/10-15' Telescopic
A. Platform Size	33 x 38" (0.85 x 0.92 m)	29 x 36" (0.7 x 0.9 m)	27.5 x 41.3" (0.70 x 1.05 m)
B. Overall Width	3' 3" (0.99 m)	3' 9" (1.14 m)	3' 11" (1.20 m)
C. Tailswing	6.7" (17 cm)	2.24" (5.68 cm)	6" (15 cm)
D. Height Stowed	6' 6" (1.99 m)	6' 6.3" (1.99 m)	6' 5" (1.99 m)
E. Stowed Length	6' 10.3" (2.09 m)	9' 3" (2.81 m)	11' 8" (3.60 m)
F. Wheelbase	3' 11" (1.19 m)	3' 11" (1.19 m)	5' 3" (1.6 m)
G. Ground Clearance	3.9" (10 cm)	3" (8 cm)	3.1" (8 cm)
Weight*	4,875 lb (2,210 kg)	6,900 lb (3,130 kg)	10,140 lb (4,600 kg)
Ground Bearing Pressure**	255 psi (17.9 kg/cm ²)	319 psi (22.4 kg/cm ²)	185 psi (13 kg/cm ²)
Drive Speed	3.4 mph (5.5 km/h)	3.4 mph (5.5 km/h)	3.4 mph (5.5 km/h)
Gradeability	25%	25%	25%
Turning Radius (inside)	1' 10" (0.55 m)	1' 10" (0.55 m)	2' 5" (0.74 m)
Turning Radius (outside)	6' 6" (1.99 m)	6' 6" (1.99 m)	8' 6" (2.6 m)
Tire Size/Type	16 x 5 x 10.5 Non-Marking	125 x 406 Non-Marking	18 x 7 x 12.12 Non-Marking
Electrical System	24V DC	24V DC	48V DC
Batteries	4x6V 213Ah AGM	260 amp-hr	260 amp-hr
Battery Charger	25 amps	25 amps	20 amps
Drive Motors	2 — A.C.	2 — A.C.	2 — A.C.
Brakes	Spring Applied Disc	Spring Applied Disc	Spring Applied Disc
Hydraulic Motor/Pump	6.4 hp/ 3.3 cc/rev	6.4 hp/ 5.2 cc/rev	6.4 hp/ 5.2 cc/rev
Hydraulic Reservoir	5.3 gal. (20 L)	1.85 gal. (7 L)	5.8 gal. (22 L)




*Certain options or country standards increase weight.

**Ground bearing pressure applies to standard tires.




20E

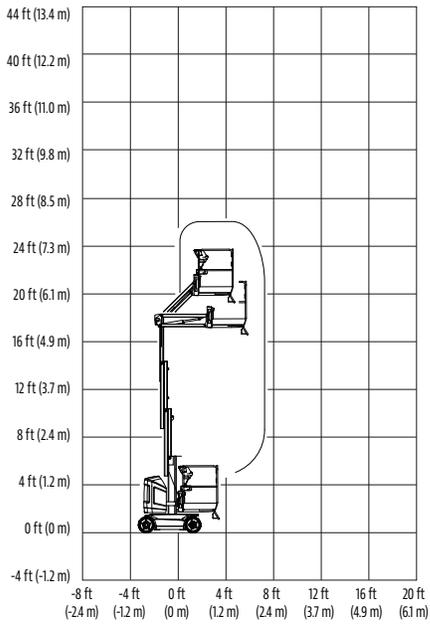

26E

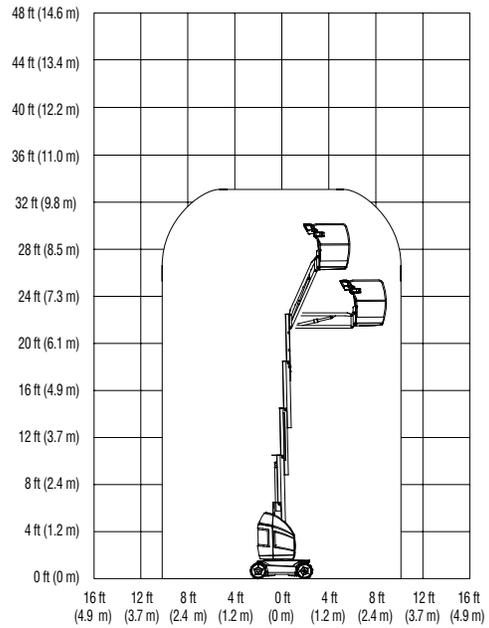

32E

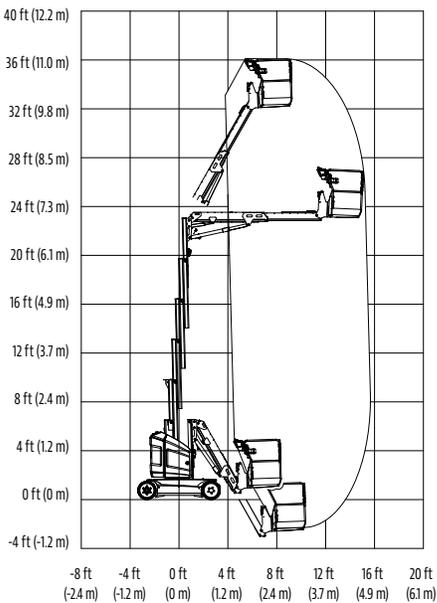

SPECIAL FEATURES INCLUDE:

- Compact dimensions for accessing hard-to-reach areas.
- Versatile articulating jib provides up to 14' 6" (4.42 m) up and over reach.
- 360-degree rotating mast for unmatched positioning capabilities.
- Platform rotator (standard on T32E.)
- Capacity for two workers and supplies.
- Drive through doorways and down narrow aisles.
- Navigate around multiple obstacles on the ground and in the air.
- Long lasting, environmentally friendly electric power.

Compact Crawler Series Electric & Hybrid Boom Lifts






	X430AJ	X500AJ	X600AJ	X770AJ	X1000AJ
Platform Height	43' 6" (13.30 m)	49' (14.95 m)	59' 3" (18.05 m)	77' 5" (23.60 m)	100' (30.48 m)
Horizontal Outreach	21' 7" (6.60 m)	23' (7.00 m)	30' (9.1 m)	43' (13.1 m)	54' 2" (16.50 m)
Swing	360° Non-continuous	360° Non-continuous	360° Non-continuous	360° Non-continuous	360° Non-continuous
Max. Platform Capacity	500 lb (227 kg)	500 lb (227 kg)	500 lb (227 kg)	500 lb (227 kg)	500 lb (227 kg)
Platform Rotation	124° (+/-62°)	124° (+/-62°)	124° (+/-62°)	124° (+/-62°)	180° (+85/-95°)
Jib (range of articulation)	89° (0/-89)	89° (0/-89)	89° (0/-89)	89° (+0/-89)	180° (+85/-95°)
Platform Size	58" x 30" (1.47 x 0.76 m)	58" x 30" (1.47 x 0.76 m)	58" x 30" (1.47 x 0.76 m)	58" x 30" (1.47 x 0.76 m)	63" x 28" (1.60 x 0.71 m)
Overall Width	29" (0.75 m)	31" (0.78 m)	31" (0.78 m)	39" (0.99 m)	47" (1.19 m)
Stowed Height	6' 6" (1.98 m)	6' 6" (1.98 m)	6' 6" (1.98 m)	6' 6" (1.98 m)	6' 6" (1.98 m)
Outrigger Footprint Narrow	9' 8" x 9' 8" (3.0 m x 3.0 m) N/A	10' 5" x 10' 5" (3.17 x 3.17 m) N/A	10' 7" x 10' 7" (3.22 x 3.22 m) N/A	14' 6" x 14' 3" (4.41 x 4.31 m) 19' 2" x 9' 3" (5.84 x 2.81 m)	18' 2" x 16' 5" (5.49 x 5 m) 22' x 12' 2" (6.71 x 3.71 m)
Stowed Length Without Basket	13' 2" (4.02 m) 11' 2" (3.40 m)	14' 10" (4.53 m) 13' 8" (4.16 m)	16' 5" (5.01 m) 15' 3" (4.65 m)	20' 9" (6.34 m) 19' 7" (5.98 m)	21' 3" (6.48 m) 19' 3" (5.80 m)
Outrigger Footprint	9' 8" x 9' 8" (3.0 m x 3.0 m)	10' 5" x 10' 5" (3.17 x 3.17 m)	10' 7" x 10' 7" (3.22 x 3.22 m)	14' 3" x 14' 6" (4.31 x 4.41 m)	18' 2" x 16' 5" (5.49 x 5 m)
Stowed Length	13' 2" (4.02 m)	14' 10" (4.53 m)	16' 5" (5.01 m)	20' 9" (6.34 m)	21' 3" (6.48 m)
Track Length	4' 1" (1.24 m)	4' 1" (1.24 m)	4' 10" (1.47 m)	6' 10" (2.08 m)	6' 10" (2.08 m)
Weight*	4,392 lb (1,992 kg)	5,071 lb (2,300 kg)	6,571 lb (2,980 kg)	9,665 lb (4,385 kg)	16,790 lb (7,616 kg)
Ground Bearing Pressure Outriggers	34.1 psi (2.40 kg/cm ²)	35.53 psi (2.49 kg/cm ²)	44.09 psi (3.09 kg/cm ²)	65.3 psi (4.50 kg/cm ²)	58 psi (4.1 kg/cm ²)
Tracks	8.20 psi (0.58 kg/cm ²)	9.72 psi (0.68 kg/cm ²)	9.28 psi (0.65 kg/cm ²)	7.8 psi (0.54 kg/cm ²)	11.3 psi (0.79 kg/cm ²)
Drive Speed	0.87 mph (1.4 km/h)	0.8 mph (1.3 km/h)	0.8 mph (1.3 km/h)	0.7 mph (1.2 km/h)	0.8 mph (1.3 km/h)
Gradeability	28%	28%	28%	28%	28%
Gasoline Engine	Honda iGX390 11.7 hp (8.7 kW)	Honda iGX390 11.7 hp (8.7 kW)	Honda iGX390 11.7 hp (8.7 kW)	Diesel Kubota D902 21.6 hp (16.1 kW)	Diesel Kubota D902 21.6 hp (16.1 kW)
Electric System (Optional)	100Ah 36V Lithium-Ion	100Ah 48V Lithium-Ion	100Ah 72V Lithium-Ion	100Ah 76V Lithium-Ion	150Ah 76V Lithium-Ion
Fuel Tank Capacity (Diesel)	1.4 gal. (5.3 L)	1.5 gal. (5.9 L)	1.5 gal. (5.9 L)	6.6 gal. (25 L)	6.6 gal. (25 L)
AC Motor	120V 60 Hz (1.2 kW)	120V 60 Hz (1.2 kW)	120V 60 Hz (1.2 kW)	120V 60 Hz (1.2 kW)	120V 60 Hz (1.2 kW)
Outrigger Pad Diameter	11.8"	11.8"	11.8"	11.8"	15.7"

*Certain options or country standards increase weight.



SPECIAL FEATURES INCLUDE:

- Ease of transport — Fits on a trailer (low weight, compact).
- Enhanced maneuverability and accessibility — Compact dimensions, rubber tracks, remote drive, adjustable track widths for increased stability and platform rotation.
- Environmentally friendly — Boom functions may be powered by AC motor for operation indoors, or in noise-sensitive areas.
- Automatic one button leveling.
- SkyGuard®

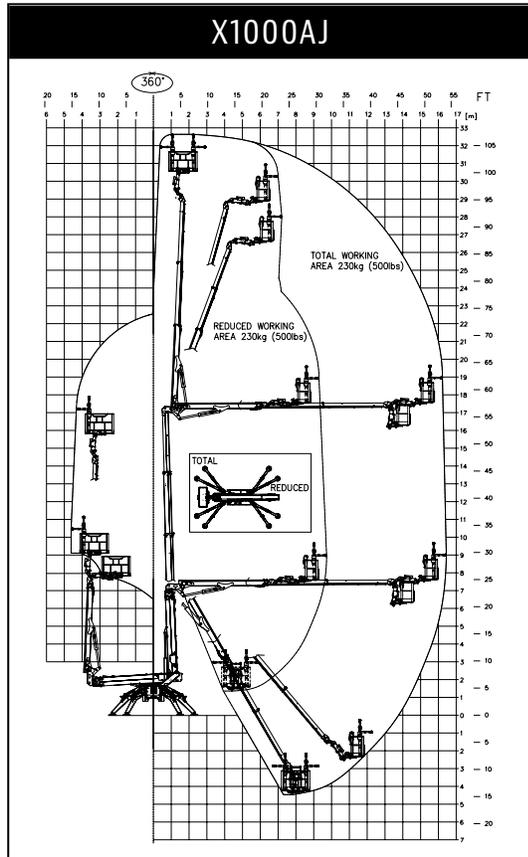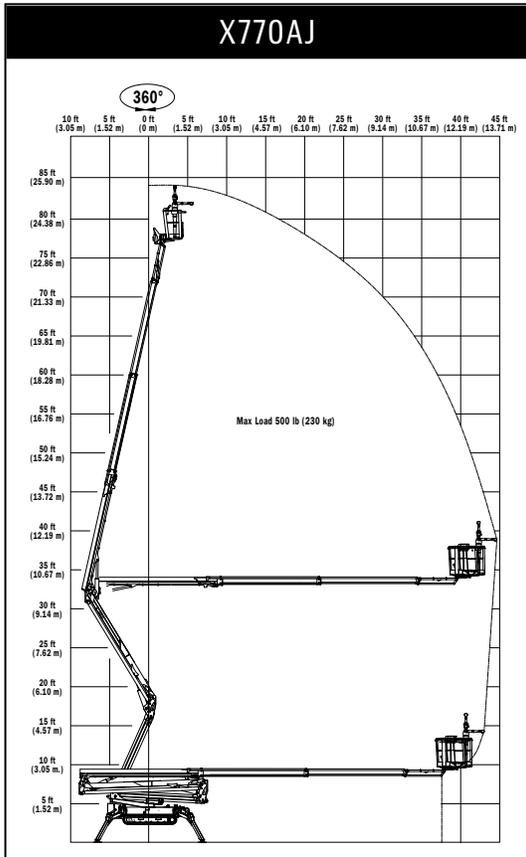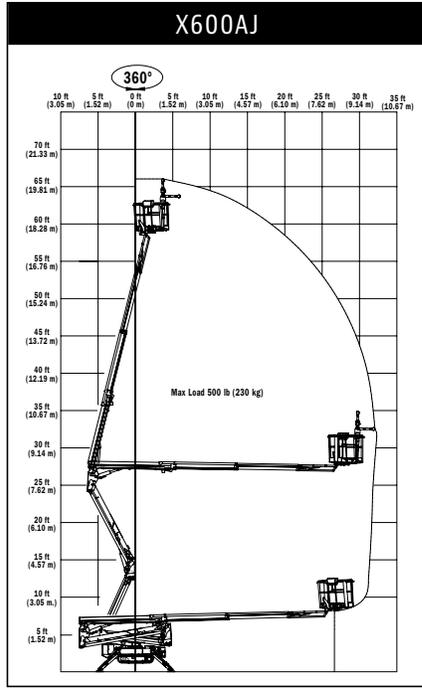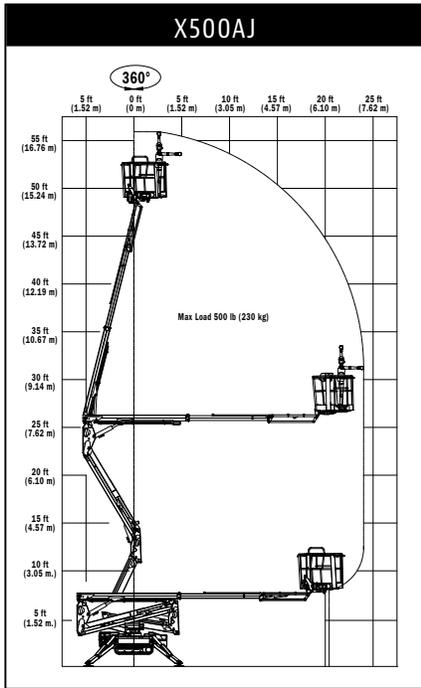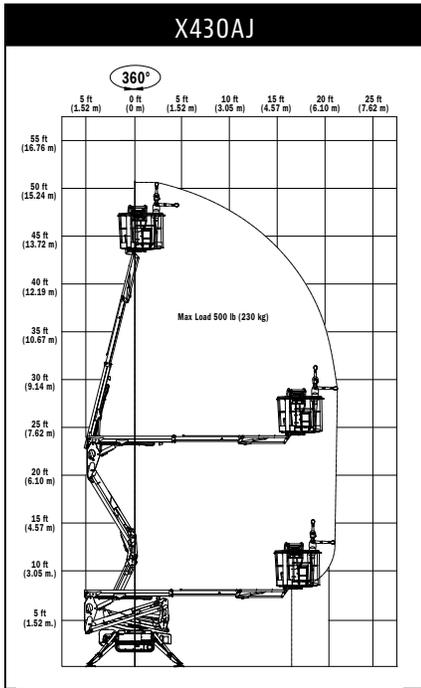

E300AJP

Electric & Hybrid Boom Lifts

E300AJP



Platform Height	29' 5" (8.96 m)
Horizontal Outreach	20' 1" (6.12 m)
Up and Over Height	13' 2" (4.01 m)
Swing	350° Non-Continuous
Platform Capacity	500 lb (227 kg)
Platform Rotator	180° Hydraulic
Jib (range of articulation)	144° (+84, -60) Vertical/180° Horizontal
A. Platform Size	30 x 48" (0.76 x 1.22 m)
B. Overall Width	4' (1.22 m)
C. Tailswing	Zero
D. Stowed Height	6' 7" (2.01 m)
E. Stowed Length	18' 10" (5.74 m)
F. Wheelbase	5' 5" (1.65 m)
G. Ground Clearance	4" (10 cm)
Weight*	15,705 lb (7,123 kg)
Ground Bearing Pressure**	170 psi (11.95 kg/cm ²)
Drive Speed	4.5 mph (7.2 km/h)
Gradeability	25%
Turning Radius (inside)	5' (1.52 m)
Turning Radius (outside)	10' 2" (3.1 m)
Tire Size/Type	25 x 7 x 12 Non-Marking
Electrical System	48V DC
Batteries	8 x 6V, 305 amp-hr
Battery Charger	20 amp
Drive Motors	Dual Electric Traction AC
Brakes	Spring Applied Multiple Discs
Hydraulic Motor/Pump	Perm. Magnet Motor/Gear Pump
Hydraulic Reservoir	2.1 gal. (7.95 L)

*Certain options or country standards increase weight.

**Ground bearing pressure applies to standard tires.

Specifications may change to meet country standards or with addition of optional equipment.

E300AJP

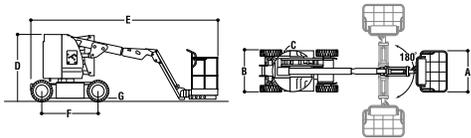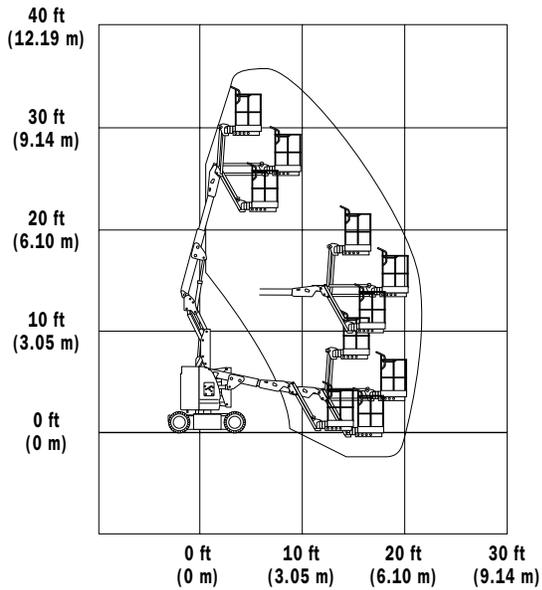

SPECIAL FEATURES INCLUDE:

- 4 ft (1.22 m) articulating jib with JibPLUS®
- ATC (Automatic Traction Control) improves performance on uneven surfaces.
- Ultra compact width of only 4 ft (1.22 m).
- Minimum up and down cycle time of only 105 seconds.
- Brushless AC motors.
- SkyGuard SkyLine™
- Load sensing system

E400AJP Narrow Electric & Hybrid Boom Lifts

	E400A Narrow	E400AJP Narrow
Platform Height	40' (12.19 m)	40' (12.19 m)
Horizontal Outreach	21' 2" (6.45 m)	22' 5" (6.83 m)
Up and Over Height	21' 6" (6.55 m)	21' 6" (6.55 m)
Swing	360° Non-Continuous	360° Non-Continuous
Platform Capacity (unrestricted)	500 lb (227 kg)	500 lb (227 kg)
Platform Rotator	180° Hydraulic	180° Hydraulic
Jib (range of articulation)	N/A	144° (+84, -60) Vertical
(JibPLUS [®])	N/A	180° Horizontal
A. Platform Size	30 x 48" (0.76 x 1.22 m)	30 x 48" (0.76 x 1.22 m)
B. Overall Width	4' 11" (1.5 m)	4' 11" (1.5 m)
C. Tailswing	4" (10 cm)	4" (10 cm)
D. Stowed Height	6' 5.75" (1.97 m)	6' 5.75" (1.97 m)
E. Stowed Length	18' 1" (5.51 m)	22' (6.71 m)
F. Wheelbase	6' 7" (2.01 m)	6' 7" (2.01 m)
G. Ground Clearance	5" (13 cm)	5" (13 cm)
Weight [*]	13,100 lb (5,942 kg)**	14,900 lb (6,759 kg)**
Ground Bearing Pressure ^{***}	95 psi (6.6 kg/cm ²)	185 psi (13.0 kg/cm ²)
Drive Speed 2WD	4.5 mph (7.2 km/h)	4.2 mph (6.7 km/h)
Gradeability 2WD	30%	30%
Turning Radius (inside)	2' 10" (86 cm)	2' 10" (86 cm)
Turning Radius (outside)	10' 4" (3.15 m)	10' 4" (3.15 m)
Tire Size/Type (front)	22 x 6 x 17.75 Solid Non-Marking	22 x 6 x 17.75 Solid Non-Marking
Tire Size/Type (rear)	25 x 7 x 12 Solid Non-Marking	25 x 7 x 12 Solid Non-Marking
Electrical System	48V DC	48V DC
Batteries	8 x 6V, 370 amp-hr	8 x 6V, 370 amp-hr
Drive Motors	Dual Electric Traction AC	Dual Electric Traction AC
Brakes	Spring Applied Multiple Discs	Spring Applied Multiple Discs
Hydraulic Motor/Pump	Perm. Magnet/Gear Pump	Perm. Magnet/Gear Pump
Hydraulic Reservoir	4 gal. (15.14 L)	4 gal. (15.14 L)



*Certain options or country standards increase weight.

**For M Models, add 300 lb (136 kg).



***Ground bearing pressure applies to standard tires.

Specifications may change to meet country standards or with addition of optional equipment.

E400A NARROW

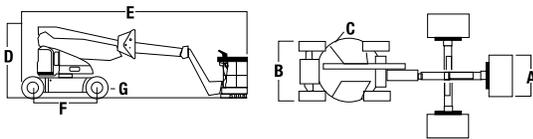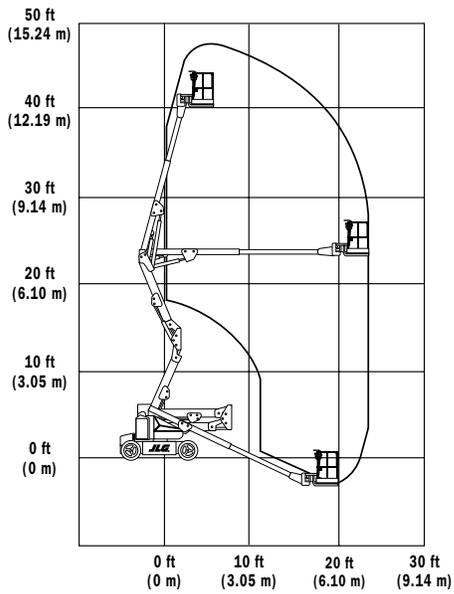

E400AJP NARROW

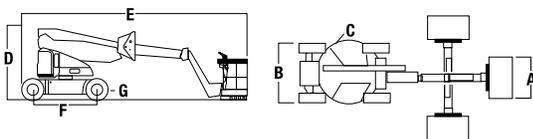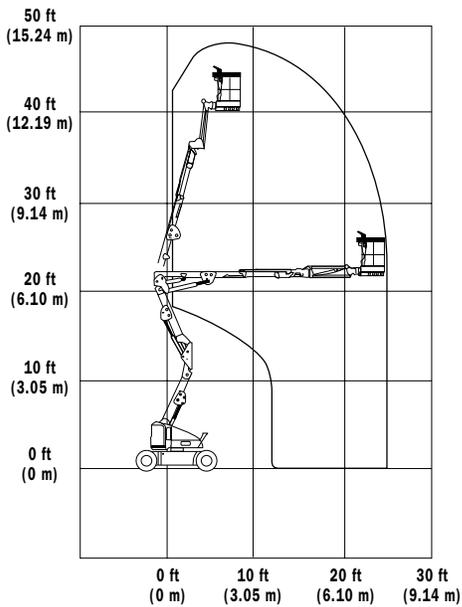

SPECIAL FEATURES INCLUDE:

- JibPLUS[®] provide access in and around confined work areas.
- 4 ft 11 in. (1.5 m) narrow chassis for maneuvering in narrow aisles and confined areas.
- ATC (Automatic Traction Control) improves performance on uneven surfaces.
- Brushless AC motors..
- SkyGuard SkyLine™
- Load sensing system

E450 Series Electric Boom Lift

E450AJ

Platform Height	45' (13.72 m)
Horizontal Outreach	23' 9" (7.24 m)
Up and Over Height	25' 3" (7.7 m)
Swing	360° Non-Continuous
Platform Capacity	500 lb (227 kg)
Platform Rotator	180° Hydraulic
Jib (range of articulation)	141° (+86, -55) Vertical
A. Platform Size	30 x 60" (0.76 x 1.52 m)
B. Overall Width	5' 9" (1.75 m)
C. Tailswing	Zero
D. Stowed Height	6' 7" (2.01 m)
E. Stowed Length	21' 2" (6.45 m)
F. Wheelbase	6' 7" (2.01 m)
G. Ground Clearance	8" (20 cm)
Weight*	14,400 lb (6,532 kg)**
Ground Bearing Pressure***	110 psi (7.6 kg/cm ²)
Drive Speed	4.5 mph (7.2 km/h)
Gradeability	30%
Turning Radius (inside)	2' (61 cm)
Turning Radius (outside)	10' 4" (3.15 m)
Tire Size/Type	240/55 x 17.5 Foam Filled
Electrical System	48V DC
Batteries	8 x 6V, 370 amp-hr
Drive Motors	Dual Electric Traction AC
Brakes	Spring Applied Multiple Discs
Hydraulic Motor/Pump	Perm. Magnet Motor/Gear Pump
Hydraulic Reservoir	4 gal. (15.14 L)




*Certain options or country standards increase weight.

**For M Models, add 300 lb (136 kg).

***Ground bearing pressure applies to standard tires.

Specifications may change to meet country standards or with addition of optional equipment.

E450AJ

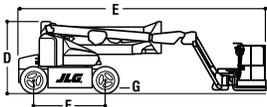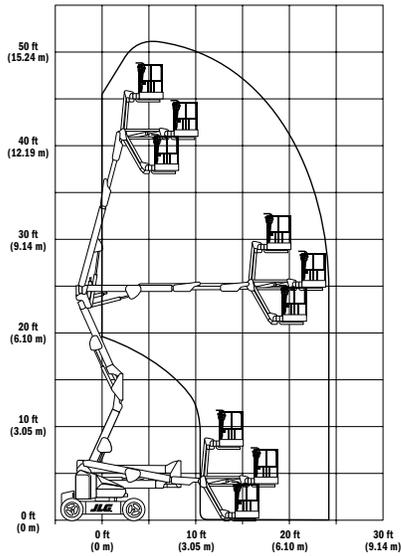

SPECIAL FEATURES INCLUDE:

- ATC (Automatic Traction Control) improves performance on uneven surfaces.
- Jib provides up and over access in confined work areas.
- Brushless AC motors..
- SkyGuard SkyLine™
- Load sensing system

EC600 & H600 Series

Electric & Hybrid Boom Lifts


	EC600SJ/H600SJ	EC600SJP/H600SJP
Platform Height	60' 3" (18.36 m)	60' 4" (18.39 m)
Horizontal Outreach	43' 3" (13.18 m)	44' 5" (13.54 m)
Swing	400° Non-Continuous	400° Non-Continuous
Platform Capacity	500 lb (227 kg)	500 lb (227 kg)
Platform Rotator	180° Hydraulic	180° Hydraulic
Jib (range of articulation)	145° (+75, -70) Vertical	145° (+89, -56) Vertical
(JibPLUS*)	N/A	180° Horizontal
A. Platform Size	30 x 72" (0.76 x 1.83 m)	30 x 72" (0.76 x 1.83 m)
B. Overall Width	7' 11" (2.41 m)	7' 11" (2.41 m)
C. Tailswing	4' (1.22 m)	4' (1.22 m)
D. Stowed Height	8' 4" (2.54 m)	8' 4" (2.54 m)
E. Stowed Length	30' 9" (9.37 m)	33' 4" (10.16 m)
F. Wheelbase	9' (2.74 m)	9' (2.74 m)
G. Ground Clearance		
Axle	12" (30 cm)	12" (30 cm)
Chassis	23" (58 cm)	23" (58 cm)
Weight*	16,710 lb (7,580 kg)	17,210 lb (7,807 kg)
Max. Ground Bearing Pressure**	52 psi (3.7 kg/cm ²)	51 psi (3.6 kg/cm ²)
Drive Speed	3.0 mph (4.8 km/h)	3.0 mph (4.8 km/h)
Gradeability 2WD/AWD	30%/45%	30%/45%
Turning Radius (inside)	4' (1.22 m)	4' (1.22 m)
Turning Radius (outside)	15' 4" (4.67 m)	15' 4" (4.67 m)
Axle Oscillation	8" (20 cm)	8" (20 cm)
Tire Size/Type	36 x 14-22.5 Non-Marking Foam Filled	36 x 14-22.5 Non-Marking Foam Filled
Electrical System	48V DC	48V DC
Batteries	8 x 6V, 415 amp-hr	8 x 6V, 415 amp-hr
Drive Motors	Dual Electric Traction	Dual Electric Traction
Brakes	Spring Applied Multiple Discs	Spring Applied Multiple Discs
Hydraulic Motor/Pump	Series Wound Motor/Gear Pump	Series Wound Motor/Gear Pump
Hydraulic Reservoir	15 gal. (56.78 L)	15 gal. (56.78 L)
Generator Set (H Models)	45 Amp Kubota 6.7 hp Diesel Engine	45 Amp Kubota 6.7 hp Diesel Engine
Engine Fuel Tank (H Models)	13 gal. (49.21 L)	13 gal. (49.21 L)

*Certain options or country standards increase weight.


**Ground bearing pressure applies to standard tires.

Specifications may change to meet country standards or with addition of optional equipment.

EC/H600SJ

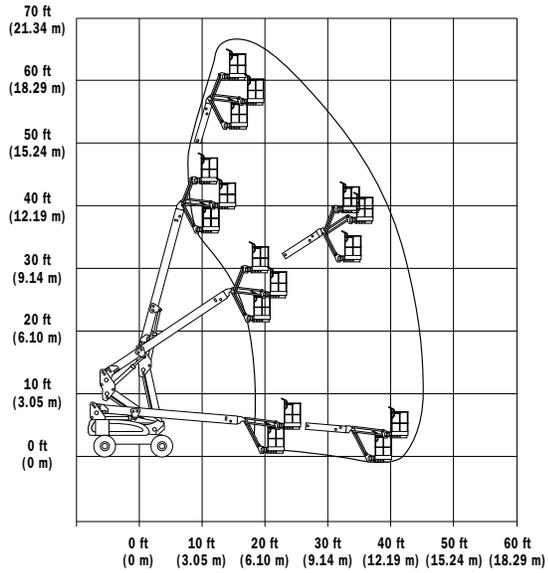

EC/H600SJP

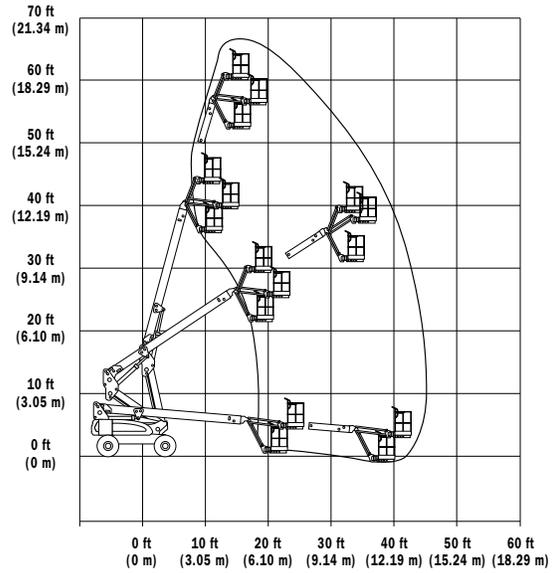

SPECIAL FEATURES INCLUDE:

- The world's first 60-foot Electric Boom— indoor and outdoor versatility.
- Indoor advantages— Zero emissions, industry-leading noise reduction, non-marking tires and the lowest weight in its class.
- Outdoor advantages— Rugged design with available all-wheel drive, automatic traction control and oscillating axle.
- SkyGuard SkyLine™
- Load sensing system

H340AJ

Electric & Hybrid Boom Lifts

H340AJ

Platform Height	33' 10.5" (10.33 m)
Horizontal Outreach	19' 11" (6.06 m)
Up and Over Height	17' (5.17 m)
Swing	355° Non-Continuous
Platform Capacity	500 lb (227 kg)
Platform Rotator	180° Hydraulic
Jib (range of articulation)	4' (1.22 m) 139° (+79, -60)
A. Platform Size	30 x 60" (0.76 x 1.22 m)
B. Overall Width	6' 4" (1.93 m)
C. Tailswing	2" (5.08 cm)
D. Stowed Height	6' 7" (2 m)
E. Stowed Length	18' 2" (5.52 m), 13' (3.98 m) with Jib Stowed
F. Wheelbase	6' 2" (1.87 m)
G. Ground Clearance	10" (23.7 cm)
Weight*	9,860 lb (4,472 kg)
Max. Ground Bearing Pressure**	64 psi (4.5 kg/cm ²)
Drive Speed 4WD	3.7 mph (5.95 km/h)
Gradeability 4WD	45%
Turning Radius (inside)	5' (1.52 m)
Turning Radius (outside)	13' (3.96 m)
Axle Oscillation	6" (15.2 cm)
Tire Size/Type	265/50 D20 Foam Filled Lug Tread
Diesel Engine	Kubota Z482 11.1 hp (8.3 kW)
Batteries	8 x 12V 100 amp-hr AGM
Hydraulic Reservoir	20.6 gal. (77.9 L)
Fuel Tank Capacity	13 gal. (49.2 L)
Auxiliary Power	12V DC



*Certain options or country standards increase weight.

**Ground bearing pressure applies to standard tires.

* Standard with glow plugs.

Specifications may change to meet country standards or with addition of optional equipment.

H340AJ

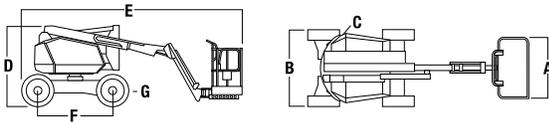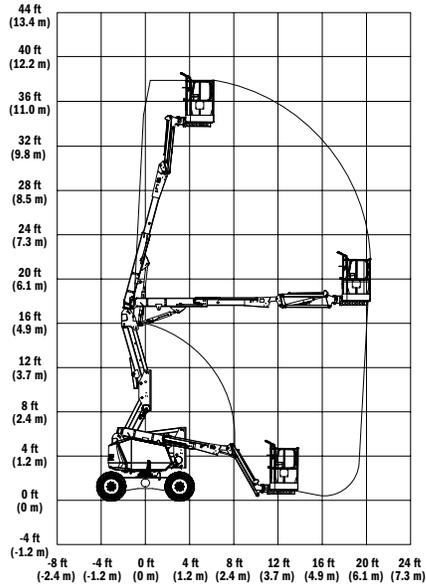

SPECIAL FEATURES INCLUDE:

- Indoor and outdoor use—
Less noise and lower emissions give access to job sites where traditional diesel machines are not allowed to operate.
- Power and performance—
Four individually controlled drive motors provide four-wheel drive and exceptional terrainability on par with its diesel counterpart.
- Reduced maintenance—
Direct AC electric drive reduces the number of hydraulic hoses and fittings as well as the potential for leaks by 40% over hydraulic-powered counterparts.
- SkyGuard SkyLine™
- Load sensing system

H800AJ

Electric & Hybrid Boom Lifts

H800AJ

Platform Height	80' (24.38 m)
Horizontal Outreach	51' 10" (15.8 m)
Up and Over Height	32' 1" (9.78 m)
Swing	360° Continuous
Platform Capacity	500 lb (227 kg)
Platform Rotator	180° Hydraulic
A. Platform Size	36 x 96" (0.91 x 2.44 m)
B. Overall Width	8' 2" (2.48 m)
C. Tailswing	3' 6" (1.06 m)
D. Stowed Height	9' 10" (3.0 m)
E. Stowed Length	36' 6" (11.13 m)
F. Wheelbase	10' (3.05 m)
G. Ground Clearance	11" (0.28 m)
Weight [†]	35,520 lb (16,110 kg)
Max. Ground Bearing Pressure ^{**}	76 psi (5.3 kg/cm ²)
Drive Speed 4WD	3.45 mph (5.55 km/h)
Gradeability 4WD	45%
Turning Radius Inside/Outside	12'6"/19'8" (3.8/6.02 m)
Axle Oscillation	8" (20.4 cm)
Diesel Engine	Kubota Tier 4 Final 25 hp (18.6 kW)
Motor/Generator Power	28 hp 20.9 kW
Batteries	12V, 235 amp-hr 4D, AGM Maintenance Free
Hydraulic Reservoir	21 gal. (79.5 L)
Fuel Tank Capacity	25 gal. (94.64 L)
Tires	15-625 Foam Filled



[†]Certain options or country standards increase weight.

^{**}Ground bearing pressure applies to standard tires.

[†]Standard with glow plugs.

Specifications may change to meet country standards or with addition of optional equipment.

H800AJ

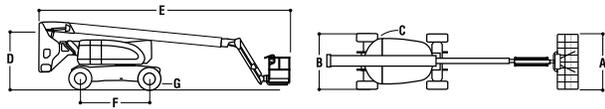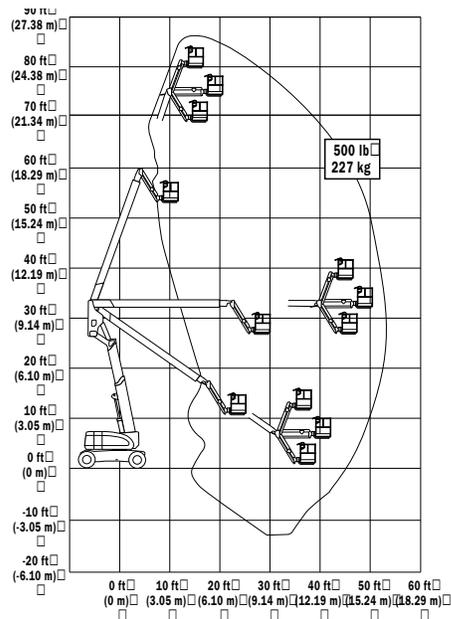

SPECIAL FEATURES INCLUDE:

- Same 800AJ with efficient hybrid power— Core components like the drivetrain, weldments and hydraulics are the same, helping to improve total cost of ownership with common parts, service and reduced training needs.
- Built on 20 years of experience— JLG is expanding the hybrid family as we celebrate two decades of experience in this product category.
- Economic performance— Provides diesel performance with better fuel economy or can be operated on electric only power.
- Load sensing system

340AJ & 450 Series Articulating Boom Lifts

	340AJ	450A	450AJ
Platform Height	33' 10.5" (10.33 m)	45' (13.72 m)	45' (13.72 m)
Horizontal Outreach	19' 11" (6.06 m)	30' (9.14 m)	25' (7.62 m)
Up and Over Height	17' (5.17 m)	20' 8" (6.09 m)	24' (7.3 m)
Swing	355° Non-Continuous	355° Non-Continuous	355° Non-Continuous
Platform Capacity	500 lb (227 kg)	550 lb (250 kg)	550 lb (250 kg)
Platform Rotator	180° Hydraulic	180° Hydraulic	180° Hydraulic
Jib (range of articulation)	4' (1.22 m) 139° (+79, -60)	—	4' 1" (1.24 m), 145° (+76, -69)
A. Platform Size	30 x 60" (0.76 x 1.52 m)	30 x 72" (0.76 x 1.83 m)	30 x 72" (0.76 x 1.83 m)
B. Overall Width	6' 4" (1.93 m)	7' 8" (2.34 m)	7' 8.6" (2.35 m)
C. Tailswing	2" (5.08 cm)	Zero	Zero
D. Stowed Height	6' 7" (2 m)	7' 4.8" (2.25 m)	7' 5.3" (2.27 m)
E. Stowed Length	18' 2" (5.52 m), 13' 2" (4.02 m) with Jib Stowed	25' 2" (7.68 m)	21' 6.9" (6.57 m)
F. Wheelbase	6' 2" (1.87 m)	7' 8" (2.34 m)	7' 9" (2.36 m)
G. Ground Clearance	10" (23.7 cm)	11.5" (29 cm)	16.4" (41.7 cm)
Weight*	9,700 lb (4,400 kg)	15,850 lb (7,190 kg)	14,150 lb (6,418 kg)
Max. Ground Bearing Pressure**	64 psi (4.5 kg/cm ²)	65 psi (4.57 kg/cm ²)	65 psi (4.57 kg/cm ²)
Drive Speed	3.1 mph (4.98 km/h)	4.25 mph (6.84 km/h)	4.25 mph (6.84 km/h)
Tilt Cut-Out	3°	5°	5°
Gradeability	45%	45% (2WD-30%)	45% (2WD-30%)
Turning Radius (inside)	5' (1.52 m)	6' 9" (2.06 m)	6' 9" (2.06 m)
Turning Radius (outside)	13' (3.96 m)	15' 8" (4.78 m)	15' 8" (4.78 m)
Axle Oscillation	6" (15.2 cm)	4" (10 cm)	4" (10 cm)
Tire Size/Type	265/50 D20 Foam Filled Lug Tread	33/1550 x 16.5 Foam Filled Lug Tread	33/1550 x 16.5 Foam Filled Lug Tread
Dual Fuel Engine	PSI/GM L4 EFI 28.7 hp (21.4 kW)	Kubota DF WG2503 61 hp (45.5 kW)	Kubota DF WG2503 61 hp (45.5 kW)
Diesel Engine	Kubota D1105 24.8 hp (18.5 kW)	Deutz D2.9L4 Tier 4 Final 49 hp (36.4 kW)	Deutz D2.9L4 Tier 4 Final 49 hp (36.4 kW)
Fuel Tank Capacity	13 gal. (49.21 L)	16 gal. (60.6 L)	16 gal. (60.6 L)
Hydraulic Reservoir	20.6 gal. (77.9 L)	32 gal. (121 L)	32 gal. (121 L)
Auxiliary Power	12V DC	12V DC	12V DC




*Certain options or country standards increase weight.

**Ground bearing pressure applies to standard tires.

† Standard with glow plugs.

Specifications may change to meet country standards or with addition of optional equipment.




340AJ

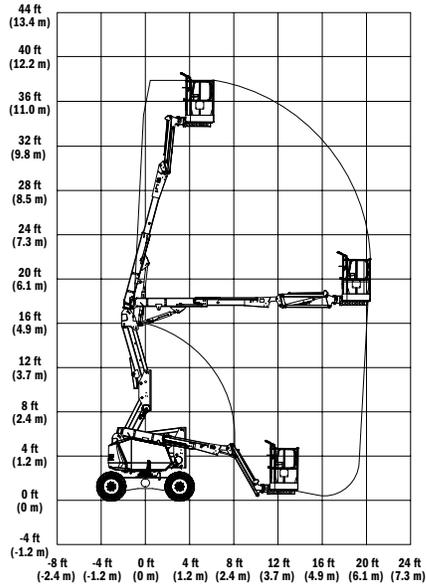




SPECIAL FEATURES INCLUDE:

- Lighter weight for more efficient performance over a wide range of applications and reduced transport costs.
- Increased work envelope with optimum up and over clearance and horizontal outreach.
- Improved rough terrain capabilities with standard 4-wheel drive, oscillating axle and 45% gradeability.
- Enhanced electrical and hydraulic systems minimize wiring and hoses, reducing wear and maintenance.
- SkyGuard SkyLine™
- Load sensing system

450A

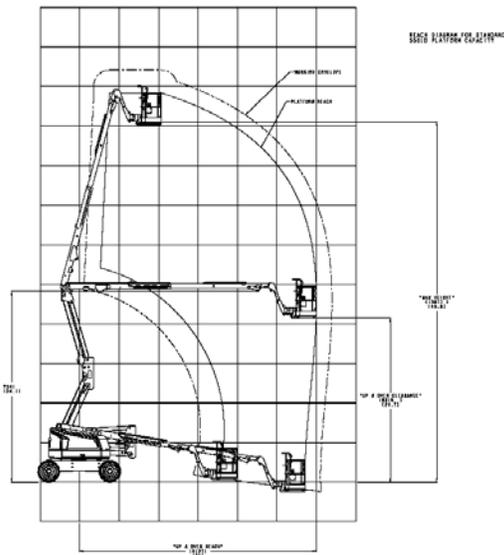

450AJ

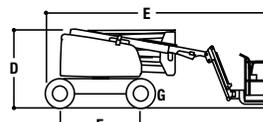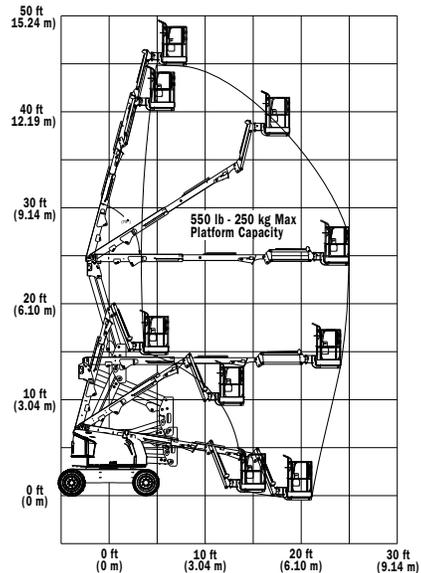

600 Series

Articulating Boom Lifts



	600AJ	600AJ Narrow
Platform Height	60' 7" (18.47 m)	60' 7" (18.47 m)
Horizontal Outreach	39' 9" (12.1 m)	39' 9" (12.1 m)
Up and Over Height	26' 7" (8.1 m)	26' 7" (8.1 m)
Swing	360° Continuous	360° Continuous
Platform Capacity-Restricted	500 lb (227 kg)	500 lb (227 kg)
Platform Capacity-Unrestricted	500 lb (227 kg)	500 lb (227 kg)
Platform Rotator	180° Hydraulic	180° Hydraulic
Jib (range of articulation)	130° (+70, -60)	130° (+70, -60)
A. Platform Size	36 x 96" (0.91 x 2.44 m)	36 x 96" (0.91 x 2.44 m)
B. Overall Width	8' 2" (2.48 m)	7' (2.13 m)
C. Tailswing	Zero	5" (13 cm)
D. Stowed Height	8' 4" (2.54 m)	8' 4" (2.54 m)
E. Stowed Length	28' 11.5" (8.83 m)	28' 11.5" (8.83 m)
F. Wheelbase	8' (2.44 m)	8' (2.44 m)
G. Ground Clearance	12" (30 cm)	12" (30 cm)
Weight*	22,691 lb (10,292 kg)	24,200 lb (10,977 kg)
Max. Ground Bearing Pressure**	75 psi (5.25 kg/cm ²)	94 psi (6.6 kg/cm ²)
Drive Speed 2WD	4.25 mph (6.8 km/h)	4.25 mph (6.8 km/h)
Drive Speed 4WD	4.25 mph (6.8 km/h)	N/A
Tilt Cut-Out	4°	4°
Gradeability 2WD	30%	30%
Gradeability 4WD	45%	N/A
Turning Radius (inside)		
2WS	10' 11" (3.33 m)	N/A
4WS	5' 6" (1.68 m)	5' 7" (1.7 m)
Turning Radius (outside)		
2WS	17' 8" (5.38 m)	N/A
4WS	11' 8" (3.56 m)	11' 2" (3.4 m)
Axle Oscillation	8" (20 cm)	8" (20 cm)
Tire Size/Type	IN355/55D-6.25 Low Profile/Foam Filled	36 x 14-20 Solid
Dual Fuel Engine (Ford MSG425-DF)	84 hp (62 kW)	84 hp (62 kW)
Diesel Engine (Deutz D2.9L4 Tier 4 Final)	48.8 hp (36.4 kW)	48.8 hp (36.4 kW)
Fuel Tank Capacity	30 gal. (113.56 L)	30 gal. (113.56 L)
Hydraulic Reservoir	30.6 gal. (115.83 L)	30.6 gal. (115.83 L)
Auxiliary Power	12V DC	12V DC

*Certain options or country standards increase weight.

**Ground bearing pressure apply to standard tires.

Specifications may change to meet country standards or with addition of optional equipment.

600AJ

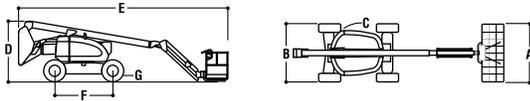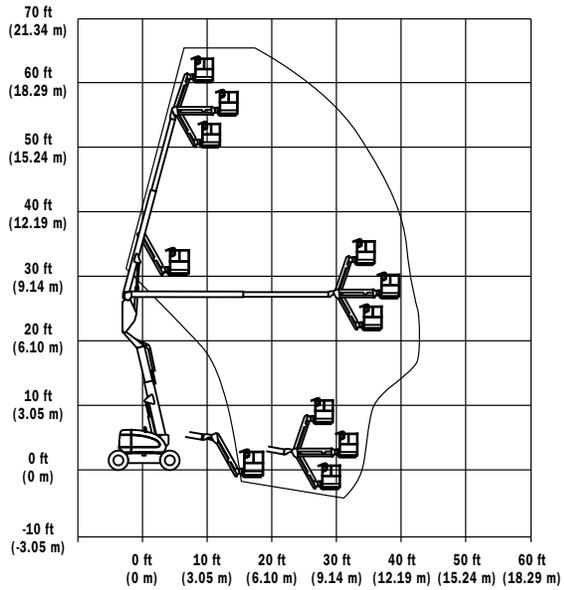

SPECIAL FEATURES INCLUDE:

- Platform controls with one-hand control of lift and swing.
- Advanced boom design provides optimal reach envelope with zero tailswing.
- Easier access swing-out engine tray.
- Oscillating axle and 4-wheel drive for superior traction.
- Revolutionary WorkStation in the Sky® options and accessories.
- SkyGuard SkyLine™
- Load sensing system

800AJ Articulating Boom Lifts

800AJ



Platform Height	80' (24.38 m)
Horizontal Outreach	51' 10" (15.8 m)
Up and Over Height	32' 1" (9.78 m)
Swing	360° Continuous
Platform Capacity-Restricted	N/A
Platform Capacity-Unrestricted	500 lb (227 kg)
Platform Rotator	180° Hydraulic
Jib (range of articulation)	6' (1.83 m), 130° (+70, -60)
A. Platform Size	36 x 96" (0.91 x 2.44 m)
B. Overall Width	8' 2" (2.48 m)
C. Tailswing	2' 6" (76 cm)
D. Stowed Height	9' 10" (3.0 m)
E. Stowed Length	36' 6" (11.13 m)
F. Wheelbase	10' (3.05 m)
G. Ground Clearance	11" (28 cm)
Weight*	34,738 lb (15,757 kg)
Max. Ground Bearing Pressure**	76 psi (5.3 kg/cm ²)
Drive Speed 2WD or 4WD	3.0 mph (4.8 km/h)
Tilt Cut-Out	4°
Gradeability 2WD	30%
Gradeability 4WD	45%
Turning Radius (inside)	
2WS	12' 6" (3.8 m)
4WS	6' (1.83 m)
Turning Radius (outside)	
2WS	19' 8" (6.02 m)
4WS	11' 7" (3.53 m)
Tire Size/Type (4WD)	15-625 Foam Filled Lug Tread
Dual Fuel Engine	Ford MSG425-DF 84 hp (62.6 kW)
Diesel Engine	Deutz TD2.9L4 Tier 4 Final 67 hp (50 kW)
Fuel Tank Capacity	39 gal. (147.63 L)
Hydraulic Reservoir	40 gal. (151.42 L)
Auxiliary Power	12V DC

*Certain options or country standards increase weight.

**Ground bearing pressure applies to standard tires.

Specifications may change to meet country standards or with addition of optional equipment.

800AJ

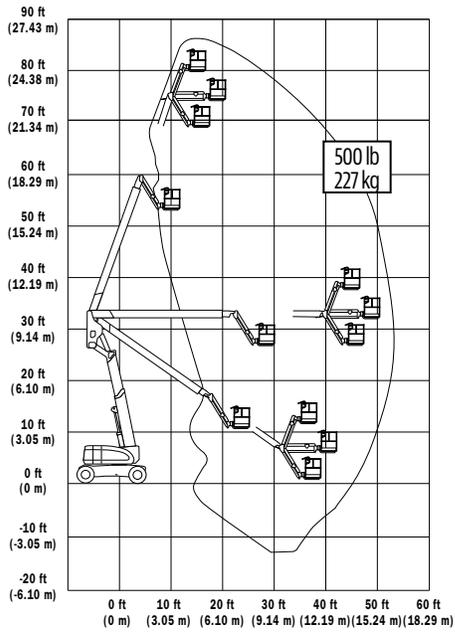

SPECIAL FEATURES INCLUDE:

- Exclusive QuikStik® boom — 50 seconds from ground to full elevation.
- Optional oscillating axle and 4-wheel drive for superior traction.
- Narrow 8 ft 2 in. (2.48 m) chassis for improved access.
- Revolutionary new WorkStation in the Sky® options and accessories.
- SkyGuard SkyLine™
- Load sensing system

Ultra Series Articulating Boom Lifts

	1250AJP	1500AJP
Platform Height	125' 8" (38.3 m)	150' (45.72 m)
Horizontal Reach	63' 2" (19.25 m)	75' (22.86 m)
Up and Over Height	60' 6" (18.44 m)	60' 4" (18.4 m)
Swing	360° Continuous	360° Continuous
Platform Capacity—Restricted	1,000 lb (454 kg)	1,000 lb (454 kg)
Platform Capacity—Unrestricted	500 lb (227 kg)	600 lb (272 kg)
Platform Rotator	180°	180° Hydraulic
JibPLUS*		
Length	8' (2.44 m)	8' (2.4 m)
Horizontal Motion	125°	125°
Vertical Motion ²	130° (+75, -55)	130° (+75, -55)
A. Platform Size	36" x 96" (0.91 x 2.44 m)	36 x 96" (.91 x 2.44 m)
B. Overall Width—Axles Retracted	8' 2" (2.49 m)	8' 1.5" (2.5 m)
Overall Width—Axles Extended	12' 6" (3.81 m)	16' 6" (5 m)
C. Tailswing	3' (91 cm)	0
D. Stowed Height	9' 11" (3.02 m)	10' 2" (3.1 m)
E. Stowed Length (shipment)	37' 7" (11.45 m)	39' 8" (12.09 m)
F. Stowed Length (drive)	47' 6" (14.48 m)	49' 8" (15.1 m)
G. Wheelbase	12' 6" (3.81 m)	15' (4.6m) extended 17' 1.50" (5.22 m) retracted
H. Ground Clearance		
Axle	12" (3 m)	15" (4 m)
Chassis	25.5" (65 cm)	15.75" (40 cm)
Weight ¹	44,000 lb (19,958 kg)	57,380 lb (26,027 kg)
Max Ground Bearing Pressure ²	100 psi (7.03 kg/cm ²)	120 psi (83.7 kg/cm ²)
Drive Speed	3.25 mph (5.2 km/h)	2.8 mph (4.5 km/h)
Tilt Cut-Out	5°	5°
Gradeability	45%	40%
Turning Radius (inside)		
Axles Retracted	14' 5" (4.39 m)	23' 4" (7.11 m)
Axles Extended	8' (2.44 m)	7' 6" (2.28 m)
Turning Radius (outside)		
Axles Retracted	22' 6" (6.86 m)	31' 3" (9.52 m)
Axles Extended	19' 4" (5.89 m)	21' 8" (6.6 m)
Crab Steer Ratio ³	1:1	1:1
Axle Oscillation	8" (20 cm)	N/A
Tire Size/Type	445/50D710 Foam Filled	445/50D710 Foam Filled
Diesel Engine	Deutz TCD2.9L4 74.2 hp (55.4 kW) Tier 4 Final	Deutz TCD 3.6L 99.8 hp (74.45 kW)
Fuel Tank Capacity	31 gal. (117.35 L)	45 gal. (170 L)
Hydraulic Reservoir	53 gal. (200.63 L)	93 gal. (352 L)
Auxiliary Power	12V DC	12V DC

*Ground bearing pressure applies to standard tires.


1. Certain options or country standards increase weight.

2. Capacity is limited to 500 lb when JibPLUS® is swung off-center (600 lb on 1500AJP).


3. Ratio of forward travel to lateral travel.

Specifications may change to meet country standards or with addition of optional equipment.

1250AJP

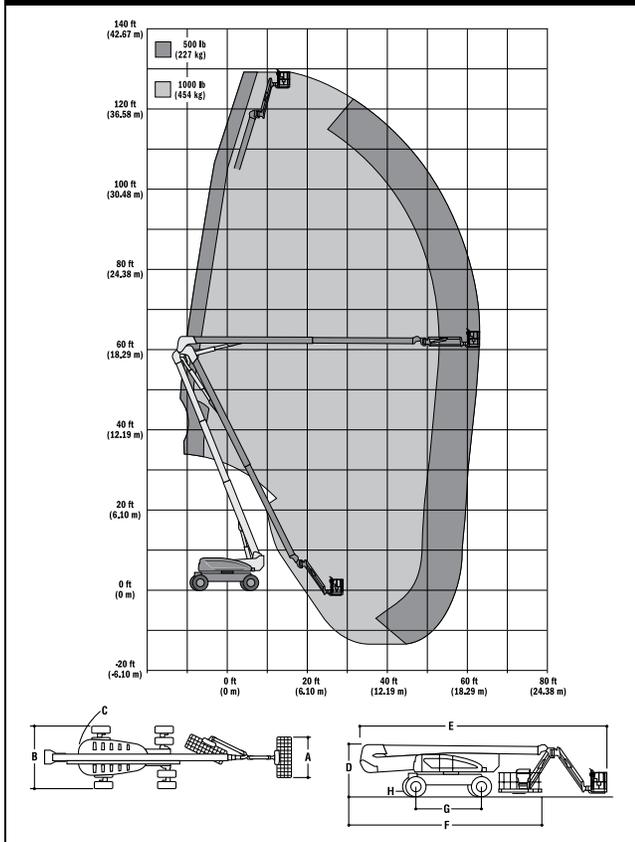

1500AJP

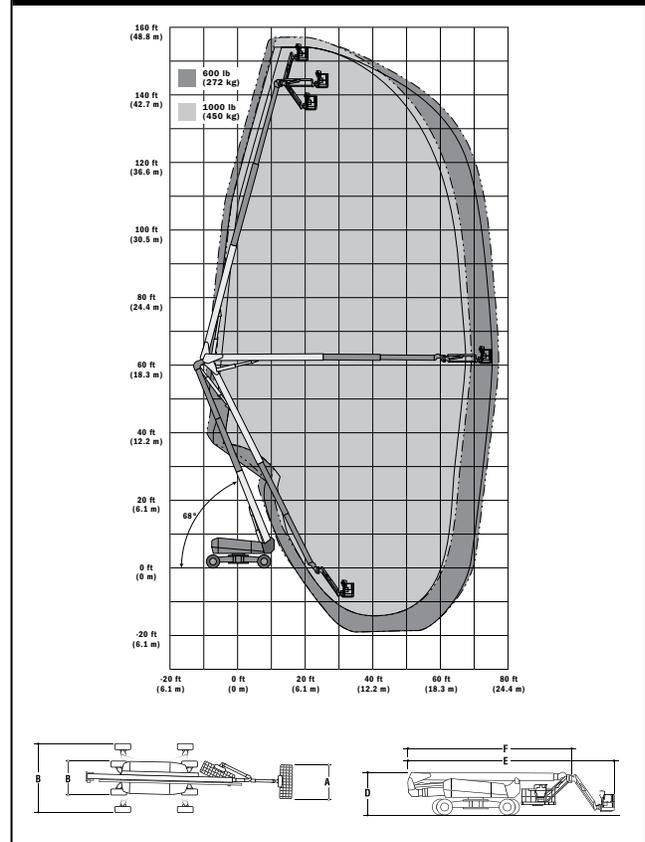

SPECIAL FEATURES INCLUDE:

- Huge Work Envelope — up to 2.6 million cubic foot work envelope means you can access otherwise inaccessible areas.
- Best Mobility in Class — Tightest turning radius, best crab-steer ratio, drive-out extendable axles and the only oscillating axle (1250AJP only) in its class means you can take these big boom lifts where no others can go.
- Revolutionary new WorkStation in the Sky® options and accessories.
- Exclusive QuikStik® Boom — 115 seconds from full elevation to ground (180 seconds for the 1500AJP). 100,000 psi steel in the boom helps you get more work done with higher platform capacities and built-in power tools.
- SkyGuard SkyLine™
- Load sensing system

400 Series Telescopic Boom Lifts



	400S	400S HC3	460SJ	460SJ HC3
Platform Height	40' (12.19 m)	40' (12.19 m)	46' (14.05 m)	46' (14.05 m)
Horizontal Outreach	33' 6" (10.23 m)	33' 6" (10.23 m)	39' (12 m)	39' (12 m)
Swing	360° Continuous	360° Continuous	360° Continuous	360° Continuous
Platform Capacity—Restricted	1,000 lb (454 kg)	750/1,000 lb (340/454 kg)	N/A	750/1,000 lb (340/454 kg)
Platform Capacity—Unrestricted	600 lb (272 kg)	660 lb (300 kg)	600 lb (272 kg)	660 lb (300 kg)
Platform Rotator	180° Hydraulic	180° Hydraulic	180° Hydraulic	180° Hydraulic
Lift/Lower Speed	34/34 seconds	34/34 seconds	34/34 seconds	34/34 seconds
Jib (Range of Articulation)	N/A	N/A	6' (1.83 m), 130° (+70, -60)	6' (1.83 m), 130° (+70, -60)
A. Platform Size	36 x 96" (0.91 x 2.44 m)			
B. Overall Width	7' 6.8" (2.31 m)			
C. Tailswing	2' 10" (86 cm)			
D. Stowed Height	8' 1" (2.47 m)			
E. Stowed Length	24' 11" (7.6 m)	24' 11" (7.6 m)	29' 3" (8.91 m)	29' 3" (8.91 m)
F. Wheelbase	7' 9.5" (2.37 m)			
G. Ground Clearance	12" (0.3 m)	12" (0.3 m)	12" (0.3 m)	12" (0.3 m)
Weight*	14,520 lb (6,586 kg)	15,040 lb (6,822 kg)	16,600 lb (7,530 kg)	19,260 lb (8,736 kg)
Ground Bearing Pressure**	58 psi (4.00 kg/cm ²)	65 psi (4.57 kg/cm ²)	69 psi (4.76 kg/cm ²)	99 psi (6.96 kg/cm ²)
Drive Speed	4.25 mph (6.8 km/h)			
Tilt Cut-Out	5°	5°	5°	5°
Gradeability	45% (2WD-30%)	45% (2WD-30%)	45% (2WD-30%)	45% (2WD-30%)
Turning Radius (inside)	6' 5" (2.0 m)	6' 5" (2.0 m)	6' 6.9" (2.0 m)	6' 6.9" (2.0 m)
Turning Radius (outside)	15' 8" (4.8 m)	15' 8" (4.8 m)	15' 10.5" (4.8 m)	15' 10.5" (4.8 m)
Tire Size/Type	12 x 16.5 Foam Filled Lug Tread	33 X 12 Foam Filled	12 x 16.5 Foam Filled Lug Tread	33 X 12 Foam Filled
Dual Fuel Engine	Kubota DF WG2503 61 hp (45.5 kW)			
Diesel Engine	Deutz D2.9L4 Tier 4 Final 49 hp (36.4 kW)	Deutz D2.9L4 Tier 4 Final 49 hp (36.4 kW)	Deutz D2.9L4 Tier 4 Final 49 hp (36.4 kW)	Deutz D2.9L4 Tier 4 Final 49 hp (36.4 kW)
Fuel Tank Capacity	22 gal. (83.3 L)			
Hydraulic Reservoir	36 gal. (136 L)			
Auxiliary Power	12V DC	12V DC	12V DC	12V DC

*Certain options or country standards increase weight.



**Ground bearing pressure applies to standard tires.

Specifications may change to meet country standards or with addition of optional equipment.



SPECIAL FEATURES INCLUDE:

- 45% gradeability (2WD-30%).
- 100% more platform capacity than most competitors.
- Revolutionary WorkStation in the Sky® options and accessories.
- Up to 39 ft (12 m) horizontal reach.
- SkyGuard SkyLine™
- Load sensing system



400S

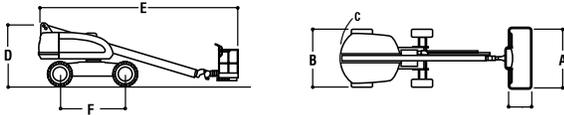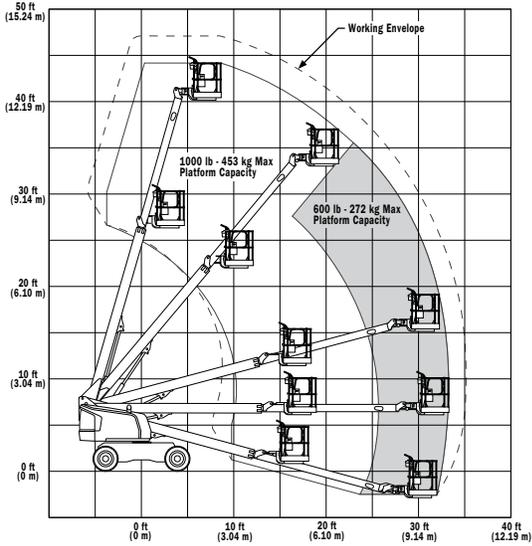



460SJ

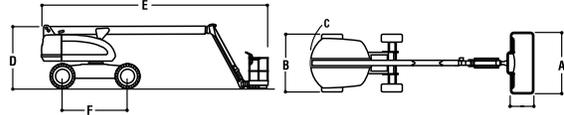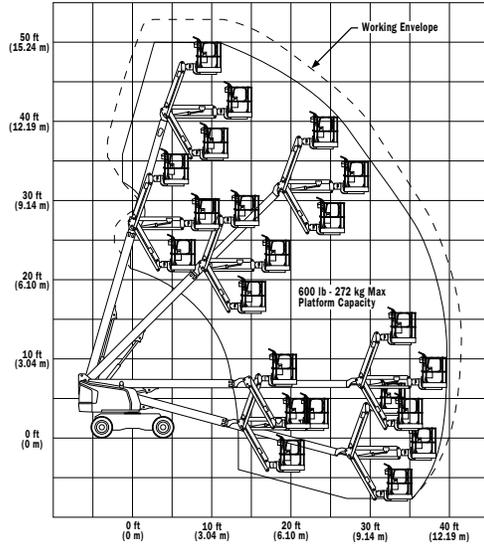

400S HC3

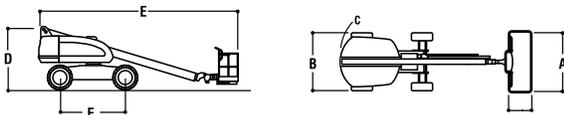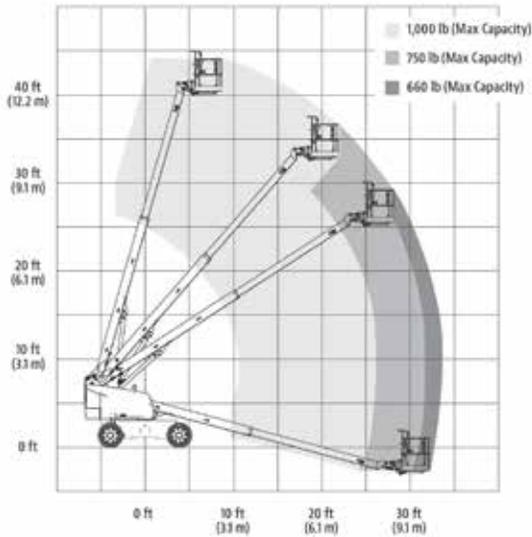

460SJ HC3

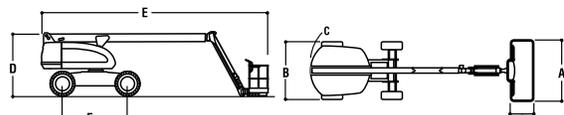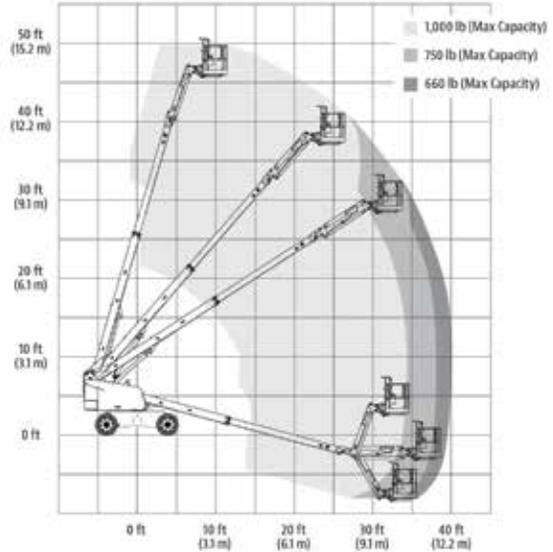

400 Crawler Series Telescopic Boom Lifts



	400SC	460SJC
Platform Height	39' 6.5" (12.05 m)	45' 5.4" (13.88 m)
Horizontal Outreach	33' (10.00 m)	39' (12.00 m)
Swing	360° Continuous	360° Continuous
Platform Capacity—Restricted	1,000 lb (454 kg)	N/A
Platform Capacity—Unrestricted	600 lb (272 kg)	600 lb (272 kg)
Platform Rotator	180° Hydraulic	180° Hydraulic
Jib (range of articulation)	N/A	6' (1.83 m), 130° (+70, -60)
A. Platform Size	36 x 96" (0.91 x 2.44 m)	36 x 96" (0.91 x 2.44 m)
B. Overall Width	7' 4" (2.23 m)	7' 4" (2.23 m)
C. Tailswing	3.14' (0.96 m)	3.14' (0.96 m)
D. Stowed Height	7' 7.5" (2.32 m)	7' 7.2" (2.33 m)
E. Stowed Length	24' 10" (7.57 m)	29' 3" (8.9 m)
F. Ground Clearance	16" (0.41 m)	16" (0.41 m)
Weight*	14,559 lb (6,603 kg)	17,998 lb (8,164 kg)
Max. Ground Bearing Pressure	5.21 psi (366 kg/cm ²)	8.35 psi (587 kg/cm ²)
Drive Speed	1.6 mph (2.57 km/h)	1.8 mph (2.9 km/h)
Gradeability	51%	51%
Turning Radius	Zero	Zero
Type of Tracks**	Rubber	Rubber
Track Width	1.31' (0.4 m)	1.31' (0.4 m)
Diesel Engine	Deutz D2.9L4 Tier 4 Final 49 hp (36.4 kW)	Deutz D2.9L4 Tier 4 Final 49 hp (36.4 kW)
Fuel Tank Capacity	22 gal. (83.3 L)	31 gal. (117 L)
Hydraulic Reservoir	36 gal. (136.27 L)	36 gal. (136.27 L)
Auxiliary Power	12V DC	12V DC

*Certain options or country standards increase weight.



**Optional non-marking rubber and steel tracks available.

Specifications may change to meet country standards or with addition of optional equipment.

400SC

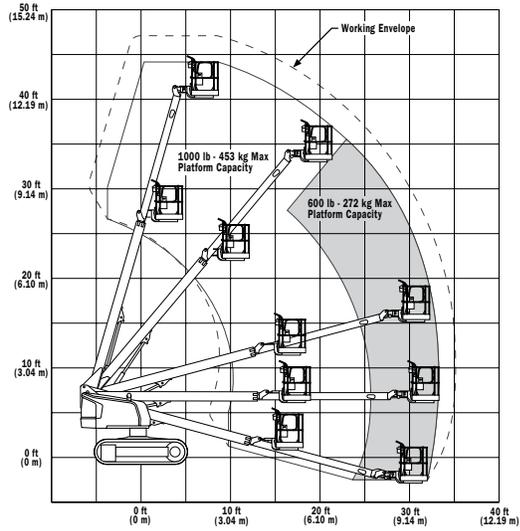

460SJC

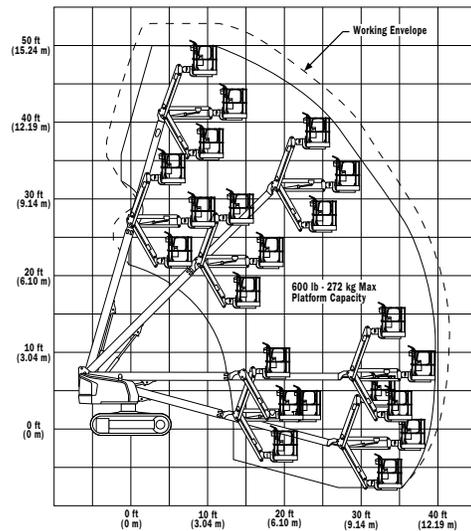

SPECIAL FEATURES INCLUDE:

- Better mobility with a zero turning radius.
- Increased flotation with a choice of tracks.
- Easier control with a unique single-joystick control.
- 1,000 lb (454 kg) dual capacity (400SC).
- Articulating Jib provides reach versatility.
- SkyGuard SkyLine™
- Load sensing system

600 Series Telescopic Boom Lifts



	600S	600S HC3	660SJ	660SJ HC3
Platform Height	59' 8" (18.18 m)	59' 8" (18.18 m)	65' 8" (20.02 m)	65' 8" (20.02 m)
Horizontal Outreach	50' 2" (15.29 m)	50' 2" (15.29 m)	57' 1" (17.40 m)	57' 1" (17.40 m)
Swing	360° Continuous	360° Continuous	360° Continuous	360° Continuous
Platform Capacity—Restricted	1,000 lb (454 kg)	750/1,000 lb (340/454 kg)	750 lb (340 kg)	750/1,000 lb (340/454 kg)
Platform Capacity—Unrestricted	600 lb (272 kg)	660 lb (300 kg)	550 lb (250 kg)	660 lb (300 kg)
Platform Rotator	160° Hydraulic	160° Hydraulic	180° Hydraulic	180° Hydraulic
Jib (range of articulation)	N/A	N/A	6' (1.83 m), 132° (+71, -61)	6' (1.83 m), 132° (+71, -61)
A. Platform Size	36 x 96" (0.91 x 2.44 m)			
B. Overall Width	8' 2" (2.48 m)			
C. Tailswing	4' (1.22 m)	4' (1.22 m)	4' (1.22 m)	4' (1.22 m)
D. Stowed Height	8' 2.4" (2.50 m)			
E. Stowed Length	28' 7" (8.71 m)	28' 7" (8.71 m)	35' 4.7" (10.79 m)	35' 4.7" (10.79 m)
F. Wheelbase	8' 2.7" (2.51 m)			
G. Ground Clearance (axle)	11.3" (0.29 m)	11.3" (0.29 m)	11.3" (0.29 m)	11.3" (0.29 m)
Weight*	21,647 lb (9,819 kg)	22,900 lb (10,387 kg)	25,341 lb (11,494 kg)	29,281 lb (13,281 kg)
Max. Ground Bearing Pressure**	83 psi (5.84 kg/cm ²)	88 psi (6.19 kg/cm ²)	86 psi (6 kg/cm ²)	110 psi (7.75 kg/cm ²)
Drive Speed 4WD	3.8 mph (6.3 km/h)			
Tilt Cut-Out	5°	5°	5°	5°
Gradeability 4WD	45%	45%	45%	45%
Turning Radius (inside) 2WS	9' 7" (2.92 m)			
Turning Radius (inside) 4WS	5' 3" (1.61 m)	N/A	5' 3" (1.61 m)	N/A
Turning Radius (outside) 2WS	19' 7" (5.96 m)			
Turning Radius (outside) 4WS	12' 8" (3.87 m)	N/A	12' 8" (3.87 m)	N/A
Axle Oscillation	8" (0.2 m)	8" (0.2 m)	8" (0.2 m)	8" (0.2 m)
Tire Size/Type	355/55D625 Foam Filled Lug Tread			
Dual Fuel Engine	Ford MSG425-DF 84 hp (62.6 kW)			
Diesel Engine	Deutz D2.9L4 48.8 hp (36.4 kW) Tier 4 Final	Deutz D2.9L4 48.8 hp (36.4 kW) Tier 4 Final	Deutz D2.9L4 48.8 hp (36.4 kW) Tier 4 Final	Deutz D2.9L4 48.8 hp (36.4 kW) Tier 4 Final
Fuel Tank Capacity	31 gal. (117 L)			
Hydraulic Reservoir	34 gal. (129 L)			
Auxiliary Power	12V DC	12V DC	12V DC	12V DC

*Certain options or country standards increase weight.



**Ground bearing pressure applies to standard tires.

Specifications may change to meet country standards or with addition of optional equipment.



SPECIAL FEATURES INCLUDE:

- The best selling series of boom lifts in the world.
- Powerful configurations —
Choose from 12 models with various jibs, tracks and power options.
- Easy-to-identify platform controls for reduced operator training time.
- New and improved articulating jibs permit greater reach versatility.
- Revolutionary WorkStation in the Sky® options and accessories.
- SkyGuard SkyLine™
- Load sensing system



600S

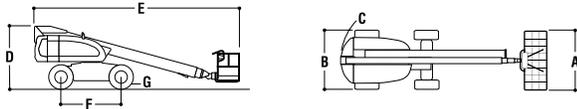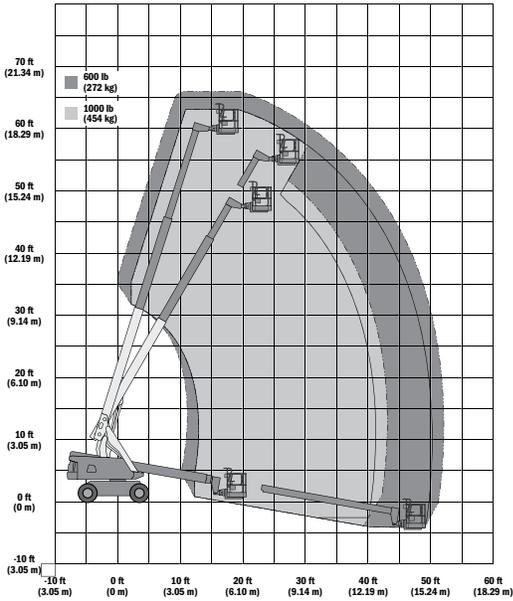



660SJ

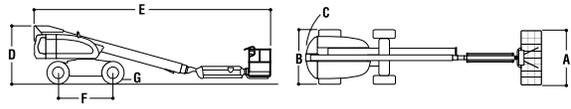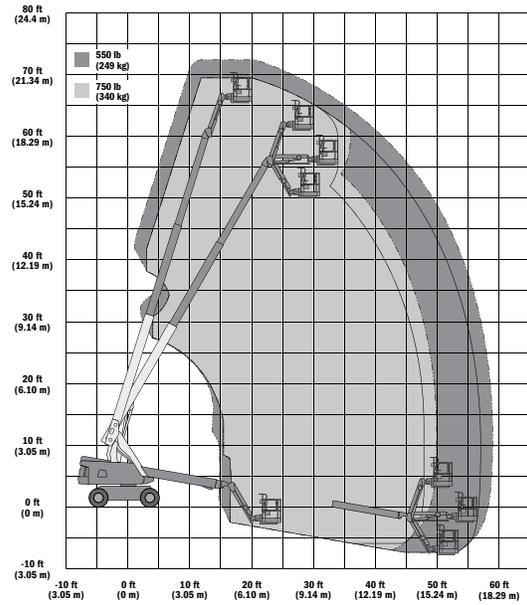

600S HC3

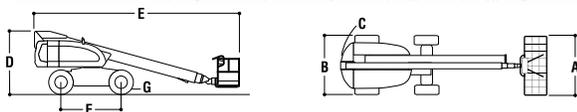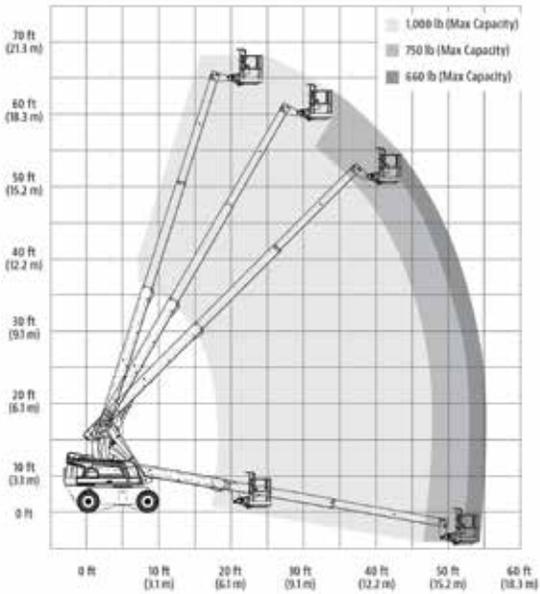

660SJ HC3

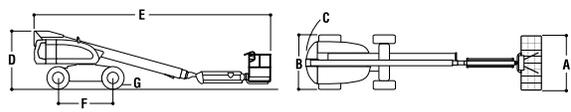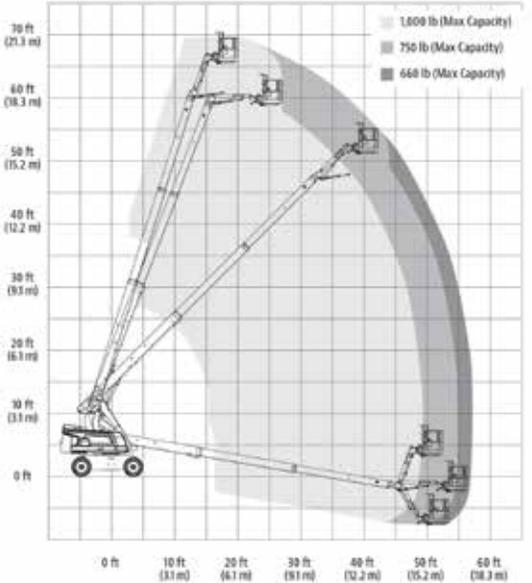

600 Crawler Series Telescopic Boom Lifts

660SJC


Platform Height	65' 7" (19.99 m)
Horizontal Outreach	57' 0.6" (17.39 m)
Swing	360° Continuous
Platform Capacity-Restricted	750 lb (340 kg)
Platform Capacity-Unrestricted	550 lb (249 kg)
Platform Rotator	180° Hydraulic
Jib (range of articulation)	132° (+71, -61)
A. Platform Size	36 x 96" (0.91 x 2.44 m)
B. Overall Width	8' 2" (2.49 m)
C. Tailswing	4' (1.22 m)
D. Stowed Height	8' 1.2" (2.47 m)
E. Stowed Length	35' 4.7" (10.79 m)
F. Ground Clearance	15" (38 cm)
Weight*	27,620 lb (12,528 kg)
Max. Ground Bearing Pressure	6.5 psi (0.457 kg/cm ²)
Drive Speed	1.6 mph (2.6 km/h)
Gradeability	55%
Turning Radius	Zero
Type of Tracks**	Steel
Tracks Width	20" (51 cm)
Diesel Engine	Deutz TD2.9L4 Tier 4 Final 67 hp (50 kW)
Fuel Tank Capacity	31 gal. (117 L)
Hydraulic Reservoir	34 gal. (129 L)
Auxiliary Power	12V DC

*Certain options or country standards increase weight.

**Available with detachable rubber pads.

Specifications may change to meet country standards or with addition of optional equipment.

660SJC

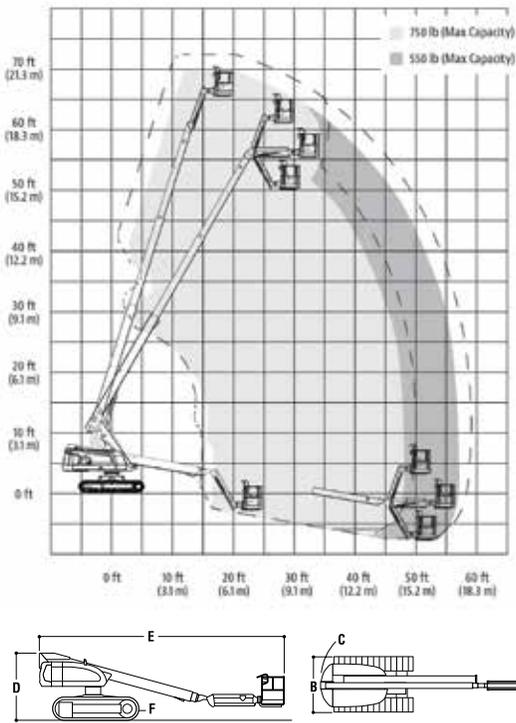

SPECIAL FEATURES INCLUDE:

- Better mobility with a zero turning radius.
- Increased flotation with a choice of tracks.
- Easier control with a unique single-joystick control.
- SkyGuard SkyLine™
- Load sensing system

800 Series Telescopic Boom Lifts



	800S	800S HC3	860SJ	860SJ HC3
Platform Height	80' (24.38 m)	80' (24.38 m)	86' (26.21 m)	86' (26.21 m)
Horizontal Outreach	71' (21.64 m)	71' 3" (21.78)	75' (22.86 m)	74' 8.9" (22.78)
Swing	360° Continuous	360° Continuous	360° Continuous	360° Continuous
Platform Capacity-Restricted	1,000 lb (454 kg)	1,000 lb (454 kg)	750 lb (340 kg)	750/1000 lb (340/454 kg)
Platform Capacity-Unrestricted	500 lb (227 kg)	500 lb (227 kg) ¹	500 lb (227 kg)	500 lb (227 kg) ¹
Platform Rotator	180° Hydraulic	180° Hydraulic	180° Hydraulic	180° Hydraulic
Jib (range of articulation)	N/A	N/A	6' (1.83 m), 130° (+70, -60)	6' (1.83 m), 130° (+70, -60)
A. Platform Size	36 x 96" (0.91 x 2.44 m)			
B. Overall Width	8' 2" (2.49 m)			
C. Tailswing	4' 8" (1.42 cm)			
D. Stowed Height	9' 11" (3.02 m)	9' 11" (3.02 m)	10' (3.05 m)	10' (3.05 m)
E. Stowed Length	37' 3" (11.35 m)	37' 3" (11.35 m)	40' (12.19 m)	40' (12.19 m)
F. Wheelbase	10' (3.05 m)	10' (3.05 m)	10' (3.05 m)	10' (3.05 m)
G. Ground Clearance	11" (28 cm)	11" (28 cm)	11" (28 cm)	11" (28 cm)
Weight [*]	33,030 lb (14,982 kg)	33,030 lb (14,982 kg)	36,888 lb (16,732 kg)	38,040 lb (17,255 kg)
Max. Ground Bearing Pressure ^{**}	72 psi (5.06 kg/cm ²)	72 psi (5.06 kg/cm ²)	81 psi (5.69 kg/cm ²)	115 psi (8.09 kg/cm ²)
Drive Speed 2WD/4WD	3.5 mph (5.6 km/h)			
Tilt Cut-Out	4°	4°	4°	4°
Gradeability 2WD	25%	25%	25%	25%
Gradeability 4WD	45%	45%	45%	45%
Turning Radius (inside)	12' 6" (3.8 m)			
Turning Radius (outside)	19' 8" (6.02 m)			
Axle Oscillation	8" (20 cm)	8" (20 cm)	8" (20 cm)	8" (20 cm)
Tire Size/Type	15-625 Foam Filled Lug Tread			
Dual Fuel Engine	Ford MSG425-DF 84 hp (62.6 kW)			
Diesel Engine	Deutz TD2.9L4 Tier 4 Final 67 hp (50 kW)	Deutz TD2.9L4 Tier 4 Final 67 hp (50 kW)	Deutz TD2.9L4 Tier 4 Final 67 hp (50 kW)	Deutz TD2.9L4 Tier 4 Final 67 hp (50 kW)
Fuel Tank Capacity	31 gal. (117.35 L)			
Hydraulic Reservoir	48 gal. (181.7 L)			
Auxiliary Power	12V DC	12V DC	12V DC	12V DC

*Certain options or country standards increase weight.

**Ground bearing pressure applies to standard tires.


Specifications may change to meet country standards or with addition of optional equipment.

1. 500 lb capacity rated for 2 occupants plus tools/materials


SPECIAL FEATURES INCLUDE:

- Improved access—A narrow fixed-width frame eliminates the need for extendable axles and allows for faster set-up.
- Optimum performance—Go from the ground to 80 ft (24.38 m) in less than 67 seconds, up to 40% faster than the competition.
- Lower operating costs—Better fuel efficiency, Control ADE (Advanced Design Electronics) system, and a swing out engine tray.
- Greater mobility—Powers through mud with 4WD, oscillating axles and a low weight.
- Revolutionary WorkStation in the Sky® options and accessories.
- SkyGuard SkyLine™
- Load sensing system


800S

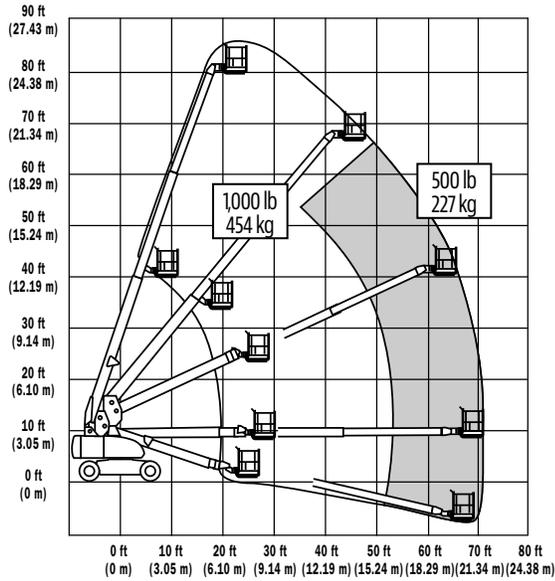


860SJ

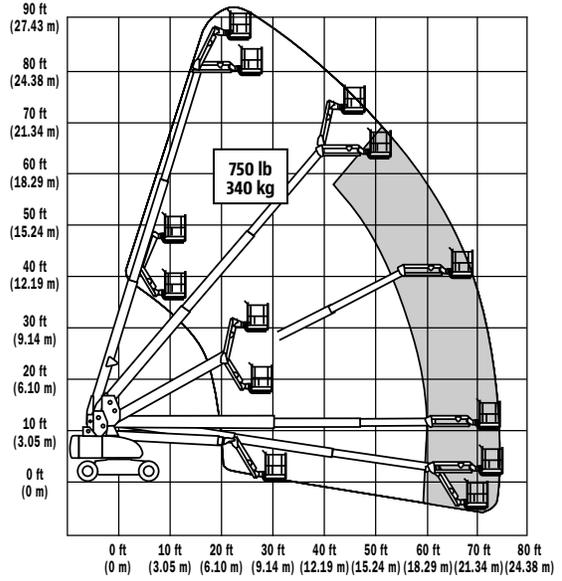

800S HC3

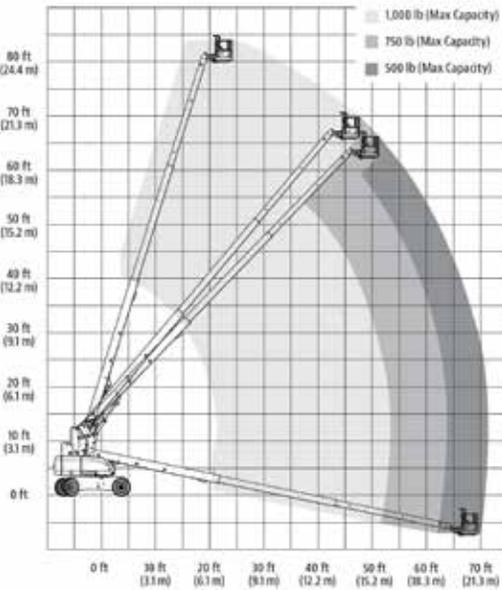

860SJ HC3

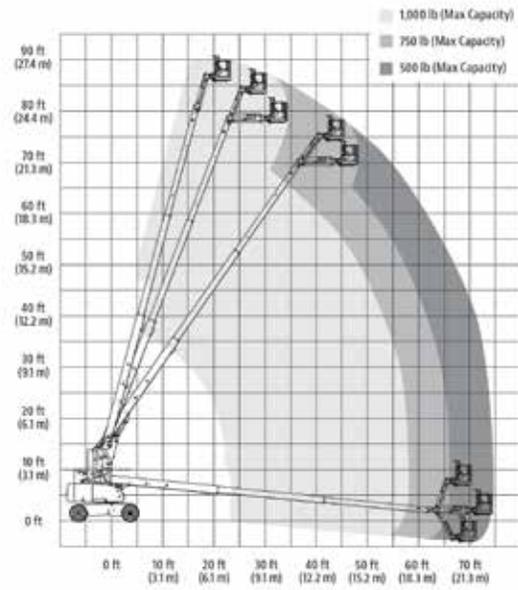

Ultra Series Telescopic Boom Lifts

	1200SJP	1350SJP	1500SJ	1850SJ
Platform Height	120' (36.58 m)	135' (41.15 m)	150' (45.7 m)	185' 7" (56.56 m)
Horizontal Reach	75' (22.86 m)	80' (24.38 m)	80' (24.38 m)	80' (24.38 m)
Swing	360° Continuous	360° Continuous	360° Continuous	360° Continuous
Platform Capacity—Restricted	1,000 lb (454 kg)	1,000 lb (454 kg)	1,000 lb (454 kg)	1,000 lb (454 kg)
Platform Capacity—Unrestricted	500 lb (227 kg)	500 lb (227 kg)	500 lb (227 kg)	500 lb (227 kg)
Platform Rotator	180°	180°	180°	173°
JibPLUS*				
Length	8' (2.44 m)	8' (2.44 m)	Retracted 15' 2" (4.62 m) Extended 25' (7.62 m)	Retracted 13' (3.96 m) Extended 20' (6.1 m)
Horizontal Motion	180°	180°	For Transport Only	For Transport Only
Vertical Motion ²	130° (+75, -55)	130° (+75, -55)	120° (+75, -45)	120° (+75, -45)
A. Platform Size	36 x 96" (0.91 x 2.44 m)	36 x 96" (0.91 x 2.44 m)	36 x 96" (0.91 x 2.44 m)	36 x 96" (0.91 x 2.44 m)
B. Overall Width—Axles Retracted	8' 2" (2.49 m)	8' 2" (2.49 m)	8' 2" (2.49 m)	8' 2" (2.49 m)
Overall Width—Axles Extended	12' 6" (3.81 m)	12' 6" (3.81 m)	12' 6" (3.81 m)	16' 6" (5.03 m)
C. Tailswing	5' 6" (1.67 m)	5' 6" (1.67 m)	5' 6" (1.67 m)	7' 7" (2.32 m)
D. Stowed Height	10' (3.05 m)	10' (3.05 m)	10' (3.05 m)	10' (3.05 m)
E. Stowed Length	34' 11" (10.64 m)	38' 11" (11.86 m)	43' (13.11 m)	47' 9.5" (14.57 m)
F. Wheel Base	12' 6" (3.81 m)	12' 6" (3.81 m)	12' 6" (3.81 m)	17' 1.5" (5.22 m)
G. Ground Clearance				
Axle	12" (30 cm)	12" (30 cm)	12" (30 cm)	13.5" (34 cm)
Chassis	25.5" (65 cm)	25.5" (65 cm)	25.5" (65 cm)	16.25" (41 cm)
Weight ¹	41,100 lb (18,650 kg)	44,750 lb (20,300 kg)	48,000 lb (21,772 kg)	59,900 lb (27,170 kg)
Max Ground Bearing Pressure ²	99 psi (7.0 kg/cm ²)	107 psi (7.52 kg/cm ²)	113 psi (7.94 kg/cm ²)	119.6 psi (8.41 kg/cm ²)
Drive Speed	3.25 mph (5.2 km/h)	3.25 mph (5.2 km/h)	3.0 mph (4.8 km/h)	2.8 mph (4.5 km/h)
Tilt Cut-Out	5°	5°	4°	5°
Gradeability	45%	45%	40%	40%
Turning Radius (inside)				
Axles Retracted	14' 5" (4.39 m)	14' 5" (4.39 m)	14' 5" (4.39 m)	23' 4" (7.12 m)
Axles Extended	8' (2.44 m)	8' (2.44 m)	8' (2.44 m)	7' 7" (2.3 m)
Turning Radius (outside)				
Axles Retracted	22' 6" (6.86 m)	22' 6" (6.86 m)	22' 6" (6.86 m)	31' 3" (9.52 m)
Axles Extended	19' 4" (5.89 m)	19' 4" (5.89 m)	19' 4" (5.89 m)	21' 8" (6.6 m)
Crab Steer Ratio ³	1:1	1:1	1:1	1:1
Axle Oscillation	12" (30 cm)	12" (30 cm)	12" (30 cm)	0" (0 cm)
Tires/Type	445/50D710 Foam-Filled	445/50D710 Foam-Filled	445/50D710 Foam-Filled	445/50D710 Foam-Filled
Diesel Engine	Deutz TD2.9L4 Tier 4 Final 74.2 hp (55.4 kW)	Deutz TD2.9L4 Tier 4 Final 74.2 hp (55.4 kW)	Deutz TD2.9L4 Tier 4 Final 74.2 hp (55.4 kW)	Deutz TCD3.6L Tier IVF 99.8 hp (74.4 kW)
Fuel Tank Capacity	31 gal. (117.35 L)	31 gal. (117.35 L)	31 gal. (117.35 L)	52.8 gal. (200 L)
Hydraulic Reservoir	55 gal. (208.2 L)	55 gal. (208.2 L)	55 gal. (208.2 L)	75.1 gal. (284.2 L)
Auxiliary Power	12V DC	12V DC	12V DC	12V DC

*Ground bearing pressure applies to standard tires.



1. Certain options or country standards increase weight.

2. Capacity is limited to 500 lb when JibPLUS® is extended horizontally.



3. Ratio of forward travel to lateral travel.

Specifications may change to meet country standards or with addition of optional equipment.



1200SJP

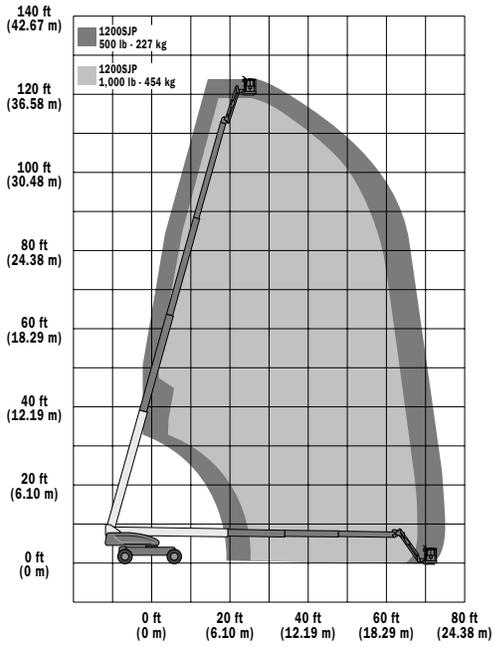



1350SJP

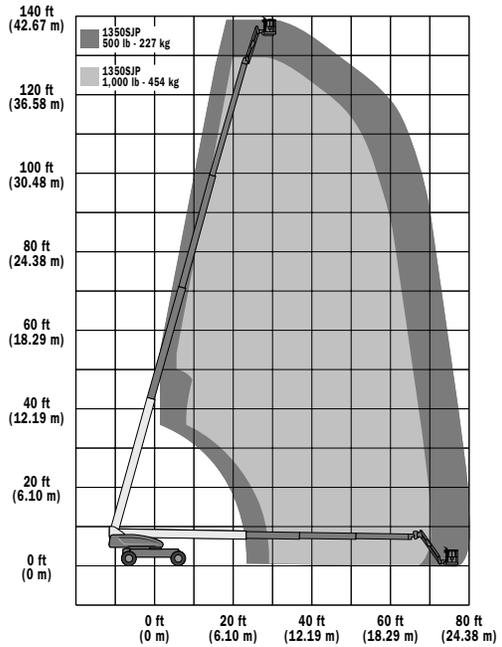

1500SJ

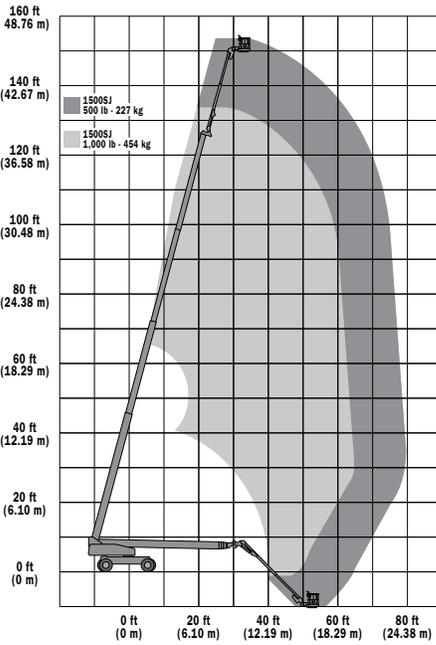



1850SJ

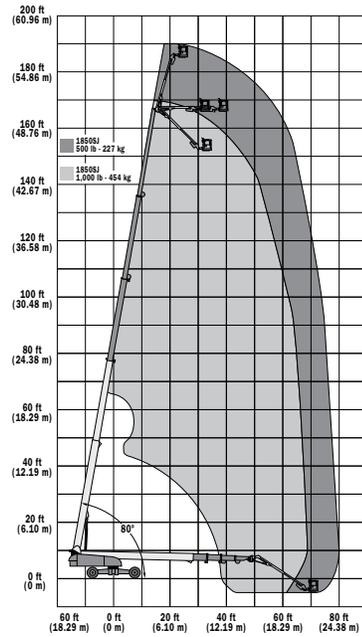



Tow-Pro® Series Towable Boom Lifts

	T350	T500J
Platform Height	34' 5" (10.5 m)	50' 9.5" (15.3 m)
Horizontal Outreach		
Working Outreach	20' 2" (6.15 m)	31' 6" (9.6 m)
Centerline to Platform Edge	18' 9.5" (5.7 m)	29' 6" (9 m)
From Outrigger Pad Edge	13' 6" (4.11 m)	23' 5" (7.14 m)
Up and Over Height	15' (4.57 m)	18' (5.49 m)
Swing	410° Non-Continuous	410° Non-Continuous
Platform Capacity		
Standard Platform	500 lb (227 kg)	500 lb (227 kg)
Optional Platform Rotator	440 lb (200 kg)	440 lb (200 kg)
Material Hook Capacity	500 lb (227 kg)	500 lb (227 kg)
Platform Rotator (optional)	90° Manual	90° Manual
Jib		
Length	N/A	4' (1.22 m)
Vertical Motion	N/A	130 degrees (+75, -55)
A. Platform Size	30 x 48" (0.76 x 1.22 m)	30 x 48" (0.76 x 1.22 m)
B. Overall Width	4' 11.25" (1.50 m)	5' 7" (1.7 m)
C. Outrigger Footprint—Length	11' 7" (3.51 m)	12' 4" (3.7 m)
D. Outrigger Footprint—Width	10' 5" (3.18 m)	12' 8" (3.8 m)
E. Stowed Height	6' 6" (2.0 m)	7' .5" (2.15 m)
F. Stowed Length	21' 9" (6.6 m)	27' 4" (8.32 m)
Ground Clearance	14" (36 cm)	15" (38 cm)
Entry Height—Extended	10" (25 cm)	15" (38 cm)
Leveling Capability	11°	11°
Weight	3,400 lb (1,542 kg)	4,800 lb (2,177 kg)
Max. Ground Bearing Pressure	23 psi (1.62 kg/cm ²)	31 psi (2.18 kg/cm ²)
Drive & Set Speed	3.0 mph (4.8 Km/h)	3.0 mph (4.8 Km/h)
Drive & Set Gradeability	20%	20%
Towing Speed Rating	65 mph (105 Km/h)	65 mph (105 Km/h)
Tongue Weight	250 lb (114 kg)	350 lb (159 kg)
Brakes		
Parking Brakes	Std.	Std.
Tire Size/Type	ST215/75 R14 Pneumatic	ST225/75 R15 Pneumatic
DC Power	24V DC	24V DC
Batteries	4 x 6V, 220 amp-hr	4 x 6V, 220 amp-hr
Gasoline Engine (optional)	Honda GX 270—9 hp	Honda GX 270—9 hp
Fuel Tank Capacity (optional)	1.6 gal. (6.1 L)	1.6 gal. (6.1 L)
Hydraulic Reservoir	4.0 gal. (15.14 L)	6.0 gal. (22.71 L)

T350

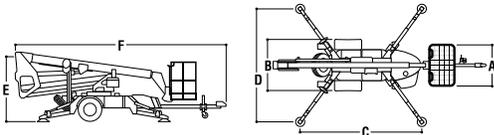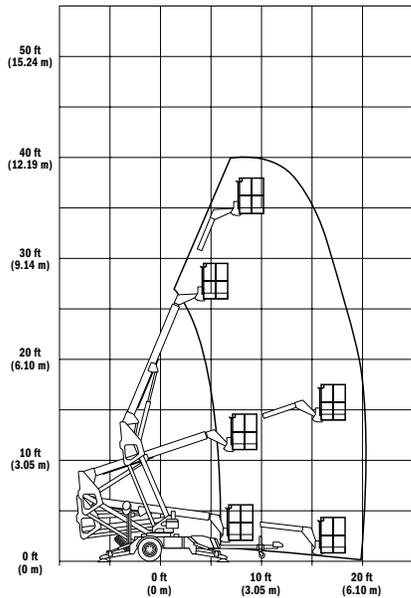

T500J

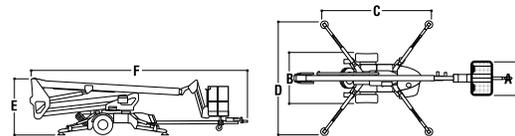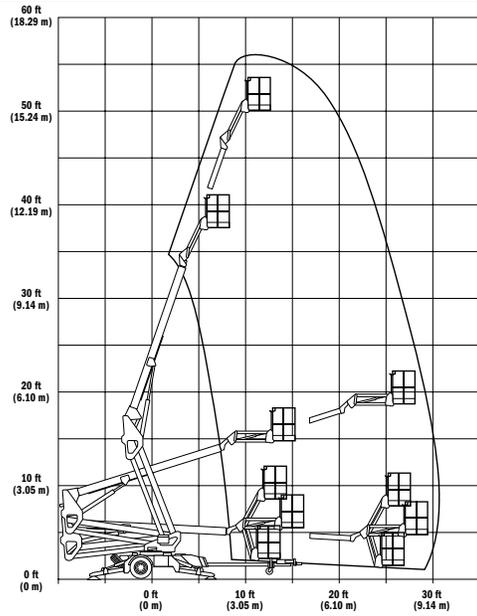

SPECIAL FEATURES INCLUDE:

- 34 ft 5 in.(10.5 m) and 50 ft 9.5 in. (15.3 m) models.
- Hydraulic auto-leveling outriggers for faster and easier set-up.
- 24V DC electric or gasoline powered engine.
- Platform controls with one-hand operation of boom functions.
- Accessory Mounting Tray accommodates customer provided generator, air compressor or pressure washer.
- Standard air and water lines to the platform.

TRIPLE-L[®] Trailers

FLAT BED SERIES	248	449	4610	7610	7612	7614	7616	1012	1014
Capacity	2,200 lb (998 kg)	5,000 lb (2,268 kg)	4,500 lb (2,041 kg)	7,000 lb (3,175 kg)	7,000 lb (3,175 kg)	7,000 lb (3,175 kg)	6,500 lb (2,948 kg)	10,000 lb (4,536 kg)	10,000 lb (4,536 kg)
Deck Width	4' 4" (1.32 m)	4' 4" (1.32 m)	6' (1.83 m)	6' (1.83 m)	6' (1.83 m)	6' (1.83 m)	6' (1.83 m)	5'10" (1.78 m)	5'10" (1.78 m)
Deck Length	8' (2.44 m)	9' (2.74 m)	10' (3.05 m)	10' (3.05 m)	12' (3.66 m)	14' (4.27 m)	16' (4.88 m)	12' (3.66 m)	14' (4.27 m)
Chassis Width	80" (2.03 m)	80" (2.03 m)	101" (2.57 m)	101" (2.57 m)	101" (2.57 m)	101" (2.57 m)	101" (2.57 m)	101" (2.57 m)	101" (2.57 m)
Overall Length	14' (4.27 m)	14' (4.27 m)	15' (4.57 m)	15' (4.57 m)	17' (5.18 m)	19' (5.79 m)	21' (6.4 m)	17' (5.18 m)	19' (5.79 m)
Trailer Weight*	1,510 lb (685 kg)	1,670 lb (758 kg)	2,070 lb (939 kg)	2,500 lb (1,134 kg)	2,690 lb (1,220 kg)	2,930 lb (1,329 kg)	3,150 lb (1,429 kg)	3,010 lb (1,365 kg)	3,210 lb (1,456 kg)
Lift Mechanism	Winch	Hydraulic	Hydraulic						
Axle	Single	Single	Single	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
Wheel Size	15" (0.38 m)	16" (0.41 m)	14.5" (0.37 m)	15" (0.38 m)	15" (0.38 m)	15" (0.38 m)	15" (0.38 m)	16" (0.41 m)	16" (0.41 m)
Brakes	Optional	Electric	Electric						
Hitch - Ball Size	2" (.05 m)	2.3" (.058 m)	2.3" (.058 m)	2.3" (.058 m)	2.3" (.058 m)	2.3" (.058 m)	2.3" (.058 m)	2.3" (.058 m)	2.3" (.058 m)

*Will vary slightly with optional equipment.

UTILITY SERIES	UT28	UT49	UT410	UT610	UT612	UT614	UT912	UT914
Capacity	2,200 lb (998 kg)	5,000 lb (2,268 kg)	4,500 lb (2,041 kg)	7,000 lb (3,175 kg)	7,000 lb (3,175 kg)	6,500 lb (2,948 kg)	10,000 lb (4,536 kg)	10,000 lb (4,536 kg)
Deck Width	4' 4" (1.32 m)	4' 4" (1.32 m)	6' (1.83 m)	6' (1.83 m)	6' (1.83 m)	6' (1.83 m)	5' 10" (1.78 m)	5' 10" (1.78 m)
Deck Length	8' (2.44 m)	9' (2.74 m)	10' (3.05 m)	10' (3.05 m)	12' (3.66 m)	14' (4.27 m)	12' (3.66 m)	14' (4.27 m)
Chassis Width	80" (2.03 m)	80" (2.03 m)	101" (2.57 m)	101" (2.57 m)	101" (2.57 m)	101" (2.57 m)	101" (2.57 m)	101" (2.57 m)
Overall Length	14' (4.27 m)	14' (4.27 m)	15' (4.57 m)	15' (4.57 m)	17' (5.18 m)	19' (5.79 m)	17' (5.18 m)	19' (5.79 m)
Trailer Weight*	1,590 lb (721 kg)	1,795 lb (814 kg)	2,220 lb (1,007 kg)	2,650 lb (1,202 kg)	2,850 lb (1,293 kg)	3,050 lb (1,383 kg)	3,170 lb (1,438 kg)	3,370 lb (1,529 kg)
Lift Mechanism	Winch	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Axle	Single	Single	Single	Tandem	Tandem	Tandem	Tandem	Tandem
Wheel Size	15" (0.38 m)	16" (0.41 m)	14.5" (0.37 m)	15" (0.38 m)	15" (0.38 m)	15" (0.38 m)	16" (0.41 m)	16" (0.41 m)
Standard Brakes	Optional	Electric	Electric	Electric	Electric	Electric	Electric	Electric
Hitch - Ball Size	2" (.05 m)	2.3" (.058 m)	2.3" (.058 m)	2.3" (.058 m)	2.3" (.058 m)	2.3" (.058 m)	2.3" (.058 m)	2.3" (.058 m)

*Will vary slightly with optional equipment.

Cold Weather Package Options


Package	Cold Weather Package	Cold Package Plus	Arctic Package
Operating Temperature	-20°F	-20° F	-40°F
Engine Components			
Engine Block/Oil Pan Heater	X	X	X
Battery Blanket	X	X	X
Glow Plugs (standard on all diesel engines)	X	X	X
Anti-Freeze			X
Engine Oil — Mobil 10W-40		X	X
Diesel Fuel Conditioner		X	X
Hydraulic Components			
Arctic Hydraulic Oil		X	X
Drive and steer hydraulic hoses - Polar Flex hose			X
Hydraulic tank heater	X	X	X
Electrical Components			
Main Control Cable in Boom - Polar Cable with Temperature Range to -550°F (-323°C)			X
Oversized control-enable footswitch cover — 8" x 8"		X	X
Model Availability			
340AJ	X		X
H340AJ	X		
H800AJ	X		
450AJ	X		X
600A Series	X		X
800A Series	X		X
400S Series	X		X
400SC Series	X		X
600S Series	X		X
600SC Series	X		X
800S Series	X		X
Ultra Series	X	X	
LRT Series Scissors (Diesel Only)	X		
Engine Availability			
Ford/Kubota	X		X
Deutz	X	X	X

WorkStation in the Sky®

Engine Powered Booms	SkyWelder®	SkyPower®	SkyGlazier ¹	Pipe Rack ¹		
400S	X	X	X	X		
460SJ	X	X	X	—		
600S	X	X	X	X		
660SJ	X	X	X	X		
800S	X	X	X	X		
860SJ	X	X	X	X		
1200SJP	X	X	X	X		
1350SJP	X	X	X	X		
1500SJ	X	X	X	X		
1850SJ	X	X	X	X		
450A/AJ	X	X	X	—		
600A/AJ	X	X	X	X		
800A/AJ	X	X	X	X		
1250AJP	X	X	X	X		
1500AJP	X	X	X	X		
LRT Scissors	SkyWelder®	SkyPower®	WorkStation			
330LRT	X	X	X			
430LRT	X	X	X			
530LRT	X	X	—			
Electric Scissors	Electrician's Package	Plumber's Package	Plant Package	Panel Carrier	Pipe Rack	Electrician's Tree
1930ES ¹	—	—	—	—	—	X
2032ES ¹	—	—	—	X	X	X
2632ES	—	—	—	X	X	X
2646ES	X	X	X	X	X	X
3246ES	X	X	X	X	X	X
Vertical Mast	Tool Tray					
AM	X					

1. Available through JLG aftermarket

Workstation in the Sky®

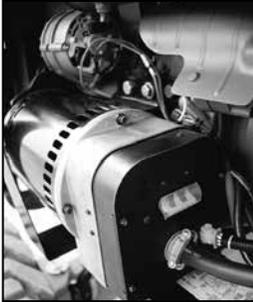

SkyPower® Package

JLG delivers more power where you need it with the SkyPower® Package. Machines with the SkyPower® Package include a self-contained 7500W generator with a power cable. A side-entry platform provides improved entry and allows for quick installation of the SkyGlazier® panel tray. These features combine to provide the power for hand tools and many add-on JLG accessory packages including SkyWelder®, SkyCutter® and the SkyGlazier® packages. Fits select boom and scissor models.



SkyGlazier® Package

The first and only factory-approved glass and panel tray. Utilizes industry-leading JLG capacity to get materials to the work site. Improves productivity and reduces operator fatigue, while protecting panels from damage. Fits select boom models.



SkyWelder® Package

A 280 amp Miller® CST™ 280 is tucked into the SkyPower® boom platform. Conserves space and provides stick and TIG capability. Helps eliminate potentially dangerous leads hanging over the rails and the unnecessary cost of a stand-alone welder and power supply. Flux core wire feed capability available — see Miller® Electric Mfg. Co. recommendations. Other convenient features are also available. Fits select boom and LRT scissor models.



Pipe Rack

Pipe racks provide a means for factory-approved storage of pipe or conduit inside the platform to help prevent rail damage and optimize platform utility. Pipe Racks reduce clutter and optimize available platform capacity. Fits select boom models.



Soft Touch System

A padding kit is mounted to the platform guardrails and to a frame suspended below the platform. Proximity sensors deactivate platform functions when the padded framework contacts an adjacent structure. An override button permits "undoing." Fits select boom and scissor models.

*Miller® is a trademark of Miller Electric.
Some options available exclusively through JLG aftermarket



JLG Workstation in the Sky®

This removable workstation optimizes platform space by holding a reciprocating saw, drill, circular saw, battery charger and six-inch by six-inch component boxes keeping your tools and components all within arm's reach. Plus, a pull-out tray is included to provide a flat working surface near the top of the rails. Fits select scissor models.



Pipe/Conduit Racks

Free up platform space and reduce trip hazards by storing pipe or conduit outside of the platform in the optimal lifting position for the installer. Fits select scissor models.

Note: 100 lb capacity on 30 in. wide ES models; 200 lb, capacity on 46 in. wide ES models; 570 lb capacity on 330LRT and 430LRT.



Electrician Tree

Speed up wire pulling and reduce friction associated with ground based wire trees by carrying four to six 500-foot wire spools (based on model) in the scissor lift platform. Fits select scissor models.



Panel Carrier

Optimize usable platform space by storing drywall or other panels outside of the platform. (100 lb capacity on 30 in. wide ES models; 200 lb capacity on 46 in. wide ES models). Fits select scissor models.



Large Material Rack

The large material rack is designed to help operators position items such as pipes, HVAC, dry-wall and other construction materials into place. This is available on the LRT models and has a max. capacity of rack is 860 lbs. Machine capacity varies depending on model, two operators are allowed to work when using the material rack. Fits select scissor models.

*Some options available exclusively through JLG aftermarket

ES Scissor Workstation in the Sky Accessories

	1930ES+ + 92.6 Specification, available through JLG aftermarket	2032ES+	2632ES	2646ES	3246ES
Electrician's Package	N/A	N/A	N/A	\$4,355	\$4,355
Plumber's Package	N/A	N/A	N/A	\$7,930	\$7,930
Plant Package	N/A	N/A	N/A	\$12,145	\$12,145
Workstation w/o 12V Plug	\$945	\$945	\$945	\$945	\$945
Panel Carrier	\$1,415	\$1,415	\$1,415	\$1,415	\$1,415
Pipe Racks	N/A	\$965	\$965	\$965	\$965
Vise	N/A	N/A	N/A	See Package Options	See Package Options
Electrician's Tree	\$1,025	\$1,025	\$1,025	\$1,025	\$1,025

	Package 1¹	Package 2¹	Package 3¹
	Electrician Package	Plumber Package	Plant Maintenance Package
Workstation	Included	Included	Included
Pipe Racks	Included	Included	Included
Vise	Included ²	Included ²	Included ²
Electrician Tree	Included	N/A	N/A

1. Two accessories can be used at one time on models 1930ES, 2030ES and 2630ES
 2. Only models 2646ES and 3246ES include vise

* Some options available exclusively through JLG aftermarket
 + 92.6 Specification, available through JLG aftermarket

Highlighted Accessories and Options




CLEARSKY

ClearSky™ is the simple, flexible and easy-to-use fleet management solution from JLG. ClearSky takes the guesswork out of managing your fleet. It translates complex data into usable solutions, so you can anticipate problems and maximize productivity. Visit www.jlg.com/clearsky to learn more.



JLG™ MOBILE CONTROL

Introducing JLG™ Mobile Control, the new option from JLG that allows you to drive, steer and load your stowed scissor lift from your mobile device. With your machine equipped with JLG Mobile Control, you can operate, position and load. Visit www.jlg.com/mobilecontrol to learn more.

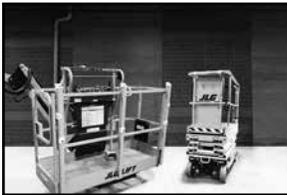

SKYSENSE™

SkySense is an enhanced detection system from JLG that uses strategically placed object detection sensors to provide operators an added level of awareness of their immediate surroundings as they elevate and/or drive. When a machine is in use, the sensors establish warning zones and stop distances in the machine's direction of motion, increasing protection of people and property. The warning zones scale for functions with proportional joystick input, which is unique to JLG and SkySense. See it in action at <https://youtu.be/CIHICvMgez0>.

BOOMS –

Level I: 8 sensor - Includes 4 sensors on the left rear of the platform and 4 sensors on the right rear of the platform
Level II: 12 sensors – Adds an additional 3 sensors in the center rear of the platform and one sensor above and in front of the control panel

SCISSORS –

Level I: 4 sensors – Includes 2 sensors at the front of the platform and 2 sensors at the rear of the platform
Level II: 8 sensors – Adds an additional 2 sensors on both sides of the platform

AFTERMARKET EXCLUSIVE OPTIONS AND ACCESSORIES:

Some of your favorite options, accessories and attachments may now be available exclusively via JLG Aftermarket.

MEWP ACCESSORIES/OPTIONS

- AGM Batteries
- Mesh to Top/Mesh to Mid Rail
- SkyGlazier
- Pipe Racks
- Fire Extinguisher
- Steel Console Cover

VERTICAL/STOCKPICKER ACCESSORIES/OPTIONS

- Straddle Kit
- Rug Carrier
- Fluorescent Tube Caddy
- Spare Platform 26x50 QC Gullwing
- Spare Platform 28x26 QC Gullwing

TELEHANDLER ATTACHMENTS

- Models 742, 943, 1055, 1255, 6036, 6042, 8042, 10042, 10054: 8 ft. Tower with 50 in. Std. Carriage
- Fork Mounted Bucket
- Truss Booms
- Fork Mounted Lifting Hook
- Material Handling Arm
- Trash Hopper

NOTE: To be compliant, JLG machines equipped with ClearSky™ telematics must be received by countries that are certified to have ClearSky™. For the list of certified countries, please visit JLG.com/ClearSky=/certification.

Price List

Effective January 1, 2020



Scissor Lift Price List

R1932i/R1932/2632R/3246R/4045R

Model	GVW	Dims (L"xW"xH")	Indoor	Outdoor	Tilt Rating	Price
R1932i	2675	68.7x32x82.8	Occupants 1, Capacity 507 lbs.	N/A	Indoor side to side 2.75°, Outdoor side to side N/A, Fore and aft 2.75°	\$15,990
R1932	3353	68.7x32x82.8	Occupants 2, Capacity 507 lbs.	Occupants 1, Capacity 507 lbs.	Indoor side to side 1.75°, Outdoor side to side 1.5°, Fore and aft 3.75°	\$17,000
R2632	4280	94.3x32x88.2	Occupants 2, Capacity 507 lbs.	Occupants 1, Capacity 275 lbs.	Indoor side to side 1.5°, Outdoor side to side 1.5°, Fore and aft 3.5°	\$24,750
R3246	5410	94.3x46x96.3	Occupants 2, Capacity 705 lbs.	Occupants 1, Capacity 507 lbs.	Indoor side to side 2.5°, Outdoor side to side 1.5°, Fore and aft 3.5°	\$31,250
R4045	7000	106x45x100	Occupants 3, Capacity 770 lbs.	Occupants 2, Capacity 550 lbs.	Indoor side to side 1.5°, Outdoor side to side 1.5°, Fore and aft 3.5°	\$43,250

STANDARD FEATURES

PLATFORM SECTION

Diamond Tread Steel Deck
 Fold Down Rails with Self-Closing Gate
 Foot-Actuated Deck Extension
 Lanyard Attach Points
 Moveable, Removable Platform Control Box
 Nickel Plated Pins

CHASSIS SECTION

Active PHP System
 Dual Scissor Maintenance Props (R4045 Only)
 Dynamic Braking
 Fork Lift Pockets
 Greaseless Kingpin Joints
 Hydraulic Drive
 Lubrication Free Scissor Arm Bushings
 Machine Tie Downs
 Manual Descent Cable
 Steel Swing-Out Doors

TIRES

12.7 x 4" Solid Non-Marking Tires (19' models)
 16 x 5" Solid Non-Marking Tires (All other models)

ELECTRICAL

110V-AC Receptacle in Platform
 27 Amp High Frequency Charger
 All Motion Alarm
 Analyzer Port for Diagnostics
 Horn
 Hourmeter

MISCELLANEOUS

Proportional Controls
 Self-Centering Arm Stack (R4045 Only)
 Single Drive/Steer Joystick

TECHNOLOGY

Battery Condition Indicator
 Load Sensing System
 Tilt Alarm and Light
 Variable Tilt Visual Zone Indicator

INDIVIDUAL OPTIONS

PLATFORM SECTION

Coiled Platform Control Box Cable \$165
 QuikFold Rails (R1932/R1932i Only) \$300
 QuikAccess Platform (R1932 only) \$650

CHASSIS SECTION

Multi-Digital Indicator (Ground) \$205
 Drive Motor Covers \$185

ELECTRICAL

Batteries, 12V-185Ah¹ (50% more battery life) \$420
 Batteries, 6V, 250Ah³ \$350
 Battery Charger Eagle 110V Plug \$345
 Flashing Amber Beacon - LED \$95
 Dual Flashing Amber Beacons - LED \$190
 Inverter \$1,320
 JLG™ Mobile Control \$500
 White Noise Backup Alarm \$580

ACCESSORIES

Electrician's Tree ² \$1,025
 Panel Carrier ³ \$1,415
 Platform Worklights ⁴ \$830

MISCELLANEOUS

Antivandalism Package ⁵ \$310
 Special Hydraulic Fluid Consult Factory
 Special Paint Consult Factory

TECHNOLOGY

CAN - Enabled Charger \$250
 ClearSky™ Consult Factory

The JLG "1 & 5" Warranty & Machine Shipments see page 1

1. R4045 Only

2. R4045 Only

3. Available On R2632/R3246

4. R4045 Only

5. Includes Platform And Ground Control Panels W/ Locking Bracket

Note: Some options may increase lead time, and some option combinations may not be available.

LIGHTWEIGHT ES SERIES

Scissor Lift Price List



ES1330L/ES1530L

Now available with Indoor and Outdoor Rating

ES1330L					\$15,990
GVW: 1984	Dims: (L"xW"xH") 56.2"x30"x71.7"	Indoor: Occupants 2, Capacity 500 lbs.	Outdoor: Occupants 1, Capacity 500 lbs.	Tilt Rating: Indoor side to side 1.75°, Outdoor side to side 1.5°, Fore and aft 3°	
ES1530L					\$15,990
GVW: 1940	Dims: (L"xW"xH") 56.2"x30"x74.8"	Indoor: Occupants 1, Capacity 500 lbs.	Outdoor: Occupants 1, Capacity 500 lbs.	Tilt Rating: Indoor side to side 2.25°, Outdoor side to side 1.5°, Fore and aft 3°	

STANDARD FEATURES

PLATFORM SECTION
22 in. (55 cm) Foot-Actuated Deck Extension
Platform Control Box Cable
Lanyard Attach Points
Movable, Removable Platform Control
Nickel Plated Pins
Fixed Rails with Self-Closing Gate
CHASSIS SECTION
Lubrication Free Scissor Arm Bushings
Scissor Maintenance Prop
TIRES
10 x 3" Solid Non-Marking Tires
ELECTRICAL
110V-AC Receptacle in Platform
27 amp Multi-Function Universal Charger
All Motion Alarm
Horn
Hourmeter
MISCELLANEOUS
Proportional Controls
TECHNOLOGY
Battery Condition Indicator
Load Sensing System
Tilt Alarm and Light

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Coiled Platform Control Box Cable	\$165
CHASSIS SECTION	
Multi-Display Indicator MDI	\$205
ELECTRICAL	
Flashing Amber Beacon - LED	\$95
Dual Flashing Amber Beacons - LED	\$190
ACCESSORIES	
CleanGuard	\$500
MISCELLANEOUS	
Antivandalism Package	\$310 ¹
Special Paint	Consult Factory
TECHNOLOGY	
Mobile Control	\$500

1. Includes Platform and Ground Control Panels W/ Locking Bracket

Note: Some options may increase lead time, and some option combinations may not be available.

The JLG "1 & 5" Warranty & Machine Shipments see page 1

Scissor Lift Price List

ES1932i/ES1932/2632ES/2646ES/3246ES

ES1932i	GVW: 2675	Dims: (L"xW"xH") 68.7x32x82.8	Indoor: Occupants 1, Capacity 507 lbs.	Outdoor: N/A	Max Tilt Rating: Indoor side to side 2.75°, Outdoor side to side N/A, Fore and aft 2.75°	\$16,850
ES1932	GVW: 3353	Dims: (L"xW"xH") 68.7x32x82.8	Indoor: Occupants 2, Capacity 507 lbs.	Outdoor: Occupants 1, Capacity 507 lbs.	Max Tilt Rating: Indoor side to side 1.75°, Outdoor side to side 1.5°, Fore and aft 3.75°	\$17,860
2632ES	GVW: 4700	Dims: (L"xW"xH") 90.5x32x93.4	Indoor: Occupants 2, Capacity 800 lbs. restricted to 20' (indoor); 500 lbs. unrestricted (indoor)	Outdoor: Occupants 0, Capacity 0 lbs.	Max Tilt Rating: Indoor side to side 1.5°, Outdoor side to side N/A, Fore and aft 3°	\$30,260
2646ES	GVW: 6035	Dims: (L"xW"xH") 98.5x46x61.6	Indoor: Occupants 2, Capacity 1000 lbs. unrestricted (indoor)	Outdoor: Occupants 2, Capacity 500 lb unrestricted (outdoor)	Max Tilt Rating: Indoor side to side 2°, Outdoor side to side 2°, Fore and aft 3°	\$31,020
3246ES	GVW: 6450	Dims: (L"xW"xH") 98.5x46x61.6	Indoor: Occupants 2, Capacity 1000 lbs. restricted to 26' (indoor); 700 lbs. unrestricted (indoor/outdoor)	Outdoor: Occupants 1, Capacity 700 lbs. unrestricted (outdoor)	Max Tilt Rating: Indoor side to side 2°, Outdoor side to side 2°, Fore and aft 3°	\$39,340

STANDARD FEATURES

PLATFORM SECTION
36 in. (.91 m) Roll-Out Deck Extension
Fold Down Rails with Self-Closing Gate
Lanyard Attach Points
Moveable, Removable Platform Control Box
Nickel Plated Pins
QuikFold Rails (ES1932/ES1932i Only)
USB Charger and Phone Holster (ES1932(i))
CHASSIS SECTION
DC Electric Drive
Fork Lift Pockets, Lift from Side and Rear
Lubrication Free Scissor Arm Bushings
Machine Tie Downs
Manual Descent Pull Cable
Mechanized Pothole Protection
Scissor Maintenance Prop
Slide-Out Battery Trays
Steel Swing Out Doors (ES1932 and ES1932(i))
TIRES
12.7 x 4" Solid Non-Marking Tires (ES1932 and ES1932(i))
16 x 5" Solid Non-Marking Tires (2632ES, 2646ES, 3246ES)
110V-AC Receptacle in Platform
20 Amp Automatic SCR Charger
All Motion Alarm
Four 6V, 220 Amp-Hour Deep Cycle Batteries
Horn
Hourmeter
MISCELLANEOUS
Industry Leading Duty Cycles
Powder-Coated Paint
Proportional Controls
TECHNOLOGY
Automatic Traction Control (ATC)
Battery Condition Indicator
CAN - Enabled Charger
Load Sensing System
Telematics-Ready Harness
Tilt Alarm and Light

INDIVIDUAL OPTIONS

PLATFORM SECTION	
SkySense™ Level I ¹	\$5,190
SkySense™ Level III ¹ (2632ES, 2646ES, 3246ES)	\$5,990
QuikAccess Platform (ES1932 only)	\$650
CHASSIS SECTION	
Lifting Lugs (2632ES, 2646ES, 3246ES)	\$205
ELECTRICAL	
Eagle Battery Charger (110Plug) 108-132Vac 45/65Hz	\$345
Inverter 900W	\$1,320
White Noise Alarm	\$580
Amber Beacon (2632ES, 2646ES, 3246ES)	\$515
Flashing Amber Beacon - LED (ES1932(i) only)	\$95
Dual Flashing Amber Beacons - LED (ES1932(i) only)	\$190
ACCESSORIES	
Electrician Package	\$4,355
Electrician's Tree	\$555
JLG Workstation	\$945
Panel Carrier	\$1,415
Platform Worklights	\$830
Plumber Package	\$7,930
Soft Touch Package (Platform Padding & Prox Switches)	\$4,205
CleanGuard (Only for ES1932(i))	\$500
MISCELLANEOUS	
Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

Note: Throughout 2020, electric drive models will transition to 'ES' at the front of the model designation.

Note: Some options may increase lead time, and some option combinations may not be available.

1. Cannot be used in conjunction with soft touch

The JLG "1 & 5" Warranty & Machine Shipments see page 1
*See page 61 for SkySense details

ALL ELECTRIC AE SERIES

Scissor Lift Price List



AE1932

New Model Coming Fall 2020

AE1932

\$33,000

GVW: 3450 **Dims:** (L"xW"xH") 68.7"x32"x83.2" **Indoor:** Occupants 2, Capacity 606 lbs. **Outdoor:** Occupants 1, Capacity 606 lbs. **Tilt Rating:** Indoor side to side 1.75°, Outdoor side to side 1.5°, Fore and aft 3.75°



KEY SPECS

- **Platform Height:** 19' (5.8 m) indoor/outdoor
- **Platform Capacity:** 606 lb (275 kg) indoor/outdoor - **20% improvement**
- **Charge Time:** 3.5 hours - **3X improvement**
- **Stowed Drive Speed:** 4 mph (5.2 kph) - **2X improvement**

STANDARD FEATURES

PLATFORM SECTION

Platform Cable
Platform Control Box with LED Indicators
QuikFold Rails with Self-Closing Gate
Diamond Tread Steel Deck
Foot-Actuated Deck Extension
Lanyard Attach Points
Nickel Plated Pins

CHASSIS SECTION

Active PHP System
Dynamic Braking
Fork Lift Pockets
Greaseless Kingpin Joints
Maintenance-free AC Drive Motors
Lubrication Free Scissor Arm Bushings
Machine Tie Downs
Manual Descent Cable
Steel Swing-Down Doors

TIRES

12.5 x 4" Solid Non-Marking Tires

ELECTRICAL

Lithium-Ion Battery
Charger Plug (110V)
Battery Charger 650W (Full charge in 3.5 hours)
110V-AC Receptacle in Platform
All Motion Alarm
Horn

MISCELLANEOUS

Proportional Controls
Single Drive/Steer Joystick

TECHNOLOGY

JLG™ Mobile Control
Battery Condition Indicator
Load Sensing System
Tilt Alarm and Light
Variable Tilt Visual Zone Indicator
Wireless Analyzer

INDIVIDUAL OPTIONS

PLATFORM SECTION

Coiled Platform Control Box Cable \$165
SkySense™ Level I Consult Factory
QuikAccess Platform \$650

ELECTRICAL

Flashing Amber Beacon - LED \$85
Dual Flashing Amber Beacons - LED \$190
Inverter \$1,320
Platform Control Box with LCD Display Consult Factory
900W Charger (Full charge in 2.5hrs) Consult Factory
White Noise Backup Alarm \$580

ACCESSORIES

Panel Carrier \$1,415

MISCELLANEOUS

Antivandalism Package \$310
Special Paint Consult Factory

TECHNOLOGY

ClearSky Consult Factory
Operator Access Control Consult Factory

1. Includes Platform and Ground Control Panels W/ Locking Bracket

Note: Some options may increase lead time, and some option combinations may not be available.

The JLG "1 & 5" Warranty & Machine Shipments see page 1

ERT SERIES—ELECTRIC ROUGH TERRAIN Scissor Lift Price List



ERT2669/ERT3369/ERT4069/ERT4769

New Models Coming Fall 2020

Model	GVW:	Dims: (L"xW"xH")	Indoor: Occupants 4, Capacity 1,500 lbs.	Outdoor: Occupants 4, Capacity 1,500 lbs.	Price
ERT2669	8627	139x69.3x96.7			\$51,500
ERT3369	9427	139x69.3x102.9	Capacity 1,000 lbs.	Capacity 1,000 lbs.	\$58,300
ERT4069	10560	139x69.3x103	Capacity 800 lbs.	Capacity 800 lbs.	\$69,000
ERT4769	13636	139x69.3x109.1	Capacity 800 lbs.	Capacity 800 lbs.	\$85,700

STANDARD FEATURES

PLATFORM SECTION
42in Roll-out Deck Extension
Moveable, Removable Platform Console Box
Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
Pin-Less Fold Down Rail System
Platform Control Box with LCD Display, USB Charger and Phone Holster
Self-closing Gate
CHASSIS SECTION
Full Time Traction Control
Lubrication-Free Scissor Arm Bushings
Manual Descent Pull Cable*
Oscillating Front Axle
Scissor Maintenance Prop
Tie Down Lugs
TIRES
26 x 12 Foam Filled Non-marking Tires
ELECTRICAL
110V-AC Receptacle In Platform
23 Amp Automatic, SCR Battery Charger
8 x 6V, 225 Amp-Hour Batteries (ERT2669, ERT3369)
8 x 6V, 310 Amp-Hour Batteries (ERT4069)
8 x 6V, 375 Amp-Hour Batteries (ERT4769)
All Motion Alarm
Descent Alarm
Horn
Hourmeter
MISCELLANEOUS
2WD AC Drive System
Proportional Lift and Drive
TECHNOLOGY
Lift Sense System
Pin-based Load Sensing System
Telematics-Ready Harness
Tilt Display with Lift Sense System

INDIVIDUAL OPTIONS

CHASSIS SECTION	
Hydraulic Leveling Jacks	\$9,450
TIRES	
26 x 12 Foam Filled Lug Tread Tires	(\$1,715)
ELECTRICAL	
8 x 6V, 310 Amp-Hour Batteries (ERT2669, ERT3369)	\$1,500
8 x 6V, 375 Amp-Hour Batteries (ERT4069)	\$750
Dual Flashing Amber Beacons - LED	\$190
Flashing Amber Beacon - LED	\$95
White Noise Backup Alarm	\$580
ACCESSORIES	
JLG CleanGuard	Consult Factory
MISCELLANEOUS	
Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory
Operator Access Control	\$600

MODEL	STANDARD BATTERY OFFERING (AH)	OPTIONAL BATTERY OFFERING (AH)	OPTION PRICE	EXPECTED BATTERY LIFE INCREASE WITH OPTIONAL CONFIGURATION*
ERT2669	225	310	\$1,500	+30%
ERT3369	225	310	\$1,500	+30%
ERT4069	310	375	\$750	+20%
ERT4769	375	N/A	N/A	N/A

*Values are calculated, subject to change at any time without notice and may vary depending on application, machine usage, ambient temperature and other factors

Note: Some options may increase lead time, and some option combinations may not be available.
*ERT4769 Includes a Push-Button Manual Descent System

The JLG "1 & 5" Warranty & Machine Shipments see page 1

RT—ROUGH TERRAIN SCISSORS

Scissor Lift Price List



RT2669/RT3369/RT4069/RT4769

New Models Coming Fall 2020

				Package 3 (4WD Dual Fuel)	Package 4 (4WD Diesel Fuel)
RT2669	GVW: 8627	Dims: (L"xW"xH") 139x69.3x96.7	Indoor: Occupants 4, Capacity 1,500 lbs.	Outdoor: Occupants 4, Capacity 1,500 lbs.	\$54,350
RT3369	GVW: 9427	Dims: (L"xW"xH") 139x69.3x102.9	Indoor: Occupants 4, Capacity 1,000 lbs.	Outdoor: Occupants 2, Capacity 1,000 lbs.	\$61,300
RT4069	GVW: 10560	Dims: (L"xW"xH") 139x69.3x103	Indoor: Occupants 3, Capacity 800 lbs.	Outdoor: Occupants 2, Capacity 800 lbs.	\$73,000
RT4769	GVW: 13636	Dims: (L"xW"xH") 139x69.3x109.1	Indoor: Occupants 3, Capacity 800 lbs.	Outdoor: Occupants 2, Capacity 800 lbs.	\$89,700

2WD Price Adjustment:

(2WD)..... deduct \$3,000

STANDARD FEATURES

PLATFORM SECTION

Pin-Less Fold Down Rail System
Self-closing Gate
Platform Control Box with LCD Display, USB Charger and Phone Holster
42in Roll-out Deck Extension
Nickel Plated Pins, Yellow Zinc-Chromate Palted Fastners

CHASSIS SECTION

Full Time Traction Control
Lubrication-Free Scissor Arm Bushings
Manual Descent Pull Cable*
Scissor Maintenance Prop
Tie Down Lugs
Oscillating Front Axle
Hydraulic Oil Cooler (RT4769 Only)

TIRES

26 x 12 Foam Filled Lug Tread Tires

ELECTRICAL

110V-AC Receptacle In Platform
All Motion Alarm
Horn
Hourmeter

MISCELLANEOUS

Proportional Lift and Drive

TECHNOLOGY

Lift Sense System
Pin-based Load Sensing System
Tilt Display with Lift Sense System
Telematics-Ready Harness

INDIVIDUAL OPTIONS

CHASSIS SECTION

33.5# Alum Propane Tank \$515
Hydraulic Leveling Jacks (Auto Level) \$9,450
Hydraulic Oil Cooler (Excludes RT4769) \$1,690
QuikLevel Advanced \$6,700

TIRES

26 X 12 FF Non Marking Tires \$1,715

ELECTRICAL

Dual Flashing Amber Beacons - LED \$190
Flashing Amber Beacon - LED \$95
White Noise Backup Alarm \$580

MISCELLANEOUS

Special Hydraulic Fluids Consult Factory
Special Paint Consult Factory

TECHNOLOGY

ClearSky™ Consult Factory
Operator Access Control Consult Factory

Note: Some options may increase lead time, and some option combinations may not be available.
*RT4769 Includes a Push-Button Manual Descent System

The JLG "1 & 5" Warranty & Machine Shipments see page 1

330LRT

Package 3 (4WD Dual Fuel) Kubota WG972 31 hp (23.2 kW) Dual Fuel Engine **\$91,360**

GVW: 11820 **Dims:** (L"xW"xH") 154x93x109 **Indoor/Outdoor:** Occupants 6, Capacity 2250 lbs. **Tilt Rating:** 3°

Package 4 (4WD Diesel) Kubota D1305 24 hp (17.9 kW) Tier 4 Final Diesel Engine **\$91,360**

GVW: 11820 **Dims:** (L"xW"xH") 154x93x109 **Indoor/Outdoor:** Occupants 6, Capacity 2250 lbs. **Tilt Rating:** 3°

430LRT

Package 3 (4WD Dual Fuel) Kubota WG972 31 hp (23.2 kW) Dual Fuel Engine **\$100,540**

GVW: 14300 **Dims:** (L"xW"xH") 154x93x118 **Indoor/Outdoor:** Occupants 6, Capacity 1500 lbs. **Tilt Rating:** 3°

Package 4 (4WD Diesel) Kubota D1305 24 hp (17.9 kW) Tier 4 Final Diesel Engine **\$100,540**

GVW: 14300 **Dims:** (L"xW"xH") 154x93x118 **Indoor/Outdoor:** Occupants 6, Capacity 1500 lbs. **Tilt Rating:** 3°

530LRT

Package 3 (4WD Dual Fuel) Kubota WG972 31 hp (23.2 kW) **\$121,200**

GVW: 17000 **Dims:** (L"xW"xH") 192x91x125 **Indoor/Outdoor:** Occupants 6, Capacity 1500 lbs. **Tilt Rating:** 1.5°

Package 4 (4WD Diesel) Kubota D1305 24 hp (17.9 kW) Tier 4 Final Diesel Engine **\$121,200**

GVW: 17000 **Dims:** (L"xW"xH") 192x91x125 **Indoor/Outdoor:** Occupants 6, Capacity 1500 lbs. **Tilt Rating:** 1.5°

STANDARD FEATURES

PLATFORM SECTION
4 ft (1.22 m) Manual Deck Extension
73.5 x 156 in. (1.8 x 3.9 m) All Steel Platform (530LRT)
76 x 154 in. (1.95 x 3.92 m) Platform (330LRT, 430LRT & 530LRT)
Adjustable, Removable Platform Control Station
Fold-Down Handrails with Self-Closing Gate
Steel Platform with Aluminum Deck (330LRT & 430LRT)
CHASSIS SECTION
Leveling Jacks (530LRT)
Manual Descent
TIRES
12 x 16.5 Foam-Filled Tires
ELECTRICAL
110V-AC Receptacle in Platform
All Motion Alarm
Fuel Gauge in Platform
Horn
MISCELLANEOUS
4-Wheel Drive
Automatic Transmission
Three-Speed Drive Select
TECHNOLOGY
Load Sensing System
On-Board Diagnostics at Platform and Ground Control
Telematics-Ready Harness
Tilt Light and Alarm

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (Dual Ext)	\$3,145
Platform (Dual Ext - Megadeck) ²	\$4,855
CHASSIS SECTION	
Hydraulic Leveling Jacks	\$11,300
TIRES	
33/16LL FF Sand Tires (330/430LRT)	\$4,775
12X16.5 FF Non Marking Tires (530LRT)	\$2,895
ELECTRICAL	
Cold Weather Package ¹	\$1,755
4000W 110V 60Hz Generator ²	\$5,170
7500W 60Hz Generator	\$9,420
Amber Beacon	\$515
Ambient White Noise Adjusting Alarm	\$580
ACCESSORIES	
Large Material Rack	\$3,535
Pipe Racks (Rail Mount)	\$960
Platform Worklights	\$850
SkyWelder [®]	Consult Factory
MISCELLANEOUS	
Hydraulic Oil Cooler	\$1,690
Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

Note: Some options may increase lead time, and some option combinations may not be available.
LRT model nomenclature will change in fall of 2020.

1. Includes oil tank immersion heater and battery blanket heater. Diesel includes block heater.
2. 530LRT Only

The JLG "1 & 5" Warranty & Machine Shipments see page 1

Electric Mast Lifts Price List

1230ES

1230ES

\$20,450

Platform Height: 12'

Capacity: 500 lb Indoor Only

Occupants: 1

STANDARD FEATURES

PLATFORM SECTION

All-Steel Platform Deck and Rails
Lanyard Attachment Points
Saloon-Style Entry Gate

MAST

Manual Descent

CHASSIS/BASE

Integrated Lifting and Tie Down Points
Machine Can be Lifted by Forks from Either Side
Steel Swing-Out Battery Doors with Heavy Duty Hinges

ELECTRICAL

20 Amp Automatic Battery Charger
4 x 6V 220 Amp-Hour Deep Cycle Batteries
All Motion Alarm
Controls and Electrical System Common with ES Series Scissor Lift
Horn

Hourmeter

Standard 110V-AC Wiring to Platform

Tilt Light and Alarm

ACCESSORIES

Tool Tray

MISCELLANEOUS

Industry Leading Duty Cycles
Powder-Coated

TECHNOLOGY

Automatic Traction Control
Battery Condition Indicator
Joystick with Proportional Lift and Drive
Mechanical Pothole Protection System
Telematics-Ready Harness

INDIVIDUAL OPTIONS

ACCESSORIES

Amber Beacon \$515

ELECTRICAL

213 A-HR AGM Batteries \$1,285
Inverter (107-127Vac 60Hz-900W) \$1,320

MISCELLANEOUS

Programmable Security Lock \$450
Special Hydraulic Fluids Consult Factory
Special Paint Consult Factory

TECHNOLOGY

Antivandalism Pkg \$445
ClearSky™ Consult Factory

Note: Some options may increase lead time, and some option combinations may not be available.

The JLG "1 & 5" Warranty & Machine Shipments see page 1

20MVL

\$21,510

Platform Height: 19' 1" **Capacity:** 350 lb

Quick-Change Platform Kits — Purchased Separately:

- Narrow 22 in. W x 25 L (.56 x .64 m) \$800
 - Slide Rail Front Entry
- Extension Gull-Wing Front Entry \$1,835
 - 26 in. x 26 in. (.66 x .66 m) — Retracted

STANDARD FEATURES

PLATFORM SECTION
Lanyard Attachment Anchor
Oversized 26 in. W x 28 in. L (.66 x .71 m) Gullwing Front Entry Platform
Pistol-Grip Platform Control
Quick-Change Platform Mounting
MAST
Low Maintenance Anodized Aluminum Mast
CHASSIS/BASE
Built-In Fork Truck Pockets
Heavy Duty Planetary Gear Drive Motors with 5 Times The Life Of Previous Models
Transportation Tie Downs
TIRES/WHEELS
12.62 in. (.32 m) Rear Wheels, 8 in. (.20 m) Front Casters
Non-Marking Tires
ELECTRICAL
110 Volt Double Receptacle in Platform
Automatic Battery Charger
Flashing Amber Beacon
Horn
Hourmeter
Two Sealed 100 AH Maintenance-Free Batteries
MISCELLANEOUS
ANSI, OSHA and CSA Compliant
Key Lock Main Power Switch
TECHNOLOGY
All Motion Alarm
Automatic Pothole Protection System
Automatic Power-Off Battery Saver Control
Battery Discharge Indicators — Platform and Base
Single Joystick Drive and Steer Control — Solid State, Microprocessor Controlled
Telematics-Ready Harness
Tilt Light and Alarm
Variable Speed Elevation Controls

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Narrow Platform (22 X 25)	\$260
Extension Gullwing Front Entry Platform	
· 26 in. x 26 in. (.66 x .66 m) — Retracted	\$1,055
· 26 in. W x 49 in. L (.66 x 1.25 m) — Extended	
CHASSIS/BASE	
Crane Hook	\$195
ACCESSORIES	
Tool Tray	\$195
TECHNOLOGY	
ClearSky™	Consult Factory
Program Security Lock (Fixed)	\$450

Note: Some options may increase lead time, and some option combinations may not be available.

The JLG "1 & 5" Warranty & Machine Shipments see page 1

10MSP

\$21,700

Platform Height: 10' Capacity: 350 lb

STANDARD FEATURES

PLATFORM SECTION
Lanyard Attachment Anchor Point
Platform Gate Operation Interlock
MAST
Lubrication-Free Anodized Aluminum Mast Sections
Maintenance-Free Mast Guide System
CHASSIS/BASE
Heavy Duty Planetary Gear Drive Motors
Proportional Drive
Side and Front Bumpers
Transportation Tie Downs
TIRES/WHEELS
Non-Marking Tires
ELECTRICAL
Automatic Five-Hour Battery Charger
Battery Discharge Indicators — Platform and Base
Horn
Hourmeter
Strobe Lights Front and Rear
ACCESSORIES
Adjustable Height Material Tray
MISCELLANEOUS
Shipping Skid
TECHNOLOGY
Point & Go® One-Hand Drive and Steer System
Programmable Motion Alarm
Simultaneous Lift and Drive Capability
Slope Cut-Out Control Interlock
Stand-On Foot Switch Operation Enable Control

INDIVIDUAL OPTIONS

ACCESSORIES	
Aisle Guide Rollers	\$755
Electric Powered Material Tray	\$2,455
Floor Mat	\$235
MISCELLANEOUS	
Retractable Charger Cord	\$510
TECHNOLOGY	
ClearSky™	Consult Factory
Obstruction Sensor	\$745
Programmable Security Lock	\$450
Remote Manual Descent	\$290

Note: Some options may increase lead time, and some option combinations may not be available.

The JLG "1 & 5" Warranty & Machine Shipments see page 1

20MSP

\$23,070

Platform Height: 19' 5" **Capacity:** 400 lb

Price Adjustments:

Battery Upgrade

- Four 6-Volt 220 amp-hour AGM Batteries
(in lieu of standard 100 amp-hour 12-Volt batteries) \$2,010

Platform Options

- Fold Down Material Tray Platform¹
Tray 25.25 in. x 27.75 in. (65 cm x 70 cm); 150 lb (68 kg) Capacity \$245

1. Platform 23 in. x 27 in. (58 cm x 68 cm).

STANDARD FEATURES

PLATFORM SECTION	
Front and Side Entry Gates	
Lanyard Attachment Anchor	
Single Pistol-Grip Joystick-Drive and Steer	
Stock Picking Platform with Front and Side Entry—Flexible or Fixed Rail Set Up for Platform Access	
MAST	
Low Maintenance Anodized Aluminum Mast	
CHASSIS/BASE	
4 Brush Direct Electric Drive (planetary gear)	
Automatic Pothole Protection System	
Built-In Fork Truck Pockets	
Heavy duty planetary gear drive motor with an estimated 5X the life of previous models.	
Key Lock Main Power Switch	
Transportation Tie Downs	
TIRES/WHEELS	
Non-Marking Tires	
ELECTRICAL	
All Motion Alarm	
Automatic Five-Hour Battery Charger	
Automatic Power-Off Battery Saver Control	
Battery Discharge Indicators—Platform and Base	
Flashing Amber Beacon	
Horn	
Hourmeter	
Tilt Light and Alarm	
Two Sealed 100 amp-hr Maintenance-Free Glass Mat (AGM) Batteries	
ACCESSORIES	
110V AC Double Plug Receptacle	
TECHNOLOGY	
Safety Interlocked Controls	
Variable Speed Elevation Controls	

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (28 X 48) Folding Tray/Kickrail	N/C
Platform (28 X 48) Fixed Siderails	N/C
Platform (27 X 23) Folding Tray/Kickrail	N/C
CHASSIS/BASE	
Crane Hook	\$195
ACCESSORIES	
Program Security Lock (Fixed)	\$450
Tool Tray	\$195
TECHNOLOGY	
ClearSky™	Consult Factory

Note: Some options may increase lead time, and some option combinations may not be available.

The JLG "1 & 5" Warranty & Machine Shipments see page 1

Mast-Style Boom Lift Price List

20E/26E/32E

20E	\$56,010
------------	-----------------

26E	\$68,020
------------	-----------------

32E	\$81,200
------------	-----------------

STANDARD FEATURES**PLATFORM SECTION**

110V-AC Receptacle in Platform

Horn

Proportional Controls

Saloon Gate

TURNTABLE & CHASSIS

345 Degree Non-Continuous Swing

All Motion Alarm

Battery Condition Indicator

Emergency Lowering Pump

Hourmeter

Lifting Eyes

Load Sensing System

Telematics-Ready Harness

Tie Down Lugs

Tilt Light and Alarm

Warning Beacon

INDIVIDUAL OPTIONS**TURNTABLE & CHASSIS**

Batteries, AGM 48V (32E Only)

\$1,560

ACCESSORIES

5/16" Airline

\$700

70W Platform Work Light

\$835

MISCELLANEOUS

Special Paint

Consult Factory

TECHNOLOGY

ClearSky

Consult Factory

Note: Some options may increase lead time, and some option combinations may not be available.

The JLG "1 & 5" Warranty & Machine Shipments see page 1

COMPACT CRAWLER BOOM SERIES



Compact Crawler Booms Price List

X430AJ/X500AJ/X600AJ/
X770AJ/X1000AJ

	ENGINE	BATTERY
X430AJ	\$126,110	\$144,125
	Honda iGX 390 11.7 hp	100Ah 36V Lithium-ion
X500AJ	\$148,910	\$170,105
	Honda iGX 390 11.7 hp	100Ah 48V Lithium-ion
X600AJ	\$171,720	\$209,125
	Honda iGX 390 11.7 hp	100Ah 72V Lithium-ion
X770AJ	\$240,670	\$277,455
	Kubota Diesel D902 21.6 hp	100Ah 76V Lithium-ion
X1000AJ	\$410,270	\$444,860
	Kubota Diesel D902 21.6 hp	150Ah 76V Lithium-ion

STANDARD FEATURES

PLATFORM SECTION

110V AC Receptacle in Platform
58 x 30 in. Removable Aluminum Platform
Air/Water Line to Platform
Electronic Controls with One-Touch Outrigger Deployment
Load Sensing System
Proportional Controls
Removable Controller
SkyGuard®

BOOM

5 ft Articulating Jib

TURNTABLE & CHASSIS

360 Degree Non-Continuous Swing
AC Motor for Indoor Operation
Emergency Lowering Pump
Fork Lift Pockets
Telematics-Ready Harness
Lifting Eyes
Powered Track Widening
Tie Down Lugs

TRACKS

Non-Marking Tracks

MISCELLANEOUS

Synthetic Biodegradable Hydraulic Oil

INDIVIDUAL OPTIONS

ELECTRICAL

Flashing Amber Beacon \$515

Note: Some options may increase lead time, and some option combinations may not be available.

The JLG "1 & 5" Warranty & Machine Shipments see page 1

E300AJP JibPLUS®**\$89,200****STANDARD FEATURES****PLATFORM SECTION**

110V-AC Receptacle in Platform
 180 Degree Hydraulic Platform Rotator
 Load Sensing System
 Platform 30 x 48 in. (.76 x 1.22 m) Side Entry
 SkyGuard SkyLine™

TURNTABLE & CHASSIS

Automatic Traction Control (ATC)
 Battery Condition Indicator
 Brushless AC Motors
 Eight 6V 305 Amp-Hour Deep Cycle Batteries
 Horn
 Hourmeter
 Lifting/Tie Down Lugs
 Overall Chassis Width 4 ft (1.22 m)

ELECTRICAL

All Motion Alarm
 Tilt Light and Alarm

TIRES/WHEELS

25 x 7 x 12 Solid Non-Marking Tires

TECHNOLOGY

Telematics-Ready Harness

INDIVIDUAL OPTIONS**PLATFORM SECTION**

Inward Self-Closing Swing Gate	\$530
Center Storage Tray	\$90
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640

TURNTABLE & CHASSIS

305 A-Hr Batteries (AGM)	\$2,600
375 A-Hr Batteries	\$535

ACCESSORIES

1/2 in. Airline To Platform ¹	\$735
Amber Beacon	\$515
Hostile Environment Package ²	\$3,090

ELECTRICAL

Ambient White Noise Alarm	\$580
Inverter (48V, 1000W) ³	\$4,800

MISCELLANEOUS

Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory

TECHNOLOGY

ClearSky™	Consult Factory
-----------	-----------------

Note: Some options may increase lead time, and some option combinations may not be available.

1. Not Available On E300 AJP

2. Includes Console Cover, Boom Wipers and Cylinder Bellows

3. Not Available On ULEE Rating

The JLG "1 & 5" Warranty & Machine Shipments see page 1

E400AN	\$92,245
E400AJP Narrow	\$101,810

STANDARD FEATURES

PLATFORM SECTION
110V-AC Receptacle in Platform
Fully Proportional Controls
Hydraulic Platform Rotator
Load Sensing System
Platform 30 x 48 in. (.76 x 1.22 m) Drop Bar
SkyGuard SkyLine™
BOOM
4 ft (1.22 m) Vertical and Lateral Articulating Jib
TURNTABLE & CHASSIS
Automatic Traction Control (ATC)
Battery Condition Indicator
Brushless AC Motors
Eight 6V, 370 Amp-Hour Deep Cycle Batteries
Horn
Hourmeter
Lifting/Tie Down Lugs
SCR Automatic Battery Charger
ELECTRICAL
All Motion Alarm
Tilt Light and Alarm
TIRES/WHEELS
22 x 6 x 17.75 Solid Non-Marking (front tire)
25 x 7 x 12 Solid Non-Marking (rear tire)
MISCELLANEOUS
Multiple Function Operation
TECHNOLOGY
Telematics-Ready Harness

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (30 x 60")	N/C
Platform, Drop Bar (30 X 36")	\$1,585
Inward Self-Closing Swing Gate ¹	\$530
Center Storage Tray	\$90
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640
TURNTABLES & CHASSIS	
Batteries (AGM)	\$3,150
ACCESSORIES	
1/2 in. Airline To Platform	\$735
Amber Beacon	\$515
Ambient White Noise Alarm	\$580
Light Package ²	\$2,300
ELECTRICAL	
1200W Inverter	\$4,800
MISCELLANEOUS	
Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

Note: Some options may increase lead time, and some option combinations may not be available.

1. Not available for 30x36" Platform
 2. Includes Platform worklights, head and tail lights & amber beacon.

The JLG "1 & 5" Warranty & Machine Shipments see page 1

E450AJ

\$100,470

STANDARD FEATURES

PLATFORM SECTION

110V-AC Receptacle in Platform
180 Degree Hydraulic Platform Rotator
Fully Proportional Controls
Load Sensing System
Platform 30 x 60 in. (.76 x 1.52 m) Side Entry
SkyGuard SkyLine™

TURNTABLE & CHASSIS

Automatic Traction Control (ATC)
Battery Condition Indicator
Brushless AC Motors
Eight 6V, 370 Amp-Hour Deep Cycle Batteries
Horn
Hourmeter
Lifting/Tie Down Lugs
Overall Chassis Width 5 ft 9 in. (1.75 m)
SCR Automatic Battery Charger

ELECTRICAL

All Motion Alarm
Tilt Light and Alarm

TIRES

240 / 55-17.5 Foam Filled Low Profile All-Terrain Tires

MISCELLANEOUS

Multiple Function Operation

TECHNOLOGY

Telematics-Ready Harness

INDIVIDUAL OPTIONS

PLATFORM SECTION

Platform (30 X 48", 30 X 72")	N/C
Platform, Drop Bar (30 X 36")	\$1,585
Fall Arrest Platform (36 X 72"), Rear Entry ¹	\$10,255
Inward Self-Closing Swing Gate ²	\$530
Center Storage Tray	\$90
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640

TURNTABLES & CHASSIS

Batteries (305 Amp-Hour AGM)	\$3,150
------------------------------	---------

TIRES

26 X 7 X 20 Non Marking Tires	\$1,585
In240/55D17.5 FF Non Marking Tires	\$1,585

ACCESSORIES

1/2 in. Airline To Platform	\$735
Amber Beacon	\$515
Light Package ³	\$2,300
SkySense™ Level I**	\$5,190
SkySense™ Level II**	\$5,990

ELECTRICAL

Ambient White Noise Alarm	\$580
Inverter (1200W)	\$4,800

MISCELLANEOUS

Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory

TECHNOLOGY

ClearSky™	Consult Factory
-----------	-----------------

Note: Some options may increase lead time, and some option combinations may not be available.

1. Requires self-closing gate

2. Not available for 30x36" Platform

3. Includes Platform Lights, Head And Tail Lights And Amber Beacon

The JLG "1 & 5" Warranty & Machine Shipments see page 1

**See page 61 for SkySense details

E600 SERIES Electric Boom Lifts Price List



EC600SJ/EC600SJP
H600SJ/H600SJP

	EC600SJ	EC600SJP
PACKAGE 1 (2WD Electric)	\$163,800	\$169,000
• 8 x 6V, 415 amp-hr Batteries		
PACKAGE 3 (AWD Electric)	\$170,120	\$175,320
• 8 x 6V, 415 amp-hr Batteries		
	H600SJ	H600SJP
PACKAGE 2 (2WD Generator Set)	\$175,705	\$180,905
• 45 Amp, 6 hp Kubota Diesel — Generator Set		
PACKAGE 4 (AWD Generator Set)	\$182,025	\$187,225
• 45 Amp, 6 hp Kubota Diesel — Generator Set		

STANDARD FEATURES

PLATFORM SECTION
110V-AC GFI Receptacle in Platform
180 Degree Hydraulic Platform Rotator
Load Sensing System
Platform 30 x 72 in. (.76 x 1.83 m) Side Entry
Platform Console Machine Status Light Panel*
SkyGuard SkyLine™
BOOM
6 ft (1.83 m) Articulating Jib
6 ft (1.83 m) Vertical and Lateral Articulating Jib (EC600SJP Only)
TURNTABLE & CHASSIS
400 Degree Non-Continuous Rotation
Automatic Traction Control (ATC)
Battery Condition Indicator
Hourmeter
Lifting/Tie Down Lugs
Manual Descent
Oscillating Axle
Removable Battery Box
SCR Automatic Battery Charger
ELECTRICAL
All Motion Alarm
Tilt Light and Alarm
TIRES/WHEELS
14 x 22.5 Non-Marking Foam Filled Tires
TECHNOLOGY
Telematics-Ready Harness

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (30 X 48", 30 X 72")	N/C
Platform (36 x 96") - EC/H600SJ Only	N/C
Tri-Entry Platform with Swing Gate (36 X 72")	\$530
Platform, Drop Bar (30 X 36")	\$1,585
Bolt-On Fall Arrest System (6' Platform) ¹	\$3,430
Fall Arrest Platform (36 X 72"), Rear Entry ¹	\$10,255
Inward Self-Closing Swing Gate ²	\$530
Platform Rail Extension (30 X 48", 30 X 72")	\$1,030
Center Storage Tray	\$90
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640
ACCESSORIES	
Cold Weather Start Kit For Package 4 ³	\$1,885
Light Package ⁴	\$2,300
Hostile Environment Package	\$3,085
SkySense™ Level I**	\$5,190
SkySense™ Level II**	\$5,990
Soft Touch ⁵	\$8,245
Amber Beacon	\$515
ELECTRICAL	
Inverter (110V 1200W)	\$4,800
Ambient White Noise Alarm	\$580
MISCELLANEOUS	
Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

Note: Some options may increase lead time, and some option combinations may not be available.

* Provides indicator lights at platform control console for system distress, low fuel, 5 degree tilt light, and foot switch status.

1. Requires self-closing gate

2. Not available for 30x36" Platform

3. Includes Battery Blanket, Hydraulic Tank Heater, Engine Block Heater Pad

4. Includes Platform Work Lights, Head And Tail Lights, Amber Beacon

5. Cannot be used in conjunction with SkySense

The JLG "1 & 5" Warranty & Machine Shipments see page 1

**See page 61 for SkySense details

H340AJ Electric & Hybrid Boom Lifts Price List



H340AJ

H340AJ

PACKAGE 4 (4WD Hybrid)

\$111,260

- Kubota Z482 11.1 hp / 8 x 12V, 100-amp hour AGM Batteries

STANDARD FEATURES

PLATFORM SECTION	
110V-AC Receptacle in Platform	
12V-DC Auxiliary Power	
180 Degree Hydraulic Platform Rotator	
Cast Aluminum Control Box	
Control ADE* System	
Load Sensing System	
Platform 30 x 60 in. (.76 x 1.22 m) Side Entry	
Platform Console Machine Status Light Panel*	
Proportional Controls	
SkyGuard SkyLine™	
BOOM	
4 ft (1.22 m) Articulating Jib	
TURNTABLE & CHASSIS	
355 Degree Non-Continuous Swing	
Electric AC Drive	
Glow Plugs (diesel engines)	
Gull-Wing Steel Turntable Hoods	
Horn	
Hourmeter	
Lifting/Tie Down Lugs	
Oscillating Axle	
Swing-Out Engine Tray	
ELECTRICAL	
All Motion Alarm	
Tilt Light and Alarm	
TECHNOLOGY	
Telematics-Ready Harness	

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (30 X 48", 30 X 60")	N/C
Platform, Drop Bar (30 X 36")	\$1,585
Inward Self-Closing Swing Gate ¹	\$530
Platform Rail Extension (30 X 60")	\$1,030
Center Storage Tray	\$90
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640
TIRES	
7 X 18 Solid Tires	\$1,585
7 X 18 Solid, Non Marking Tires	\$2,110
9 X 20 Foam, Non Marking Tires	\$2,580
ACCESSORIES	
1/2 In Airline To Platform	\$735
Amber Beacon	\$515
Cold Weather Package ²	\$1,755
Hostile Environment Package ³	\$3,085
Hot Weather Package	\$395
Light Package ⁴	\$2,300
ELECTRICAL	
Inverter (110V 1200W)	\$4,800
Ambient White Noise Alarm	\$580
MISCELLANEOUS	
Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

Note: Some options may increase lead time, and some option combinations may not be available.

* Provides indicator lights at platform control console for system distress, low fuel, 5 degree tilt light, and foot switch status.

1. Not available for 30x36" Platform

2. Includes Battery Blanket, Hydraulic Tank Heater, Engine Block Heater Pad

3. Includes Console Cover, Boom Wipers And Cylinder Bellows

4. Includes platform lights, head and tail lights and amber beacon

The JLG "1 & 5" Warranty & Machine Shipments see page 1

H800AJ Electric & Hybrid Boom Lifts Price List



H800AJ

H800AJ

\$333,100

PACKAGE 4 (4WD Hybrid)

- Kubota 25 hp (18.6 kW) Tier 4 Final Diesel

STANDARD FEATURES

PLATFORM SECTION	
110V-AC Receptacle in Platform	
12V-DC Auxiliary Power	
180 Degree Hydraulic Platform Rotator	
Control ADE™ System	
Load Sensing System	
Platform 36 x 96 in. (.91 x 2.44 m) Side Entry	
Platform Console Machine Status Light Panel*	
Proportional Controls	
SkyGuard SkyLine™	
BOOM	
6 ft (1.83 m) Articulating Jib	
TURNTABLE & CHASSIS	
Automatic Engine Start/Stop	
Glow Plugs	
Gull-Wing Engine Hood	
Horn	
Hourmeter	
Hydrostatic Drive	
Lifting/Tie Down Lugs	
Oscillating Axle	
Swing-Out Engine Tray	
ELECTRICAL	
All Motion Alarm	
Tilt Light and Alarm	
TIRES	
Rim Protector Foam Filled Lug Tread Tires	
MISCELLANEOUS	
Hybrid- or Electric-Only Mode	
TECHNOLOGY	
Telematics-Ready Harness	

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (30 X 48", 30 X 72", 36 X 72", 36 X 96")	N/C
Platform, Drop Bar (30 X 36")	\$1,585
Fall Arrest Platform (36 X 96"), Rear Entry ¹	\$10,255
Inward Self-Closing Swing Gate ²	\$530
Platform Rail Extension (36 X 72", 36 X 96")	\$1,030
Center Storage Tray	\$90
Mesh to Top Rail (36 X 96")	\$1,290
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640
TURNTABLE & CHASSIS	
Tow Bar	\$4,110
TIRES	
18-625 FF Tires	\$2,110
18-625 Non Marking FF Tires	\$5,275
ACCESSORIES	
1/2 In Airline To Platform	\$735
SkyPower Package ³	\$9,420
SkyWelder™ Package ⁴	\$5,265
Amber Beacon	\$515
Cold Weather Pkg ⁵	\$1,755
Hostile Environment Package ⁶	\$3,085
Light Package ⁷	\$2,300
SkyGlazier ⁸	\$1,875
SkySense™ Level I**	\$5,190
SkySense™ Level II**	\$5,990
Soft Touch ⁹	\$8,245
Welder Ready Package ¹⁰	\$610
MISCELLANEOUS	
Dual Plug charging Kit - 120V	\$385
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

Note: Some options may increase lead time, and some option combinations may not be available.

* Provides indicator lights at platform control console for system distress, low fuel, 5 degree tilt light, and foot switch status.

- Requires self-closing gate
- Not available for 30x36" Platform
- Includes 7500W Generator, Power Cable To Platform
- Includes 280 amp Miller™ welder in the platform, leads, clamp, stinger and fire extinguisher. SkyPower purchased separately.
- Includes Battery Blanket, Hydraulic Tank Heater, Engine Block Heater Pad
- Includes Console Cover, Boom Wipers And Cylinder Bellows
- Includes Platform Lights, Head And Tail Lights And Amber Beacon
- Includes glass and tray panel with strap, 250 lb capacity (A/S models)
- Cannot be used in conjunction with SkySense
- Includes fire extinguisher and welder bracket

The JLG "1 & 5" Warranty & Machine Shipments see page 1

**See page 61 for SkySense details

340AJ Articulating Boom Lifts Price List

340AJ

340AJ

PACKAGE 3 (4WD Dual Fuel)

\$98,080

- PSI/GM L4-EFI 28.7 hp (21.4 kW) Dual Fuel Engine

PACKAGE 4 (4WD Diesel)

\$98,080

- Kubota D1105 24.8 hp (18.5 kW) Diesel Engine

STANDARD FEATURES

PLATFORM SECTION	
110V-AC Receptacle in Platform	
12V-DC Auxiliary Power	
180 Degree Hydraulic Platform Rotator	
Cast Aluminum Control Box	
Control ADE [®] System	
Load Sensing System	
Platform 30 x 60 in (.76 x 1.22 m) Side Entry	
Platform Console Machine Status Light Panel*	
Proportional Control	
SkyGuard SkyLine™	
BOOM	
4 ft (1.22 m) Articulating Jib	
TURNTABLE & CHASSIS	
355 Degree Non-Continuous Swing	
Glow Plugs (DIESEL)	
Gull-Wing Steel Turntable Hoods	
Horn	
Hourmeter	
Hydrostatic Drive	
Lifting/Tie Down Lugs	
Oscillating Axle	
Swing-Out Engine Tray	
ELECTRICAL	
All Motion Alarm	
Tilt Light and Alarm	
TIRES	
Lug Tread Foam Filled Tires	
TECHNOLOGY	
Telematics-Ready Harness	

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (30 X 48")	N/C
Platform, Drop Bar (30 X 36")	\$1,585
Inward Self-Closing Swing Gate ¹	\$530
Platform Rail Extension (30 X 36")	\$1,030
Center Storage Tray	\$90
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640
TURNTABLE & CHASSIS	
3500W Generator (110V/60Hz, 110V GFI)	\$4,020
43.5 Lb (19.7 Kg) Propane Tank	\$580
Battery Disconnect	\$515
TIRES	
7 X 18 Solid Tires	\$1,585
7 X 18 Solid, Non Marking Tires	\$2,110
9 X 20 Foam, Non Marking Tires	\$2,580
Turf/Sand 33 X 12 FF Tires	\$3,165
ACCESSORIES	
1/2 in Airline To Platform	\$735
Amber Beacon	\$515
Arctic Package (Diesel) ²	\$4,370
Cold Weather Package (Diesel) ³	\$1,755
Hostile Environment Package ⁴	\$3,085
Light Package ⁵	\$2,300
ELECTRICAL	
White Noise Alarm	\$580
MISCELLANEOUS	
Special Paint	Consult Factory
Special Hydraulic Fluids	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

Note: Some options may increase lead time, and some option combinations may not be available.

The JLG "1 & 5" Warranty & Machine Shipments see page 1

* Provides indicator lights at platform control console for system distress, low fuel, 5 degree tilt light, and foot switch status.

1. Not available for 30x36 Platform

2. Includes Arctic Hydraulic Hoses (Drive And Steer Only) And Main Boom Cable, Extreme Cold Engine Oil, Fuel Conditioner, Engine Block Heater, Battery Blanket, Glow Plugs, Hydraulic Tank Heater, Oversized Footswitch And Arctic Hydraulic Oil

3. Includes Battery Blanket, Hydraulic Tank Heater, And Block Heater

4. Includes Console Cover, Boom Wipers And Cylinder Bellows

5. Includes Platform Lights, Head And Tail Lights And Amber Beacon

450 SERIES Articulating Boom Lifts Price List



450A/450AJ

	450A	450AJ
PACKAGE 1 (2WD Dual Fuel)	\$124,680	\$126,265
• Kubota WG2503 61 hp (45.5 kW) Dual Fuel Engine		
PACKAGE 2 (2WD Diesel)	\$124,680	\$126,265
• Deutz D2.9L4 48.8 hp (36.4 kW) Tier 4 Final		
PACKAGE 3 (4WD Dual Fuel)	\$127,845	\$129,430
• Kubota WG2503 61 hp (45.5 kW) Dual Fuel Engine		
PACKAGE 4 (4WD Diesel)	\$127,845	\$129,430
• Deutz D2.9L4 48.8 hp (36.4 kW) Tier 4 Final		

STANDARD FEATURES

PLATFORM SECTION
110V-AC Receptacle in Platform
12V-DC Auxiliary Power
180 Degree Hydraulic Platform Rotator
Cast Aluminum Control Box
Control ADE™ System
Load Sensing System
Platform 30 x 72 in. (.76 x 1.83 m) Side Entry
Platform Console Machine Status Light Panel*
Proportional Controls
SkyGuard SkyLine™
BOOM
4 ft (1.22 m) Articulating Jib (450AJ only)
TURNTABLE & CHASSIS
Glow Plugs (Diesel Engines)
Gull-Wing Turntable Hoods
Horn
Hydrostatic Drive
Interactive Multi-Digital Indicator with Diagnostic Trouble Codes
Lifting/Tie Down Lugs
Oscillating Axle
Swing-Out Engine Tray
ELECTRICAL
All Motion Alarm
Tilt Light and Alarm
TIRES
Super Wide Foam Filled Tires
TECHNOLOGY
Telematics-Ready Harness

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (30 X 48", 30 X 60", 30 X 72")	N/C
Platform, Drop Bar (30 X 36")	\$1,585
Inward Self-Closing Swing Gate ¹	\$530
Fall Arrest Platform (450A - 36 X 72"; 450AJ - 30 X 60"), Rear Entry ²	\$10,255
Platform Rail Extension (30 X 72")	\$1,030
Center Storage Tray	\$90
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640
TURNTABLE & CHASSIS	
2500W 60Hz Generator	\$4,240
43.5 Lb (19.7 Kg) Propane Tank	\$580
Battery Disconnect	\$515
Hydraulic Oil Cooler	\$2,500
Tow Bar	\$6,965
TIRES	
12 X 16.5 FF Tires	N/C
12 X 16.5 FF Non Marking Tires	\$1,585
33X12-20 Low Profile Solid Non Marking Tires	\$1,585
In315/55D20 Low Profile FF Tires	N/C
In315/55D20 Low Profile FF Non Mark Tires	\$1,585
ACCESSORIES	
1/2 In Airline To Platform	\$735
Amber Beacon	\$515
Arctic Package ³	\$5,090
Cold Weather Package ⁴	\$1,755
Cold Weather Package (110V) W/Transformer	\$2,625
Hostile Environment Package ⁵	\$3,085
Light Package ⁶	\$2,300
SkyGlazier ⁷	\$1,875
SkyPower Package ⁸	\$9,420
SkyWelder Package ⁹	\$5,265
SkySense™ Level I**	\$5,190
SkySense™ Level II**	\$5,990
Welder Ready Package ¹⁰	\$610
ELECTRICAL	
White Noise Alarm	\$580
MISCELLANEOUS	
Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

Note: Some options may increase lead time, and some option combinations may not be available.

* Provides indicator lights at platform control console for system distress, low fuel, 5 degree tilt light, and foot switch status.

1. Not available for 30x36" Platform

2. Requires self-closing gate

3. Includes Arctic Hydraulic Hoses (Drive And Steer Only) And Main Boom Cable, Extreme Cold Engine Oil, Fuel Conditioner, Engine Block Heater, Battery Blanket, Glow Plugs, Hydraulic Tank Heater, Oversized Footswitch And Arctic Hydraulic Oil

4. Includes Battery Blanket, Hydraulic Tank Heater, And Block Heater

5. Includes Console Cover, Boom Wipers And Cylinder Bellows

6. Includes Platform Lights, Head And Tail Lights And Amber Beacon

7. Includes glass and tray panel with strap, 250 lb capacity (A/S models)

8. Includes 7500W Generator, Power Cable To Platform

9. Includes 280 amp Miller™ welder in the platform, leads, clamp, stinger and fire extinguisher. SkyPower purchased separately.

10. Includes fire extinguisher and welder bracket

The JLG "1 & 5" Warranty & Machine Shipments see page 1

**See page 61 for SkySense details

600 SERIES Articulating Boom Lifts Price List



600AJ

600AJ

PACKAGE 1 (2WD Dual Fuel)

\$182,335

- Ford MSG425-DF 84 hp (62.6 kW) Dual Fuel Engine

PACKAGE 2 (2WD Diesel)

\$182,335

- Deutz D2.9L4 49 hp (36.4 kW) Tier 4 Final

PACKAGE 3 (4WD Dual Fuel)

\$197,380

- Ford MSG425-DF 84 hp (62.6 kW) Dual Fuel Engine

PACKAGE 4 (4WD Diesel)

\$197,380

- Deutz D2.9L4 49 hp (36.4 kW) Tier 4 Final

Package 1 & 2 Price Adjustments:

Narrow Chassis with 4-Wheel Steer* (2WD, 4WS) add \$24,070

*Includes solid segmented tires. Not available with fall arrest.

Package 3 & 4 Price Adjustments:

4-Wheel Steer add \$7,640

STANDARD FEATURES

PLATFORM SECTION	
110V-AC Receptacle in Platform	
12V-DC Auxiliary Power	
180 Degree Hydraulic Platform Rotator	
Control ADE™ System	
Load Sensing System	
Platform 36 x 96 in. (.91 x 2.44 m) Side Entry	
Platform Console Machine Status Light Panel*	
Proportional Controls	
SkyGuard SkyLine™	
BOOM	
6 ft (1.83 m) Articulating Jib (600AJ only)	
TURNABLE & CHASSIS	
Glow Plugs (diesel engines)	
Gull-Wing Hoods	
Horn/Oscillating Axle	
Hourmeter	
Lifting/Tie Down Lugs	
Swing-Out Engine Tray	
Oscillating Axle	
ELECTRICAL	
All Motion Alarm	
Tilt Light and Alarm, Function Cutout	
TIRES	
IN355/55D-6.25 Low Profile Foam Filled Tires	
TECHNOLOGY	
Telematics-Ready Harness	

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (30 X 48", 30 X 60", 36 X 72", 36 X 96")	N/C
Platform, Drop Bar (30 X 36")	\$1,585
Tri-Entry Platform with Swing Gate (36 X 72" or 36 X 96")	\$530
Bolt-On Fall Arrest System (6' or 8' Platform) ¹	\$3,430
Fall Arrest Platform (36 X 96"), Rear Entry ¹	\$10,255
Inward Self-Closing Swing Gate ²	\$530
Platform Rail Extension (36 X 72", 36 X 96")	\$1030
Center Storage Tray	\$90
Mesh to Top Rail (36 X 96")	\$1,290
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640
TURNABLE & CHASSIS	
2500W 110V 60Hz Generator	\$4,240
4000W 60Hz Generator	\$5,170
43.5 Lb (19.7 Kg) Propane Tank	\$580
Battery Disconnect	\$515
Deutz TD2.9L4 67 hp (50 kW) Tier 4 Final	\$7,055
Intake Air Shut Off Valve	\$4,430
Oil Cooler	\$2,500
Tow Bar - 2WS/4WS	\$4,600/\$12,240
TIRES	
14 (In355) X 17.5 (55D625) FF Non Marking Tires	\$2,640
Solid Non Marking Tires	\$5,805
Solid Tires	N/C
ACCESSORIES	
1/2 in Airline To Platform	\$735
Arctic Package ³	\$5,170
Center Storage Tray	\$90
Cold Weather Package ⁴	\$1,755
Hostile Environment Package ⁵	\$3,085
Light Package ⁶	\$2,300
SkyGlazier ⁷	\$1,875
SkyPower Package ⁸	\$9,420
SkyWelder Package ⁹	\$5,265
SkySense™ Level I**	\$5,190
SkySense™ Level II**	\$5,990
Soft Touch ¹⁰	\$8,245
Welder Ready Package ¹¹	\$610
ELECTRICAL	
Ambient White Noise Alarm	\$580
Amber Beacon	\$515
MISCELLANEOUS	
Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

Note: Some options may increase lead time, and some option combinations may not be available.

* Provides indicator lights at platform control console for system distress, low fuel, 5 degree tilt light, and foot switch status.

- Requires self-closing gate
- Not available for 30x36" Platform
- Includes Arctic Hydraulic Hoses (Drive, Steer), Main Boom Cable, Extreme Cold Engine Oil, Fuel Conditioner, Engine Block Heater, Battery Blanket, Glow Plugs, Hydraulic Tank Heater, Oversized Footswitch And Arctic Hydraulic Oil
- Includes Battery Blanket, Hydraulic Tank Heater, Block Heater
- Includes Boom Wipers, Cylinder Bellows And Console Cover
- Includes Platform Work Lights, Head And Tail Lights, Amber Beacon
- Includes glass and tray panel with strap, 250 lb capacity (A/S models)
- Includes 7500W Generator, Power Cable To Platform
- Includes 280 amp Miller™ welder in the platform, leads, clamp, stinger and fire extinguisher. SkyPower purchased separately.
- Cannot be used in conjunction with SkySense
- Includes Fire Extinguisher And Welder Bracket

The JLG "1 & 5" Warranty & Machine Shipments see page 1

**See page 61 for SkySense details

PACKAGE 1 (2WD Dual Fuel) \$269,065

- Ford MSG425-DF 84 hp (62.6 kW) Dual Fuel Engine

PACKAGE 2 (2WD Diesel) \$269,065

- Deutz TD2.9L4 67 hp (50 kW) Tier 4 Final

PACKAGE 3 (4WD Dual Fuel) \$283,985

- Ford MSG425-DF 84 hp (62.6 kW) Dual Fuel Engine

PACKAGE 4 (4WD Diesel) \$283,985

- Deutz TD2.9L4 67 hp (50 kW) Tier 4 Final

Package 3 & 4 Price Adjustments:

4-Wheel Steer add \$9,430

STANDARD FEATURES

PLATFORM SECTION
110V-AC Receptacle in Platform
12V-DC Auxiliary Power
180 Degree Hydraulic Platform Rotator
Control ADE™ System
Load Sensing System
Platform 36 x 96 in. (.91 x 2.44 m) Side Entry
Platform Console Machine Status Light Panel*
Proportional Controls
SkyGuard SkyLine™
BOOM
6 ft (1.83 m) Articulating Jib
TURNTABLE & CHASSIS
Glow Plugs (diesel engines)
Gull-Wing Hoods
Horn/Oscillating Axle
Hourmeter
Hydrostatic Drive
Lifting/Tie Down Lugs
Swing-Out Engine Tray
ELECTRICAL
All Motion Alarm
Tilt Light and Alarm
TIRES
Rim Protector Foam Filled Lug Tread Tires
TECHNOLOGY
Telematics-Ready Harness

Note: Some options may increase lead time, and some option combinations may not be available.

* Provides indicator lights at platform control console for system distress, low fuel, 5 degree tilt light, and foot switch status.

1. Not available for 30x36" Platform

2. Requires self-closing gate

3. Includes Arctic Hydraulic Hoses (Drive, Steer), Main Boom Cable, Extreme Cold Engine Oil, Fuel Conditioner, Engine Block Heater, Battery Blanket, Glow Plugs, Hydraulic Tank Heater, Oversized Footswitch And Arctic Hydraulic Oil

4. Includes Battery Blanket, Hydraulic Tank Heater, Block Heater

5. Includes Boom Wipers, Cylinder Bellows And Console Cover

6. Includes Platform Work Lights, Head And Tail Lights, Amber Beacon

7. Includes glass and tray panel with strap, 250 lb capacity (A/S models)

8. Includes 7500W Generator, Power Cable To Platform

9. Includes 280 amp Miller™ welder in the platform, leads, clamp, stinger and fire extinguisher. SkyPower purchased separately.

10. Cannot be used in conjunction with SkySense

11. Includes Fire Extinguisher And Welder Bracket

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (30 X 48", 30 X 60", 36 X 72", 36 X 96")	N/C
Tri-Entry Platform with Swing Gate (36 X 72" or 36 X 96")	\$530
Platform, Drop Bar (30 X 36")	\$1,585
Inward Self-Closing Swing Gate ¹	\$530
Bolt-On Fall Arrest System (6' or 8' Platform) ²	\$3,430
Fall Arrest Platform (36 X 96"), Rear Entry ²	\$10,255
Platform Rail Extensions (36 X 72", 36 X 96")	\$1,030
Center Storage Tray	\$90
Mesh to Top Rail (36 X 96")	\$1,290
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640
TURNTABLE & CHASSIS	
2500W 110V 60Hz Generator	\$4,240
4000W 60Hz Generator	\$5,170
43.5 Lb (19.7 Kg) Propane Tank	\$580
Battery Disconnect	\$515
Engine Tray Jack	\$685
Hydraulic Oil Cooler	\$2,500
Intake Air Shut Off Valve	\$4,430
Tow Bar	\$4,110
TIRES	
18-625 FF Non Marking Tires	\$5,275
41/18LL X 22.5 FF Sand/Turf Tire	\$15,300
ACCESSORIES	
1/2 In Airline To Platform	\$735
Arctic Package ³	\$6,550
Cold Weather Package ⁴	\$1,755
Hostile Environment Package ⁵	\$3,085
Light Package ⁶	\$2,300
SkyGlazier ⁷	\$1,875
SkyPower Package ⁸	\$9,420
SkyWelder Package ⁹	\$5,265
SkySense™ Level I**	\$5,190
SkySense™ Level II**	\$5,990
Soft Touch ¹⁰	\$8,245
Welder Ready Package ¹¹	\$610
ELECTRICAL	
Amber Beacon	\$515
MISCELLANEOUS	
Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

The JLG "1 & 5" Warranty & Machine Shipments see page 1

**See page 61 for SkySense details

ULTRA SERIES Articulating Boom Lifts Price List



1250AJP/1500AJP

1250AJP (4WD 4WS Diesel) \$410,040

- Deutz TCD2.9L4 74.2 hp (55.4 kW) Tier 4 Final

1500AJP (4WD 4WS Diesel) \$596,080

- Deutz TCD3.6L 99.8 hp (74.4 kW) Tier 4 Final

STANDARD FEATURES

PLATFORM SECTION
12V-DC Auxiliary Power
180° Hydraulic Platform Rotator
3 Selectable Steering Modes
AC Receptacle in Platform
Control ADE ⁺ System
Control Console
LCD Panel at Operator's Platform (1500AJP only)
Load Sensing System
Platform 36 x 96 in. (.91 x 2.44 m) Side Entry
Platform Console Machine Status Light Panel*
Proportional Controls
Selectable Capacity Envelope
SkyGuard SkyLine™
TURNTABLE & CHASSIS
Drive-Out Extendable Axles
Engine Distress Warning/Shutdown—Selectable via JLG Analyzer
Full-Time 4WD and 4WS
Glow Plugs
Gull-Wing Hoods
Hourmeter
Lifting/Tie Down Lugs
Oscillating Axle (1250AJP)
Swing-Out Engine Tray
ELECTRICAL
All Motion Alarm
Tilt Light and Alarm
TIRES
445/50D710 Foam-Filled Rim Protector Lug Tread Tires
TECHNOLOGY
Telematics-Ready Harness

Note: Some options may increase lead time, and some option combinations may not be available.

* Provides indicator lights at platform control console for system distress, low fuel, 5 degree tilt light, and foot switch status.

1. Not available for 30x36" Platform
2. Requires self-closing gate
3. Includes Battery Blanket, Hydraulic Tank Heater, Block Heater
4. Includes Extreme Cold Engine Oil, Fuel Conditioner, Engine Block Heater, Battery Blanket, Glow Plugs, Hydraulic Tank Heater, Oversized Footswitch And Arctic Hydraulic Oil
5. Includes Console Cover, Boom Wipers And Cylinder Bellows
6. Includes Platform Lights, Head And Tail Lights And Amber Beacon
7. Includes glass and tray panel with strap, 250 lb capacity (A/S models)
8. Includes 7500W Generator, Power Cable To Platform
9. Includes 280 amp Miller™ welder in the platform, leads, clamp, stinger and fire extinguisher. SkyPower purchased separately.
10. 1250AJP Only. Cannot Be Used in Conjunction with SkySense
11. Includes fire extinguisher and welder bracket

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (30 X 48", 36 X 72", 36 X 96")	N/C
Tri-Entry Platform with Swing Gate (36 X 72" or 36 X 96")	\$530
Platform, Drop Bar (30 X 36")	\$1,585
Inward Self-Closing Swing Gate ¹	\$530
Bolt-On Fall Arrest System (6' or 8' Platform) ²	\$3,430
Fall Arrest Platform (36 X 96"), Rear Entry ²	\$10,255
Platform Rail Extensions (36 X 72", 36 X 96")	\$1,030
Center Storage Tray	\$90
Mesh to Top Rail (36 X 96")	\$1,290
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640
TURNTABLE & CHASSIS	
Battery Disconnect	\$515
Intake Air Shut Off Valve	\$4,430
Oil Cooler	\$2,500
TIRES	
445/65-24 Solid Tires	\$12,200
445/65-24 Solid Non-Mark Tires	\$18,885
ACCESSORIES	
1/2 in. Airline To Platform	\$735
110V Cold Weather Pkg ³	\$1,755
Amber Beacon	\$515
Cold Weather Plus ⁴	\$6,830
Hostile Environment Package ⁵	\$3,085
Light Package ⁶	\$2,300
SkyGlazier ⁷	\$1,875
SkyPower Package ⁸	\$9,420
SkyWelder Package ⁹	\$5,265
SkySense™ Level I**	\$5,190
SkySense™ Level II**	\$5,990
Soft Touch ¹⁰	\$8,245
Welder Ready Package ¹¹	\$610
ELECTRICAL	
Ambient White Noise Alarm	\$580
MISCELLANEOUS	
Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

The JLG "1 & 5" Warranty & Machine Shipments see page 1

**See page 61 for SkySense details

400 SERIES Telescopic Boom Lifts Price List

400S/460SJ & 400S HC3/460SJ HC3

	400S	400S HC3	460SJ	460SJ HC3
PACKAGE 1 (2WD Dual Fuel)	\$128,480	\$138,760	\$139,085	\$150,220
• Kubota WG2503 61 hp (45.5 kW) Dual Fuel Engine				
PACKAGE 2 (2WD Diesel)	\$128,480	\$138,760	\$139,085	\$150,220
• Deutz D2.9L4 48.8 hp (36.4 kW) Tier 4 Final				
PACKAGE 3 (4WD Dual Fuel)	\$131,645	\$142,180	\$142,250	\$153,640
• Kubota WG2503 61 hp (45.5 kW) Dual Fuel Engine				
PACKAGE 4 (4WD Diesel)	\$131,645	\$142,180	\$142,250	\$153,640
• Deutz D2.9L4 48.8 hp (36.4 kW) Tier 4 Final				

STANDARD FEATURES

BOOM
6 ft (1.83 m) Articulating Jib (460SJ only)
PLATFORM
110V-AC Receptacle in Platform
12V-DC Auxiliary Power
180 Degree Hydraulic Platform Rotator
Control ADE™ System
Load Sensing System
Platform 36 x 96 in. (.91 x 2.44 m) Side Entry
Platform Console Machine Status Light Panel*
Proportional Controls
SkyGuard SkyLine™
TURNTABLE & CHASSIS
Glow Plugs (diesel engines)
Horn
Interactive Multi-Digital Indicator with Diagnostic Trouble Codes
Lifting/Tie Down Lugs
Oscillating Axle
Swing-Out Engine Tray
ELECTRICAL
All Motion Alarm
Tilt Light and Alarm
TIRES
12 x 16.5 Rim Protector Foam Filled Lug Tread Tires (Non-HC3 Models)
33 X 12 Foam Filled Tires (HC3 Models)
TECHNOLOGY
Telematics-Ready Harness

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (30 X 60", 36 X 72", 36 X 96")	N/C
Tri-Entry Platform with Swing Gate (36 X 72" or 36 X 96")	\$530
Platform, Drop Bar (30 X 36")	\$1,585
Inward Self-Closing Swing Gate ¹	\$530
Bolt-On Fall Arrest System (6' or 8' Platform) ²	\$3,430
Fall Arrest Platform (36 X 72"), Rear Entry ²	\$10,255
Platform Rail Extensions (36 X 72", 36 X 96")	\$1,030
Center Storage Tray	\$90
Mesh to Top Rail (36 X 96")	\$1,290
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640
TURNTABLE & CHASSIS	
2500W 60Hz Generator	\$4,240
Intake Air Shut Off Valve	\$4,430
Battery Disconnect	\$515
Oil Cooler	\$2,500
Tow Bar	\$4,885
Steel Hoods	\$1,845
TIRES	
12 X 16.5 FF Non-Mark Tires	\$2,110
14 X 17.5 FF Tires	\$2,640
ACCESSORIES	
1/2 in. Airline To Platform	\$735
Amber Beacon	\$515
Arctic Package ³	\$5,170
Cold Weather Package ⁴	\$1,755
Hostile Environment Package ⁵	\$3,085
Light Package ⁶	\$2,300
SkyGlazier ⁷	\$1,875
SkyPower Package	\$9,420
SkyWelder Package ⁸	\$5,265
SkySense™ Level I**	\$5,190
SkySense™ Level II**	\$5,990
Welder Ready Package ⁹	\$610
MISCELLANEOUS	
Remote Bearing Lube	\$175
Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

Note: Some options may increase lead time, and some option combinations may not be available.

* Provides indicator lights at platform control console for system distress, low fuel, 5 degree tilt light, and foot switch status.

1. Not available for 30x36" Platform

2. Requires self-closing gate

3. Includes Arctic Hydraulic Hoses (Drive, Steer), Main Boom Cable, Extreme Cold Engine Oil, Fuel Conditioner, Engine Block Heater, Battery Blanket, Glow Plugs, Hydraulic Tank Heater, Oversized Footswitch And Arctic Hydraulic Oil

4. Includes Battery Blanket, Hydraulic Tank Heater, Block Heater

5. Includes Boom Wipers, Cylinder Bellows And Console Cover

6. Includes Platform Work Lights, Head And Tail Lights, Amber Beacon

7. Includes glass and tray panel with strap, 250 lb capacity (A/S models)

8. Includes 280 amp Miller™ welder in the platform, leads, clamp, stinger and fire extinguisher. SkyPower purchased separately.

9. Includes Fire Extinguisher And Welder Bracket

The JLG "1 & 5" Warranty & Machine Shipments see page 1

**See page 61 for SkySense details

400 CRAWLER SERIES Telescopic Boom Lifts Price List



400SC/460SJC

	400SC	460SJC
PACKAGE 2 (Crawler Diesel)	\$178,830	\$192,825
• Deutz D2.9L4 48.8 hp (36.4 kW) Tier 4 Final		

Package Price Adjustments:

Steel Tracks ILOS	N/C
Steel Tracks with Rubber Pucks	\$2,595
Non-Marking Rubber Tracks ILOS	\$740

STANDARD FEATURES

PLATFORM SECTION	
110V-AC Receptacle in Platform	
12V-DC Auxiliary Power	
180 Degree Hydraulic Platform Rotator	
Control ADE ¹ System	
Load Sensing System	
Platform 36 x 96 in. (.91 x 2.44 m) Side Entry	
Platform Console Machine Status Light Panel*	
Proportional Controls	
SkyGuard SkyLine™	
BOOM	
6 ft (1.83 m) Articulating Jib (460SJC only)	
TURNTABLE & CHASSIS	
Dura Tough Hoods	
Glow Plugs	
Horn	
Interactive Multi-Digital Indicator with Diagnostic Trouble Codes	
Lifting/Tie Down Lugs	
Swing-Out Engine Tray	
ELECTRICAL	
All Motion Alarm	
Tilt Light and Alarm	
TRACKS	
Black Rubber Excavator Tracks	
TECHNOLOGY	
Telematics-Ready Harness	

Note: Some options may increase lead time, and some option combinations may not be available.

* Provides indicator lights at platform control console for system distress, low fuel, 5 degree tilt light, and foot switch status.

1. Not available for 30x36" Platform

2. Requires self-closing gate

3. Includes Arctic Hydraulic Hoses (Drive, Steer), Main Boom Cable, Extreme Cold Engine Oil, Fuel Conditioner, Engine Block Heater, Battery Blanket, Glow Plugs, Hydraulic Tank Heater, Oversized Footswitch And Arctic Hydraulic Oil

4. Includes Battery Blanket, Hydraulic Tank Heater, Block Heater

5. Includes Platform Work Lights, Head And Tail Lights, Amber Beacon

6. Includes glass and tray panel with strap, 250 lb capacity (A/S models)

7. Includes 7500W Generator, Power Cable To Platform

8. Includes 280 amp Miller[®] welder in the platform, leads, clamp, stinger and fire extinguisher. SkyPower purchased separately.

9. Includes Fire Extinguisher And Welder Bracket

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (30 X 60", 36 X 72", 36 X 96")	N/C
Tri-Entry Platform with Swing Gate (36 X 72" or 36 X 96")	\$530
Platform, Drop Bar (30 X 36")	\$1,585
Inward Self-Closing Swing Gate ¹	\$530
Fall Arrest Platform (36 X 72"), Rear Entry ²	\$10,255
Platform Rail Extensions (36 X 72", 36 X 96")	\$1,030
Center Storage Tray	\$90
Mesh to Top Rail (36 X 96")	\$1,290
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640
TURNTABLE & CHASSIS	
2500W 60Hz Generator	\$4,240
Intake Air Shut Off Valve	\$4,430
Battery Disconnect	\$515
Engine Tray Jack	\$685
ACCESSORIES	
1/2 in. Airline To Platform	\$735
Amber Beacon	\$515
Arctic Package ³	\$5,170
Cold Weather Package ⁴	\$1,755
Light Package ⁵	\$2,300
SkyGlazier ⁶	\$1,875
SkyPower Package ⁷	\$9,420
SkyWelder Package ⁸	\$5,265
SkySense™ Level I**	\$5,190
SkySense™ Level II**	\$5,990
Welder Ready Package ⁹	\$610
ELECTRICAL	
White Noise Alarm	\$580
MISCELLANEOUS	
Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

The JLG "1 & 5" Warranty & Machine Shipments see page 1

**See page 61 for SkySense details

600 SERIES Telescopic Boom Lifts Price List

600S/660SJ & 600S HC3/660SJ HC3

	600S	600S HC3	660SJ	660SJ HC3
PACKAGE 3 (4WD Dual Fuel)	\$198,580	\$210,500	\$209,625	\$222,210
• Ford MSG425-DF 84 hp (62 kW) Dual Fuel Engine				
PACKAGE 4 (4WD Diesel)	\$198,580	\$210,500	\$209,625	\$222,210
• Deutz D2.9L4 48.8 hp (36.4 kW) Tier 4 Final				

Package 3 & 4 Price Adjustments:

4-Wheel Steer (Non-HC3 Models Only) add \$7,640

STANDARD FEATURES

PLATFORM SECTION
110V-AC Receptacle in Platform
12V-DC Auxiliary Power
160 Degree Hydraulic Platform Rotator (600S), (180 degree rotation 660SJ)
600/1,000 lb capacity (600S), 550/750 lb capacity (660SJ)
Control ADE [®] System
Load Sensing System
Platform 36 x 96 in. (.91 x 2.44 m) Side Entry
Platform Console Machine Status Light Panel*
Proportional Controls
SkyGuard SkyLine™
BOOM
6 ft (1.83 m) Articulating Jib (660SJ only)
TURNTABLE & CHASSIS
Glow Plugs (Diesel Engines)
Gull-Wing Dura Tough Hoods
Horn
Hourmeter
Oscillating Axle
Swing-Out Engine Tray
Tie Down and Lifting Lugs
ELECTRICAL
All Motion Alarm
Tilt Light and Alarm
TECHNOLOGY
Telematics-Ready Harness
TIRES
IN355/55D625 Foam Filled Tires

Note: Some options may increase lead time, and some option combinations may not be available.

* Provides indicator lights at platform control console for system distress, low fuel, 5 degree tilt light, and foot switch status.

1. Not available for 30x36" Platform

2. Requires self-closing gate

3. Includes Arctic Hydraulic Hoses (Drive, Steer), Main Boom Cable, Extreme Cold Engine Oil, Fuel Conditioner, Engine Block Heater, Battery Blanket, Glow Plugs, Hydraulic Tank Heater, Oversized Footswitch And Arctic Hydraulic Oil

4. Includes Battery Blanket, Hydraulic Tank Heater, Block Heater

5. Includes Platform Work Lights, Head And Tail Lights, Amber Beacon

6. Includes glass and tray panel with strap, 250 lb capacity (A/S models)

7. Includes 7500W Generator, Power Cable To Platform

8. Includes 280 amp Miller™ welder in the platform, leads, clamp, stinger and fire extinguisher. SkyPower purchased separately.

9. Includes Fire Extinguisher And Welder Bracket

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (36 X 72", 36 X 96")	N/C
Tri-Entry Platform with Swing Gate (36 X 72" or 36 X 96")	\$530
Platform, Drop Bar (30 X 36")	\$1,585
Inward Self-Closing Swing Gate ¹	\$530
Bolt-On Fall Arrest System (6' or 8' Platform) ²	\$3,430
Fall Arrest Platform (36 X 96"), Rear Entry ²	\$10,255
Platform Rail Extensions (36 X 72", 36 X 96")	\$1,030
Center Storage Tray	\$90
Mesh to Top Rail (36 X 96")	\$1,290
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640
TURNTABLE & CHASSIS	
2500W 60Hz Generator	\$4,240
Battery Disconnect	\$515
Deutz TD2.9L4 67 hp (50 kW) Tier 4 Final	\$7,055
Intake Air Shut Off Valve	\$4,430
Tow Bar 2WS/4WS	\$4,110/\$7,640
TIRES	
FF Sand/Turf Tire (High Floatation-Includes add'l counterweight)	\$13,190
IN355/55D625 Foam Filled (Non-Marking)	\$2,640
ACCESSORIES	
1/2 in. Airline To Platform	\$735
Amber Beacon	\$515
Arctic Package ³	\$5,170
Cold Weather Package ⁴	\$1,755
Light Package ⁵	\$2,300
SkyGlazier ⁶	\$1,875
SkyPower Package ⁷	\$9,420
SkyWelder Package ⁸	\$5,265
SkySense™ Level I**	\$5,190
SkySense™ Level II**	\$5,990
Welder Ready Package ⁹	\$610
ELECTRICAL	
Motion Ambient White Noise Alarm	\$580
MISCELLANEOUS	
Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

The JLG "1 & 5" Warranty & Machine Shipments see page 1

**See page 61 for SkySense details

600 CRAWLER SERIES Telescopic Boom Lifts Price List



660SJC

PACKAGE 2 (Crawler Diesel)

\$232,065

- Deutz TD2.9L4 67 hp (50 kW) Tier 4 Final

Package Price Adjustments:

Rubber Tracks	\$1,500
Steel Tracks with Rubber Pads	\$23,095

STANDARD FEATURES

PLATFORM SECTION	
110V-AC Receptacle in Platform	
12V-DC Auxiliary Power	
180 Degree Hydraulic Platform Rotator	
600/1,000 lb capacity (600SC), 550/750 lb capacity (660SJC)	
Load Sensing System	
Platform 36 x 96 in. (.91 x 2.44 m) Side Entry	
Platform Console Machine Status Light Panel*	
Proportional Controls	
SkyGuard SkyLine™	
BOOM	
6 ft (1.83 m) Articulating Jib (660SJC only)	
TURNTABLE & CHASSIS	
Engine Distress Shutdown—Selectable via Analyzer	
Glow Plugs	
Gull-Wing Engine Hood	
Horn	
Hourmeter	
Lifting/Tie Down Lugs	
Oil Cooler	
Swing-Out Engine Tray	
ELECTRICAL	
All Motion Alarm	
Tilt Light and Alarm	
TRACKS	
Steel Tracks	
TECHNOLOGY	
Telematics-Ready Harness	

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (36 X 72", 36 X 96")	N/C
Tri-Entry Platform with Swing Gate (36 X 72" or 36 X 96")	\$530
Platform, Drop Bar (30 X 36")	\$1,585
Inward Self-Closing Swing Gate ¹	\$530
Platform Rail Extensions (36 X 72", 36 X 96")	\$1,030
Center Storage Tray	\$90
Mesh to Top Rail (36 X 96")	\$1,290
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640
TURNTABLE & CHASSIS	
2500W 120V 60Hz Generator	\$4,240
4000W 60Hz Generator	\$5,170
Battery Disconnect	\$515
Intake Air Shut Off Valve	\$4,430
ACCESSORIES	
1/2 in. Airline To Platform	\$735
Amber Beacon	\$515
Arctic Package ²	\$5,170
Cold Weather Package ³	\$1,755
Light Package ⁴	\$2,300
SkyGlazier ⁵	\$1,875
SkyPower Package ⁶	\$9,420
SkyWelder Package ⁷	\$5,265
SkySense™ Level I**	\$5,190
SkySense™ Level II**	\$5,990
Welder Ready Package ⁸	\$610
ELECTRICAL	
All Motion Ambient White Noise Alarm ILOS	\$580
MISCELLANEOUS	
Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

Note: Some options may increase lead time, and some option combinations may not be available.

* Provides indicator lights at platform control console for system distress, low fuel, 5 degree tilt light, and foot switch status.

1. Not available for 30x36" Platform

2. Includes Arctic Hydraulic Hoses (Drive, Steer), Main Boom Cable, Extreme Cold Engine Oil, Fuel Conditioner, Engine Block Heater, Battery Blanket, Glow Plugs, Hydraulic Tank Heater, Oversized Footswitch And Arctic Hydraulic Oil

3. Includes Battery Blanket, Hydraulic Tank Heater, Block Heater

4. Includes Platform Work Lights, Head And Tail Lights, Amber Beacon

5. Includes glass and tray panel with strap, 250 lb capacity (A/S models)

6. Includes 7500W Generator, Power Cable To Platform

7. Includes 280 amp Miller™ welder in the platform, leads, clamp, stinger and fire extinguisher. SkyPower purchased separately.

8. Includes Fire Extinguisher And Welder Bracket

The JLG "1 & 5" Warranty & Machine Shipments see page 1

**See page 61 for SkySense details

800 SERIES Telescopic Boom Lifts Price List

800S/860SJ & 800S HC3/860SJ HC3

	800S	800S HC3	860SJ	860SJ HC3
PACKAGE 1 (2WD Dual Fuel)	\$261,430	\$277,120	\$268,135	\$284,230
• Ford MSG425-DF 84 hp (62.6 kW) Dual Fuel Engine				
PACKAGE 2 (2WD Diesel)	\$261,430	\$277,120	\$268,135	\$284,230
• Deutz TD2.9L4 67 hp (50 kW) Tier 4 Final				
PACKAGE 3 (4WD Dual Fuel)	\$276,330	\$292,920	\$283,035	\$300,030
• Ford MSG425-DF 84 hp (62.6 kW) Dual Fuel Engine				
PACKAGE 4 (4WD Diesel)	\$276,330	\$292,920	\$283,035	\$300,030
• Deutz TD2.9L4 67 hp (50 kW) Tier 4 Final				

STANDARD FEATURES

PLATFORM SECTION
110V-AC Receptacle in Platform
12V-DC Auxiliary Power
180 Degree Hydraulic Platform Rotator
Control ADE [®] System
Dual Rated Capacities
Load Sensing System
Platform 36 x 96 in. (.91 x 2.44 m) Side Entry
Platform Console Machine Status Light Panel*
Proportional Controls
SkyGuard SkyLine™
Tilt Light and Alarm
BOOM
6 ft (1.83 m) Articulating Jib (860SJ) Only
TURNTABLE & CHASSIS
Engine Distress Warning/Shutdown—Selectable via Analyzer
Fuel Gauge
Glow Plugs (diesel engines)
Gull-Wing Engine Hood
Hourmeter
Hydrostatic Drive
Oscillating Axle
Swing-Out Engine Tray
Tie Down Lugs
ELECTRICAL
All Motion Alarm
TIRES
15-625 Rim Protector Foam Filled Lug Tread Tires
TECHNOLOGY
Telematics-Ready Harness

Note: Some options may increase lead time, and some option combinations may not be available.

* Provides indicator lights at platform control console for system distress, low fuel, 5 degree tilt light, and foot switch status.

1. Not available for 30x36" Platform

2. Requires self-closing gate

3. Includes Arctic Hydraulic Hoses (Drive, Steer), Main Boom Cable, Extreme Cold Engine Oil, Fuel Conditioner, Engine Block Heater, Battery Blanket, Glow Plugs, Hydraulic Tank Heater, Oversized Footswitch And Arctic Hydraulic Oil

4. Includes Battery Blanket, Hydraulic Tank Heater, Block Heater

5. Includes Console Cover, Boom Wipers And Cylinder Bellows

6. Hostile Environment Package Required; Includes Shields Over Turntable Swivel, Pinion Gear, Turntable

Bearing, And Fire Restraint Wrap Over Drive And Steer Hoses

7. Includes Platform Work Lights, Head And Tail Lights, Amber Beacon

8. Includes glass and tray panel with strap, 250 lb capacity (A/S models)

9. Includes 7500W Generator, Power Cable To Platform

10. Includes 280 amp Miller™ welder in the platform, leads, clamp, stinger and fire extinguisher. SkyPower purchased separately.

11. Includes Fire Extinguisher And Welder Bracket

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (30 X 48", 30 X 60", 36 X 72", 36 X 96")	N/C
Tri-Entry Platform with Swing Gate (36 X 72" or 36 X 96")	\$530
Platform, Drop Bar (30 X 36")	\$1,585
Inward Self-Closing Swing Gate ¹	\$530
Bolt-On Fall Arrest System (6' or 8' Platform) ²	\$3,430
Fall Arrest Platform (36 X 96"), Rear Entry ²	\$10,255
Platform Rail Extensions (36 X 72", 36 X 96")	\$1,030
Center Storage Tray	\$90
Mesh to Top Rail (36 X 96")	\$1,290
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640
TURNTABLE & CHASSIS	
2500W 120V 60Hz Generator	\$4,240
4000W 60Hz Generator	\$5,170
43.5 Lb (19.7 Kg) Propane Tank	\$580
Battery Disconnect	\$515
Engine Tray Jack (Diesel)	\$685
Intake Air Shut Off Valve	\$4,430
Machine Lifting Attachment	\$205
Oil Cooler	\$2,500
Tow Bar (S Only)	\$4,110
TIRES	
18-625 FF Non Marking Tires	\$5,275
18-625(24.5) FF Tires	\$2,110
ACCESSORIES	
1/2 in. Airline To Platform	\$735
Arctic Package ³	\$6,550
Cold Weather Package ⁴	\$1,755
Hostile Environment Package ⁵	\$3,085
Hostile Environment Package (Extreme) ⁶	\$710
Light Package ⁷	\$2,300
SkyGlazier ⁸	\$1,875
SkyPower Package ⁹	\$9,420
SkyWelder Package ¹⁰	\$5,265
SkySense™ Level I**	\$5,190
SkySense™ Level II**	\$5,990
Welder Ready Package ¹¹	\$610
ELECTRICAL	
All Motion Ambient White Noise Alarm ILOS	\$580
Amber Beacon	\$515
MISCELLANEOUS	
Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

The JLG "1 & 5" Warranty & Machine Shipments see page 1

**See page 61 for SkySense details

ULTRA SERIES Telescopic Boom Lifts Price List



1200SJP/1350SJP/1500SJ/1850SJ

1200SJP **\$400,090**

1350SJP **\$455,570**

1500SJ **\$550,670**

1850SJ **\$656,370**

(4WD 4WS Diesel)

- Deutz TCD2.9L4 74.2 hp (55.4 kW) Tier 4 Final
- Deutz TCD3.6L 99.8 hp (74.4 kW) Tier 4 Final on 1850SJ

STANDARD FEATURES

PLATFORM SECTION
12V-DC Auxiliary Power
180" Hydraulic Platform Rotator (173" Hydraulic Platform Rotator on 1850SJ)
3 Selectable Steering Modes
AC Receptacle in Platform
Control ADE* System
LCD Panel at Operator's Platform Control Console (1500SJ/1850SJ only)
Load Sensing System
Platform 36 x 96 in. (.91 x 2.44 m) Side Entry
Platform Console Machine Status Light Panel*
Proportional Controls
SkyGuard SkyLine™
Tilt Light and Alarm
TURNTABLE & CHASSIS
Drive-Out Extendable Axles
Engine Distress Warning/Shutdown—Selectable via JLG Analyzer
Full-Time 4WD
Glow Plugs
Gull-Wing Steel Hoods
Hourmeter
Lifting/Tie Down Lugs
Oscillating Axle (1200SJP/1350SJP/1500SJ only)
Swing-Out Engine Tray
ELECTRICAL
All Motion Alarm
TIRES
445/50D710 Foam-Filled Rim Protector Lug Tread Tires
TECHNOLOGY
Telematics-Ready Harness

Note: Some options may increase lead time, and some option combinations may not be available.

* Provides indicator lights at platform control console for system distress, low fuel, 5 degree tilt light, and foot switch status.

1. Not available for 30x36" Platform
2. Requires self-closing gate
3. Includes Battery Blanket, Hydraulic Tank Heater, Block Heater
4. Includes Extreme Cold Engine Oil, Fuel Conditioner, Engine Block Heater, Battery Blanket, Glow Plugs, Hydraulic Tank Heater, Oversized Footswitch And Arctic Hydraulic Oil
5. Includes Console Cover, Boom Wipers And Cylinder Bellows
6. Includes Platform Lights, Head And Tail Lights And Amber Beacon
7. Includes glass and tray panel with strap, 250 lb capacity (A/S models)
8. Includes 7500W Generator, Power Cable To Platform
9. Includes 280 amp Miller™ welder in the platform, leads, clamp, stinger and fire extinguisher. SkyPower purchased separately.
10. Cannot Be Used in Conjunction with SkySense
11. Includes fire extinguisher and welder bracket

INDIVIDUAL OPTIONS

PLATFORM SECTION	
Platform (30 X 48", 36 X 72", 36 X 96")	N/C
Tri-Entry Platform with Swing Gate (36 X 72" or 36 X 96")	\$530
Platform, Drop Bar (30 X 36")	\$1,585
Inward Self-Closing Swing Gate ¹	\$530
Bolt-On Fall Arrest System (6' or 8' Platform) ²	\$3,430
Fall Arrest Platform (36 X 96"), Rear Entry ²	\$10,255
Platform Rail Extensions (36 X 72", 36 X 96")	\$1,030
Center Storage Tray	\$90
Mesh to Top Rail (36 X 96")	\$1,290
SkyGuard SkyBar	\$1,170
SkyGuard SkyEye™	\$1,640
TURNTABLE & CHASSIS	
Battery Disconnect	\$515
Intake Air Shut Off Valve	\$4,430
Oil Cooler	\$2,500
TIRES	
445/65-24 Solid Tires	\$12,200
445/65-24 Solid Non-Mark Tires	\$18,885
ACCESSORIES	
1/2 in. Airline To Platform	\$735
110V Cold Weather Pkg ³	\$1,755
Amber Beacon	\$515
Cold Weather Plus ⁴	\$6,830
Hostile Environment Package ⁵	\$3,085
Light Package ⁶	\$2,300
SkyGlazier ⁷	\$1,875
SkyPower Package ⁸	\$9,420
SkyWelder Package ⁹	\$5,265
SkySense™ Level I**	\$5,190
SkySense™ Level II**	\$5,990
Soft Touch ¹⁰	\$8,245
Welder Ready Package ¹¹	\$610
ELECTRICAL	
Ambient White Noise Alarm	\$580
MISCELLANEOUS	
Special Hydraulic Fluids	Consult Factory
Special Paint	Consult Factory
TECHNOLOGY	
ClearSky™	Consult Factory

The JLG "1 & 5" Warranty & Machine Shipments see page 1
**See page 61 for SkySense details

TOW-PRO[®] Towable Boom Lifts Price List



T350/T500J

T350 **\$41,610**

T500J **\$69,340**

Standard Model Price Adjustments:

Honda Gas Engine (in place of standard batteries).....No Charge

STANDARD FEATURES

PLATFORM SECTION
110V-AC Receptacle in Platform
Accessory Mounting Tray
Platform 30 x 48 in. (.76 x 1.22 m) Side Entry
Proportional Controls
BOOM
Air and Water Lines to Platform
Telescopic Upper Boom
TURNTABLE & CHASSIS
Auto-Leveling Hydraulic Outriggers
Battery Condition Indicator
Four 6V, 220 Amp-Hour Batteries
Hourmeter
Parking Brake
ELECTRICAL
All Motion Alarm
Tilt Light and Alarm
TECHNOLOGY
Telematics-Ready Harness

INDIVIDUAL OPTIONS

TURNTABLE & CHASSIS	
Drive and Set	\$10,450
Lifting Lugs	\$75
Non-Marking Jack Pads	\$1,360
Platform Rotator (Manual)	\$2,300
TIRES	
5.5X14 Radial Spare Tire	\$835
ACCESSORIES	
Material Hook	\$1,160
Wheel Chocks (Without Spare Tire)	\$575
Wheel Chocks (With Spare Tire)	\$905
ELECTRICAL	
Amber Beacon	\$515

Note: Some options may increase lead time, and some option combinations may not be available.

The JLG "1 & 5" Warranty & Machine Shipments see page 1



NORTH AMERICA | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020



VERTICAL MAST LIFTS | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020

SJ12 \$18,745

- 12' (3.65 m) Raised platform height
- 500 lbs (227 kg) Capacity
- 30.5" (0.78 m) Overall width
- 55" (1.40 m) Overall length
- 70.3" (1.79 m) Stowed height
- 27" x 33.5" (0.69 x 0.85 m) Platform size (inside)

SJ16 \$20,525

- 15'7" (4.75 m) Raised platform height
- 500 lbs (227 kg) Capacity
- 30.5" (0.78 m) Overall width
- 55" (1.40 m) Overall length
- 70.3" (1.79 m) Stowed height
- 27" x 33.5" (0.69 x 0.85 m) Platform size (inside)

Standard Features

- Drivable at full height with platform retracted
- Variable speed, front two wheel hydraulic drive
- 90° Steering (zero inside turning radius)
- Dual holding brakes
- Shroud style, impact resistant composite control box
- Proportional controls for drive & lift functions
- 16" (0.41 m) Traversing platform
- 24V DC power source
- Low voltage battery protection
- 30% Gradeability
- Solid rubber, non-marking tires
- Pothole protection system
- 110V AC outlet at platform with GFI
- 28 mph (12.5 m/s) wind rating (SJ12 only)
- Tilt sensor (3.0° x 1.5°)
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Lanyard attachment points
- Operator horn
- Lift rings/tie downs
- Full height Spring hinged entry gate
- SKYCODED™ Color coded and numbered wiring system
- Telematics ready
- 5 year warranty on standard charger
- 2 Year Gold Leaf Warranty (5 year structural warranty)

Accessories†

Light duty pipe rack.....	\$525
Tool tray	\$135
Florescent tube carrier	\$325

Options‡

Dual flashing lights	\$510
AGM Batteries.....	\$1,200
Saloon gate	\$400
Bio oil	\$435
28mph (12.5 m/s) wind rating kit to 12ft (SJ16 only)	\$530
Secondary guarding lift enable (SGLE)	\$140
Non destructive testing	\$1,275

† Standard lead times may be increased when optional equipment is added, consult factory

** Capacities, and machine weights may differ when options are added



DC ELECTRIC SCISSOR LIFTS | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020

SJ3215 \$18,495

- 14' 7" (4.44 m) Raised platform height
- 600 lbs (272 kg) Capacity
- 32" (0.81 m) Overall width
- 71" (1.80 m) Overall length
- 66" (1.67 m) Stowed height (rails down)
- 26" x 61" (0.66 x 1.55 m) Platform size (inside)

SJ3219 \$19,175

- 18' 6" (5.64 m) Raised platform height
- 500 lbs (227 kg) Capacity
- 32" (0.81 m) Overall width
- 71" (1.80 m) Overall length
- 70" (1.78 m) Stowed height (rails down)
- 26" x 61" (0.66 x 1.55 m) Platform size (inside)

Standard Features

- Drivable at full height
- Variable speed, front two wheel hydraulic drive
- 90° steering (zero inside turning radius)
- Dual holding brakes
- SKYCODED™ color coded and numbered wiring system
- On-board visual interface with diagnostic capabilities
- Shroud style, impact resistant composite control box with extended cable
- Proportional controls for drive & lift functions
- 3' (0.91 m) Roll out extension deck
- 24V DC power source
- Low voltage battery protection
- 25% Gradeability
- Solid rubber, non-marking tires
- Pothole protection system
- 110V AC outlet on platform with GFI
- 28 mph (12.5 m/s) wind rating
- Tilt sensor (3.5° x 1.5°)
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Lanyard attachment points
- Operator horn
- Forklift pockets and tie down/lift lugs
- Overload sensing system
- Fold down hinged railing system
- Half height spring hinged entry gate
- Telematics ready
- 5 year warranty on standard charger and controller
- 2 Year Gold Leaf Warranty (5 year structural warranty)

Accessories†

Light duty pipe rack.....	\$525
Heavy duty pipe rack.....	\$1,155
Board carrier	\$785
Tool caddy.....	\$390

Options‡

Flashing light.....	\$270
Dual flashing lights	\$510
800W AC inverter	\$2,630
250 Ah batteries (cannot be combined with EE rating package)	\$345
AGM Batteries.....	\$1,200
Lockable swingout trays.....	\$90
EE rating package (not available with telematics access keypad)	\$1,120
Full height spring hinged entry gate	\$290
Bio oil	\$220
Secondary guarding lift enable (SGLE)	\$140
Non destructive testing	\$1,275

† Standard lead times may be increased when optional equipment is added, consult factory

** Capacities, and machine weights may differ when options are added



DC ELECTRIC SCISSOR LIFTS | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020

SJ3220..... \$22,410

- 19' 6" (5.94 m) Raised platform height
- 900 lbs (408 kg) Capacity
- 32" (0.81 m) Overall width
- 91.6" (2.32 m) Overall length
- 69" (1.75 m) Stowed height (rails down)
- 28" x 83" (0.71 x 2.11 m) Platform size (inside)

SJ3226..... \$27,410

- 25' 6" (7.78 m) Raised platform height
- 500 lbs (227 kg) Capacity
- 32" (0.81 m) Overall width
- 91.6" (2.33 m) Overall length
- 76" (1.93 m) Stowed height (rails down)
- 28" x 83" (0.71 x 2.11 m) Platform size (inside)

Standard Features

- Drivable at full height
- Variable speed, rear two wheel hydraulic drive
- Dual holding brakes
- SKYCODED™ color coded and numbered wiring system
- On-board visual interface with diagnostic capabilities
- Shroud style, impact resistant composite control box with extended cable
- Proportional controls for drive & lift functions
- 3' (0.91 m) Roll out extension deck
- 24V DC power source
- Low voltage battery protection
- 25% Gradeability
- Solid rubber, non-marking tires
- Pothole protection system
- 110V AC outlet on platform with GFI
- 28 mph (12.5 m/s) wind rating (SJ3226 to 18' 6" (5.63 m))
- Tilt sensor (3.5° x 1.5°)
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Lanyard attachment points
- Operator horn
- Forklift pockets and tie down/lift lugs
- Overload sensing system
- Fold down hinged railing system
- Half height spring hinged entry gate
- Telematics ready
- 5 year warranty on standard charger and controller
- 2 Year Gold Leaf Warranty (5 year structural warranty)

Accessories†

Light duty pipe rack.....	\$525
Heavy duty pipe rack.....	\$1,155
Board carrier	\$785
Tool caddy	\$390

Options‡

Flashing light.....	\$270
Dual flashing lights	\$510
6' (1.83 m) Powered ext. deck (SJ3220)*	\$3,685
*adds 260 lbs to unit weight and reduces overall capacity to 800 lbs	
800W AC inverter (cannot be combined with powered extension deck).....	\$2,630
250 Ah batteries (cannot be combined with EE rating package)	\$345
AGM Batteries.....	\$1,200
Lockable swingout trays.....	\$90
EE rating package (not available with telematics access keypad)	\$1,120
Full height spring hinged entry gate.....	\$290
Bio oil	\$520
Secondary guarding lift enable (SGLE)	\$140
Non destructive testing	\$1,275

† Standard lead times may be increased when optional equipment is added, consult factory

** Capacities, and machine weights may differ when options are added



DC ELECTRIC SCISSOR LIFTS | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020

SJ4726.....\$28,535

- 25' 7" (7.80 m) Raised platform height
- 1,000 lbs (454 kg) Capacity
- 47" (1.19 m) Overall width
- 91.6" (2.33 m) Overall length
- 75" (1.90 m) Stowed height (rails down)
- 42" x 83" (1.07 x 2.11 m) Platform size (inside)

SJ4732.....\$35,495

- 31' 7" (9.63 m) Raised platform height
- 700 lbs (318 kg) Capacity
- 47" (1.20 m) Overall width
- 91.6" (2.33 m) Overall length
- 78.5" (1.99 m) Stowed height (rails down)
- 42" x 83" (1.07 x 2.11 m) Platform size (inside)

Standard Features

- Drivable at full height
- Variable speed, rear two wheel hydraulic drive
- Dual holding brakes
- SKYCODED™ color coded and numbered wiring system
- On-board visual interface with diagnostic capabilities
- Shroud style, impact resistant composite control box with extended cable
- Proportional controls for drive & lift functions
- 4' (1.22 m) Roll out extension deck
- 24V DC power source
- Low voltage battery protection
- 25% gradeability
- Solid rubber, non-marking tires
- Pothole protection system
- 110V AC outlet on platform with GFI
- 28 mph (12.5 m/s) wind rating
- Tilt sensor (3.5° x 1.5°)
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Lanyard attachment points
- Operator horn
- Forklift pockets and tie down/lift lugs
- Overload sensing system
- Fold down hinged railing system
- Half height spring hinged entry gate
- Telematics ready
- 5 year warranty on standard charger and controller
- 2 Year Gold Leaf Warranty (5 year structural warranty)

Accessories†

Light duty pipe rack.....	\$525
Heavy duty pipe rack.....	\$1,155
Board carrier	\$785
Tool caddy.....	\$390

Options‡

Flashing light.....	\$270
Dual flashing lights	\$510
6' (1.83 m) Powered ext. deck (SJ4726)*	\$4,715
*adds 36 lbs to unit weight and capacity remains the same	
800W AC inverter	\$2,630
250 Ah batteries (cannot be combined with EE rating package)	\$345
AGM Batteries.....	\$1,200
Lockable swingout trays.....	\$90
EE rating package (not available with telematics keypad)	\$1,120
Aircraft protection package# (SJ4726)	\$18,955
Full height spring hinged entry gate	\$290
Bio oil	\$520
Secondary guarding lift enable (SGLE)	\$140
Non destructive testing	\$1,275

† Standard lead times may be increased when optional equipment is added, consult factory

** Capacities, and machine weights may differ when options are added

Aircraft protection package includes other listed options as part of package (Option includes full height gate, 6' power deck, EE rating, bumper padding, bumper rails, morton tread plate, modified air-line to platform, spin-off hydraulic filter, extension deck interlock, front access gate with interlock, filter fittings on power deck ext. hydraulic circuit, base powerdeck controls (Incl. keyless start/base toggle switches), entry handrails, safety labels, interlock on rear entrance, e-coating on deck only, napa ground strap manuals [1 operator, 1 parts, 1 service, 1 usb per machine], 28 mph wind rating, off-board battery charger, capacity is reduced to 900 lbs)



DC ELECTRIC SCISSOR LIFTS | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020

SJ4740.....\$47,855

- 38' 11" (11.86 m) Raised platform height
- 770 lbs (349 kg) Capacity
- 47" (1.19 m) Overall width
- 94.5" (2.40 m) Overall length
- 79.5" (2.03 m) Stowed height (rails down)
- 42" x 86" (1.06 x 2.19 m) Platform size (inside)

Standard Features

- Drivable at full height
- Variable speed, front wheel hydraulic drive
- Dual holding brakes
- SKYCODED™ color coded and numbered wiring system
- On-board visual interface with diagnostic capabilities
- Shroud style, impact resistant composite control box with extended cable
- Proportional controls for drive & lift functions
- 3' (0.91 m) Roll out extension deck
- 24V DC power source
- Low voltage battery protection
- 25% Gradeability
- Solid rubber, non-marking tires
- Pothole protection system
- 110V AC outlet on platform with GFI
- 28 mph (12.5 m/s) wind rating to 24' (7.32 m)
- Tilt sensor (3.5° x 1.5°)
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Lanyard attachment points
- Operator horn
- Forklift pockets and tie down/lift lugs
- Overload sensing system
- Fold down hinged railing system
- Half height spring hinged entry gate
- Telematics ready
- 5 year warranty on standard charger and controller
- 2 Year Gold Leaf Warranty (5 year structural warranty)

Accessories[‡]

Light duty pipe rack.....	\$525
Heavy duty pipe rack.....	\$1,155
Board carrier	\$785
Tool caddy	\$390

Options[‡]

Flashing light.....	\$270
Dual flashing lights	\$510
800W AC inverter	\$2,630
AGM Batteries.....	\$1,200
Lockable swingout trays.....	\$90
Full height spring hinged entry gate.....	\$290
Bio oil	\$595
Secondary guarding lift enable (SGLE)	\$140
Non destructive testing	\$1,275

* Standard lead times may be increased when optional equipment is added, consult factory

** Capacities, and machine weights may differ when options are added



ROUGH TERRAIN SCISSOR LIFTS | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020

SJ6826 RT..... \$54,140

- 26' (7.9 m) Raised platform height
- 1,250 lbs (567 kg) Capacity
- 69.5" (1.76 m) Overall width
- 107" (2.72 m) Overall length
- 63.5" (1.61 m) Stowed height (rails down)
- 56" x 96" (1.42 x 2.44 m) Platform size (inside)

SJ6832 RT..... \$61,025

- 32' (9.8 m) Raised platform height
- 1,000 lbs (454 kg) Capacity
- 69.5" (1.76 m) Overall width
- 107" (2.72 m) Overall length
- 69" (1.75 m) Stowed height (rails down)
- 56" x 96" (1.42 x 2.44 m) Platform size (inside)

Standard Features

- Crossover symmetrical 4WD
- Drivable at full height with roll out deck fully extended
- Shroud style, impact resistant composite control box
- 5' (1.52 m) Roll out extension deck
- Dual fuel (gas/propane) or diesel engine
- 90° swing out engine tray
- Multiple wet disc spring applied hydraulic release brakes
- 110V AC outlet on platform with GFI
- Up to 50% Gradeability
- Foam-filled low profile grip lug tires
- Tilt sensor (4.5° x 2.5°)
- Tilt alarm with drive & lift cut-out
- Lanyard attachment points
- All motion audible alarm
- Operator horn
- Hinged railing system
- Forklift pockets and tie down/lift lugs
- Overload sensing system
- Fold down hinged railing system
- Full height spring hinged entry gate at rear of unit
- SKYCODED™ color coded and numbered wiring
- Telematics ready
- 2 Year Gold Leaf Warranty (5 year structural warranty)

Accessories†

Heavy duty pipe rack.....	\$2,150
Tool caddy.....	\$390

Options‡

Diesel scrubber for tier 4 final engine.....	\$1,270
Independent/auto leveling outriggers	\$10,440
Flashing light.....	\$270
3.5 kW generator	\$4,900
Cold weather start package.....	\$1,270
<small>(Includes hydraulic oil tank heater, battery blanket, coolant or block heater)</small>	
Positive air shut-off valve	\$3,570
Bio oil	\$1,505
Secondary guarding lift enable (SGLE)	\$140
Non destructive testing	\$1,275
Foam-filled Non-marking tires	\$1,480

† Standard lead times may be increased when optional equipment is added, consult factory

** Capacities, and machine weights may differ when options are added



ROUGH TERRAIN SCISSOR LIFTS | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020

SJ9233 RT..... \$85,220

- 33' (10.06 m) Raised platform height
- 2,750 lbs (1,247 kg) Capacity
- 90.6" (2.30 m) Overall width
- 177" (4.50 m) Overall length
- 75" (1.91 m) Stowed height (rails down)
- 72" x 172" (1.82 x 4.36 m) Platform size (inside)
- 5' (1.52 m) Roll out extension deck

Standard Features

- AXLDRIIVE™ Axle-based 4WD system
- Operator controlled locking rear differential and limited slip front differential
- Drivable at full height (except SJ9253 RT)
- Up to 40% gradeability
- Wet disc SAHR brakes (rear axle)
- SKYCODED™ Color coded and numbered wiring system
- On-board visual interface with diagnostic capabilities
- Kubota D1305 Tier 4F diesel engine
- Auto leveling outriggers (SJ9253 RT only)
- Self-centering scissor design to support optional dual extension decks
- Lockable power disconnect switch
- Flashing light
- Proportional controls
- Up to 2,750 lbs (1,247 kg) capacity
- Oversized platform with optimal clearance over side of machine
- Fold down hinged railing system
- Full height entry gates
- 5' (1.52 m) roll-out extension deck
- High strength and impact resistant composite control box
- Overload sensing system
- 110V AC Outlet on platform with GFI
- Tilt alarm (4.5° x 2.5°) with drive and lift cut-out
- Single point emergency lowering
- Hourmeter
- Operator horn
- All motion alarm
- Tie down/lifting lugs
- Grip lug solid tires
- Telematics ready
- 5 year warranty on controller
- 2 Year Gold Leaf Warranty (5 year structural warranty)

SJ9243 RT..... \$93,375

- 43' (13.11 m) Raised platform height
- 2,000 lbs (907 kg) Capacity
- 90.6" (2.30 m) Overall width
- 177" (4.50 m) Overall length
- 84" (2.13 m) Stowed height (rails down)
- 72" x 172" (1.82 x 4.36 m) Platform size (inside)
- 5' (1.52 m) Roll out extension deck

SJ9253 RT..... \$115,665

- 53' (16.15 m) Raised platform height
- 1,500 lbs (680 kg) Capacity
- 90.6" (2.30 m) Overall width
- 177" (4.50 m) Overall length
- 95.7" (2.43 m) Stowed height (rails down)
- 72" x 172" (1.82 x 4.36 m) Platform size (inside)
- 5' (1.52 m) Roll out extension deck

Accessories†

Heavy duty pipe rack.....	\$2,150
Material handling stand	\$3,220
Tool caddy.....	\$390

Options‡

Kubota 31hp WG972 dual fuel engine.....	\$2,050
Dual 5' (1.52 m) roll out extension decks	\$4,000
Extra proprane bracket	\$490
Auto leveling outriggers (standard on SJ9253 RT)	\$11,265
3.5 kW belt driven generator	\$2,410
Welder ready package.....	\$9,650
<small>(Includes 7.5 kW hydraulic generator, hydraulic oil cooler, 3-phase power connection in platform)</small>	
Diesel scrubber.....	\$1,270
Positive air shut-off valve.....	\$3,570
Cold weather start package.....	\$1,680
<small>*Recommended for regions where average monthly low temperatures can reach 14°F / -10°C (Includes hydraulic oil tank heater, battery blanket, coolant or block heater)</small>	
Arctic weather package.....	\$2,975
<small>**Recommended for regions where average monthly low temperatures can reach -0.4°F / -18°C (Includes cold weather start kit plus 60/40 coolant, arctic engine and gear oil)</small>	
Bio oil	\$1,705
Secondary guarding lift enable (SGLE)	\$140
Non destructive testing	\$1,275
Solid non-marking tires	\$1,025

† Standard lead times may be increased when optional equipment is added, consult factory

** Capacities, and machine weights may differ when options are added



ARTICULATING BOOM LIFTS | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020

SJ30 AJE..... \$84,265

- 29' 9" (9.07 m) Platform height
- 4' 1" (1.25 m) Jib
- 500 lbs (227 kg) Capacity
- 20' 7" (6.26 m) Horizontal reach
- 13' 1" (3.99 m) Up and over height
- 355° Non-continuous turret rotation
- 30" x 46" (0.76 x 1.17 m) Platform size

SJ30 ARJE..... \$86,670

- 29' 6" (9.00 m) Platform height
- 4' 1" (1.25 m) Jib
- 180° Horizontal Jib Rotation
- 500 lbs (227 kg) Capacity
- 20' 7" (6.26 m) Horizontal reach
- 13' 1" (3.99 m) Up and over height
- 355° Non-continuous turret rotation
- 30" x 46" (0.76 x 1.17 m) Platform size

Accessories‡

Pipe rack	\$925
Tool caddy	\$390

Options‡

360 Ah batteries	\$690
330 Ah AGM batteries	\$4,335
Rear spring hinged entry gate	\$345
Half height mesh platform	\$1,875
Bio oil	\$390
Control box cover	\$815
Flashing light	\$270
1000W AC Inverter	\$5,435
Non destructive testing	\$1,275

‡ Standard lead times may be increased when optional equipment is added, consult factory

** Capacities, and machine weights may differ when options are added

Standard Features

- EASYDRIVE™ Direction sensing drive and steer controls
- SKYRISER™ True vertical rise
- Direct AC electric drive
- Dual spring applied, electromagnetically released brakes
- Speed and angle sensing traction control
- Drivable at full height
- 35% Gradeability
- Relay based control system with SKYCODED™ color coded and numbered wiring
- 48V 305 Ah Battery pack
- Swing out battery trays
- Swing out cowlings for easy access
- Proportional controls
- Function speed selector
- Rotating jib (SJ30 ARJE only)
- 30" x 46" Platform
- Bolt-in platform railing system
- Lanyard attachment points
- Rear-entry sliding mid rail
- Secondary Guarding Electrical (SGE)
- Overload sensing system
- 110V AC Outlet on platform with GFI
- Tilt alarm (3.0° x 2.0°) with drive and lift cut-out
- Powered emergency lowering
- Hourmeter
- Operator horn
- All motion alarm
- 355° Non-continuous turret rotation
- Tie down/lifting lugs
- 22 x 7 x 12 Solid rubber, non-marking tires
- Telematics ready
- 2 Year Gold Leaf Warranty (5 year structural warranty)



ARTICULATING BOOM LIFTS | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020

SJ46 AJ+..... \$115,110

- 46' 3.25" (14.10 m) Platform height
- 4'8" (1.4 m) Jib
- 660 lbs (300 kg) Capacity
- 24' 8.75" (7.54 m) Horizontal reach
- 24' 5.25" (7.45 m) Up and over height
- 355° Non-continuous turret rotation
- 30" x 72" (0.8 x 1.8 m) Platform size

Standard Features

- EASYDRIVE™ Direction sensing drive and steer controls
- SKYRISER™ True vertical rise
- AXLDRIIVE™ Axle-based 4WD system
- Operator controlled locking rear differential and limited slip front differential
- Oscillating steer axle
- Drivable at full height
- 45% Gradeability
- Wet disc SAHR brakes (rear axle)
- Dual module control system with SKYCODED™ color coded and numbered wiring
- Deutz D2.9L4 diesel or Kubota WG2503 dual fuel engine
- Swing out engine tray
- Swing up cowlings for easy access
- Lockable power disconnect switch
- Proportional controls
- 660 lbs Capacity
- 30 x 72" Platform
- Bolt-in platform railing system
- Lanyard attachment points
- Dual-entry sliding mid rails
- Secondary Guarding Electrical (SGE)
- Overload sensing system
- 110V AC Outlet on platform with GFI
- Tilt alarm (5.0° x 5.0°) with drive and lift cut-out
- Single point emergency lowering
- Hourmeter
- Operator horn
- All motion alarm
- 355° Non-continuous turret rotation
- Tie down/lifting lugs
- 10 x 31 Grip lug solid tires
- Telematics ready
- 2 Year Gold Leaf Warranty (5 year structural warranty)

Accessories†

Pipe rack	\$925
Glazier kit	\$1,050
Tool caddy	\$390

Options‡

30 x 60" Platform	N/C
3.5 kW generator	\$5,510
<small>(Includes hydraulic oil cooler)</small>	
Welder ready package	\$11,555
<small>(Includes 12 kW generator, hydraulic oil cooler, 3-phase power connection in platform, and welder mount)</small>	
Welder package	\$16,635
<small>(Includes 12 kW generator, hydraulic oil cooler, 3-phase power connection in platform, welder mount, and Lincoln V275-S welder)</small>	
Cold weather start kit*	\$2,565
<small>*Recommended for regions where average monthly low temperatures can reach 14°F / -10°C</small>	
<small>(Includes cold start engine oil, battery blanket, hydraulic tank heater, and engine load kit (Deutz D2.9L4))</small>	
Arctic weather package*	\$3,125
<small>*Recommended for regions where average monthly low temperatures can reach -0.4°F / -18°C</small>	
<small>(Includes arctic engine oil, battery blanket, hydraulic tank heater, engine load kit (Deutz D2.9L4), block heater, arctic hydraulic oil, arctic platform rotator and arctic gear oil in the axles and swing drive. Glow plugs, arctic hydraulic hoses (all), and oversized foot switch cover are also included (standard equipment).)</small>	
Hydraulic oil cooler	\$1,920
Side spring hinged entry gate	\$345
Flashing light	\$695
Auxiliary top rail (30 x 72" platform only)	\$1,040
Control box cover	\$815
Positive air shut-off valve (diesel only)	\$3,570
Bio oil	\$2,665
Non destructive testing	\$1,275
Grip lug solid non-marking tires	\$1,025

‡ Standard lead times may be increased when optional equipment is added, consult factory

** Capacities, and machine weights may differ when options are added



ARTICULATING BOOM LIFTS | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020

SJ63 AJ+..... \$169,405

- 63' 3" (19.28 m) Platform height
- 5' (1.52 m) Jib
- 660 / 1,000 lbs (300 / 454 kg) Dual capacity
- 39' 9" (12.12 m) Horizontal reach
- 27' 6" (8.38 m) Up and over height
- 360° Continuous Turret Rotation
- 36" x 96" (0.9 x 2.4 m) Platform size

Standard Features

- EASYDRIVE™ Direction sensing drive and steer controls
- SPEEDYREACH™ Negative boom angle capability
- SKYRISER™ True vertical rise
- AXLDRIIVE™ Axle-based 4WD system
- Operator controlled locking rear differential and limited slip front differential
- Oscillating steer axle
- Drivable at full height
- 45% Gradeability
- Wet disc SAHR brakes (front and rear axle)
- Dual module control system with SKYCODED™ color coded and numbered wiring
- Deutz TD2.9L4 diesel or Kubota WG2503 dual fuel engine
- Swing out engine tray
- Swing up cowlings for easy access
- Lockable power disconnect switch
- Proportional controls
- 660 / 1,000 lbs Dual capacity
- 36" x 96" Platform
- Bolt-in platform railing system
- Lanyard attachment points
- Tri-entry sliding mid-rails
- Secondary Guarding Electrical (SGE)
- Overload sensing system
- 110V AC Outlet on platform with GFI
- Tilt alarm (5.0° x 5.0°) with drive and lift cut-out
- Single point emergency lowering
- Hourmeter
- Operator horn
- All motion alarm
- 360° Continuous turret rotation
- Tie down/lifting lugs
- 14 x 17.5 Grip lug foam-filled tires
- Telematics ready
- 2 Year Gold Leaf Warranty (5 year structural warranty)

Accessories†

Pipe rack	\$925
Glazier kit	\$1,050
Tool caddy	\$390

Options‡

36 x 72" Platform	N/C
3.5 kW generator	\$5,510
<small>(Includes hydraulic oil cooler)</small>	
Welder ready package	\$11,555
<small>(Includes 12 kW generator, hydraulic oil cooler, 3-phase power connection in platform, welder mount, and Lincoln V275-S welder)</small>	
Welder package	\$16,635
<small>(Includes 12 kW generator, hydraulic oil cooler, 3-phase power connection in platform, welder mount, and Lincoln V275-S welder)</small>	
Cold weather start kit*	\$2,565
<small>*Recommended for regions where average monthly low temperatures can reach 14°F / -10°C</small>	
<small>(Includes cold start engine oil, battery blanket, hydraulic tank heater, and engine load kit (Deutz TD2.9L4))</small>	
Arctic weather package*	\$3,865
<small>*Recommended for regions where average monthly low temperatures can reach -0.4°F / -18°C</small>	
<small>(Includes arctic engine oil, battery blanket, hydraulic tank heater, engine load kit (Deutz TD2.9L4), block heater, arctic hydraulic oil, arctic platform rotator and arctic gear oil in the axles and swing drive. Glow plugs, arctic hydraulic hoses (all), and oversized foot switch cover are also included (standard equipment).)</small>	
Extra propane tank and bracket (dual fuel only)	\$900
Hydraulic oil cooler	\$1,920
Flashing light	\$695
Hostile environment package	\$4,945
<small>(Includes cylinder bellows, boom wipers, covers for the fly boom cutouts, and control box cover)</small>	
Auxiliary top rail (36 x 96" platform only)	\$1,040
Control box cover	\$815
Side spring hinged entry gate	\$345
Positive air shut-off valve (diesel only)	\$3,570
Bio oil	\$2,975
Non destructive testing	\$1,275
Grip lug foam-filled non marking tires	\$1,310

† Standard lead times may be increased when optional equipment is added, consult factory

** Capacities, and machine weights may differ when options are added



ARTICULATING BOOM LIFTS | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020

SJ85 AJ..... \$248,905

- 85' (25.91 m) Platform height
- 5'6" (1.68 m) Jib
- 500 / 750 lbs (227 / 341 kg) Dual capacity
- 56' (17.07 m) Horizontal reach
- 34' (10.36 m) Up and over height
- 360° Continuous Turret Rotation
- 36" x 96" (0.9 x 2.4 m) Platform size

Standard Features

- EASYDRIVE™ Direction sensing drive and steer controls
- SPEEDYREACH™ Negative boom angle capability
- SKYRISER™ True vertical rise
- AXLDRIIVE™ Axle-based 4WD system
- Operator controlled locking rear differential and limited slip front differential
- Oscillating steer axle
- Drivable at full height
- 45% Gradeability
- Wet disc SAHR brakes (front and rear axle)
- Relay based control system with SKYCODED™ color coded and numbered wiring
- Deutz TD2.9L4 diesel engine
- Swing out engine tray
- Swing up cowlings for easy access
- Lockable power disconnect switch
- Proportional controls
- 500 / 750 lbs Dual capacity
- 36" x 96" Platform
- Bolt-in platform railing system
- Lanyard attachment points
- Tri-entry sliding mid-rails
- Secondary Guarding Electrical (SGE)
- Overload sensing system
- 110V AC Outlet on platform with GFI
- Tilt alarm (5.0° x 5.0°) with drive and lift cut-out
- Single point emergency lowering
- Hourmeter
- Operator horn
- All motion alarm
- 360° Continuous turret rotation
- Tie down/lifting lugs
- 18 x 625 Grip lug foam-filled tires
- Telematics ready
- 2 Year Gold Leaf Warranty (5 year structural warranty)

Accessories†

Pipe rack	\$925
Tool caddy	\$390

Options‡

36 x 72" Platform	N/C
Kubota WG3800 dual fuel engine	\$600
3.5 kW generator	\$5,510
<small>(Includes hydraulic oil cooler)</small>	
Welder ready package	\$11,555
<small>(Includes 12 kW generator, hydraulic oil cooler, 3-phase power connection in platform, welder mount, and Lincoln V275-S welder)</small>	
Welder package	\$16,635
<small>(Includes 12 kW generator, hydraulic oil cooler, 3-phase power connection in platform, welder mount, and Lincoln V275-S welder)</small>	
Cold weather start kit*	\$2,565

*Recommended for regions where average monthly low temperatures can reach 14°F / -10°C

(Includes cold start engine oil, battery blanket, hydraulic tank heater, and engine load kit (Deutz TD2.9L4))

Arctic weather package*	\$3,865
-------------------------------	----------------

*Recommended for regions where average monthly low temperatures can reach -0.4°F / -18°C

(Includes arctic engine oil, battery blanket, hydraulic tank heater, engine load kit (Deutz TD2.9L4), block heater, arctic hydraulic oil, arctic platform rotator and arctic gear oil in the axles and swing drive. Glow plugs, arctic hydraulic hoses (all), and oversized foot switch cover are also included (standard equipment).)

Extra propane tank and bracket (dual fuel only)	\$900
Hydraulic oil cooler	\$1,920
Flashing light	\$695
Hostile environment package	\$6,590
<small>(Includes cylinder bellows, boom wipers, covers for the fly boom cutouts, and control box cover)</small>	
Auxiliary top rail (36 x 96" platform only)	\$1,040
Control box cover	\$815
Side spring hinged entry gate	\$345
Positive air shut-off valve (only available on Deutz diesel engine)	\$3,570
Bio oil	\$4,975
Non destructive testing	\$1,275
Grip lug foam-filled non marking tires	\$1,490

‡ Standard lead times may be increased when optional equipment is added, consult factory

** Capacities, and machine weights may differ when options are added



TELESCOPIC BOOM LIFTS | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020

SJ40 T+ \$122,220

- 40' 7" (12.37 m) Platform height
- 750 / 1,000 lbs (340 / 454 kg) Dual capacity
- 33' 11" (10.34 m) Horizontal reach
- 170° Platform rotation
- 36" x 96" (0.91 x 2.4 m) Platform size

SJ45 T+ \$132,475

- 45' 1.5" (13.75 m) Platform height
- 5' (1.52 m) Jib
- 660 / 1,000 lbs (300 / 454 kg) Dual capacity
- 39' 8.25" (12.10 m) Horizontal reach
- 170° Platform rotation
- 36" x 96" (0.91 x 2.4 m) Platform size

Standard Features

- EASYDRIVE™ Direction sensing drive and steer controls
- AXLDRIIVE™ Axle-based 4WD system
- Operator controlled locking rear differential and limited slip front differential
- Oscillating steer axle
- Drivable at full height
- 50% Gradeability
- Wet disc SAHR brakes (rear axle)
- Dual module control system with SKYCODED™ color coded and numbered wiring
- Deutz D2.9L4 diesel or Kubota WG2503 dual fuel engine
- Swing out engine tray
- Swing up cowlings for easy access
- Lockable power disconnect switch
- Proportional controls
- Up to 750 / 1,000 lbs Dual capacity
- 36" x 96" Platform
- Bolt-in platform railing system
- Lanyard attachment points
- Tri-entry sliding mid rails
- Secondary Guarding Electrical (SGE)
- Overload sensing system
- 110V AC Outlet on platform with GFI
- Tilt alarm (5.0° x 5.0°) with drive and lift cut-out
- Single point emergency lowering
- Hourmeter
- Operator horn
- All motion alarm
- 360° Continuous turret rotation
- Tie down/lifting lugs
- 12 x 16.5 Grip lug foam-filled tires
- Telematics ready
- 2 Year Gold Leaf Warranty (5 year structural warranty)

Accessories†

Pipe rack	\$925
Glazier kit	\$1,050
Tool caddy	\$390

Options‡

36 x 72" Platform	N/C
3.5 kW generator	\$5,510
<small>(Includes hydraulic oil cooler)</small>	
Welder ready package	\$11,555
<small>(Includes 12 kW generator, hydraulic oil cooler, 3-phase power connection in platform, and welder mount)</small>	
Welder package	\$16,635
<small>(Includes 12 kW generator, hydraulic oil cooler, 3-phase power connection in platform, welder mount, and Lincoln V275-S welder)</small>	
Cold weather start kit*	\$2,565

*Recommended for regions where average monthly low temperatures can reach 14°F / -10°C

(Includes cold start engine oil, battery blanket, hydraulic tank heater, and engine load kit (Deutz D2.9L4))

Arctic weather package*	\$3,865
-------------------------------	---------

*Recommended for regions where average monthly low temperatures can reach -0.4°F / -18°C

(Includes arctic engine oil, battery blanket, hydraulic tank heater, engine load kit (Deutz D2.9L4), block heater, arctic hydraulic oil, arctic platform rotator and arctic gear oil in the axles and swing drive. Glow plugs, arctic hydraulic hoses (all), and oversized foot switch cover are also included (standard equipment).)

Hydraulic oil cooler	\$1,920
Side spring hinged entry gate.....	\$345
Flashing light	\$695
Auxiliary top rail (36 x 96" platform only)	\$1,040
Control box cover	\$815
Positive air shut-off valve (diesel only).....	\$3,570
Bio oil	\$4,995
Non destructive testing	\$1,275
Grip lug solid tires	N/C
Grip lug solid non-marking tires	\$1,025

‡ Standard lead times may be increased when optional equipment is added, consult factory

** Capacities, and machine weights may differ when options are added



TELESCOPIC BOOM LIFTS | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020

SJ61 T+..... \$174,790

- 61' 8" (18.80 m) Platform height
- 660 / 1,000 lbs (300 / 454 kg) Dual capacity
- 51' 3" (15.62 m) Horizontal reach
- 170° Platform rotation
- 36" x 96" (0.91 x 2.4 m) Platform size

SJ66 T+..... \$184,620

- 66' 3" (20.19 m) Platform height
- 5' (1.52 m) Jib
- 660 / 1,000 lbs (300 / 454 kg) Dual capacity
- 57' 0.25" (17.38 m) Horizontal reach
- 170° Platform rotation
- 36" x 96" (0.91 x 2.4 m) Platform size

Standard Features

- EASYDRIVE™ Direction sensing drive and steer controls
- AXLDRIIVE™ Axle-based 4WD system
- Operator controlled locking rear differential and limited slip front differential
- Oscillating steer axle
- Drivable at full height
- 50% Gradeability
- Wet disc SAHR brakes (front and rear axle)
- Dual module control system with SKYCODED™ color coded and numbered wiring
- Deutz TD2.9L4 diesel or Kubota WG2503 dual fuel engine
- Swing out engine tray
- Swing up cowlings for easy access
- Lockable power disconnect switch
- Proportional controls
- 660 / 1,000 lbs Dual capacity
- 36" x 96" Platform
- Bolt-in platform railing system
- Lanyard attachment points
- Tri-entry sliding mid rails
- Secondary Guarding Electrical (SGE)
- Overload sensing system
- 110V AC Outlet on platform with GFI
- Tilt alarm (5.0° x 5.0°) with drive and lift cut-out
- Single point emergency lowering
- Hourmeter
- Operator horn
- All motion alarm
- 360° Continuous turret rotation
- Tie down/lifting lugs
- 15 x 19.5 Grip lug foam-filled tires
- Telematics ready
- 2 Year Gold Leaf Warranty (5 year structural warranty)

Accessories†

Pipe rack	\$925
Glazier kit	\$1,050
Tool caddy	\$390

Options‡

36 x 72" Platform	N/C
3.5 kW generator	\$5,510
<small>(Includes hydraulic oil cooler)</small>	
Welder ready package	\$11,555
<small>(Includes 12 kW generator, hydraulic oil cooler, 3-phase power connection in platform, and welder mount)</small>	
Welder package	\$16,635
<small>(Includes 12 kW generator, hydraulic oil cooler, 3-phase power connection in platform, welder mount, and Lincoln V275-S welder)</small>	
Cold weather start kit*	\$2,565

*Recommended for regions where average monthly low temperatures can reach 14°F / -10°C

(Includes cold start engine oil, battery blanket, hydraulic tank heater, and engine load kit (Deutz TD2.9L4))

Arctic weather package*	\$3,865
-------------------------------	---------

*Recommended for regions where average monthly low temperatures can reach -0.4°F / -18°C

(Includes arctic engine oil, battery blanket, hydraulic tank heater, engine load kit (Deutz TD2.9L4), block heater, arctic hydraulic oil, arctic platform rotator and arctic gear oil in the axles and swing drive. Glow plugs, arctic hydraulic hoses (all), and oversized foot switch cover are also included (standard equipment).)

Hydraulic oil cooler	\$1,920
Side spring hinged entry gate	\$345
Flashing light	\$695
Auxiliary top rail (36 x 96" platform only)	\$1,040
Control box cover	\$815
Positive air shut-off valve (diesel only)	\$3,570
Bio oil	\$4,985
Non destructive testing	\$1,275
Grip lug foam-filled non marking tires	\$1,475

‡ Standard lead times may be increased when optional equipment is added, consult factory

** Capacities, and machine weights may differ when options are added



TELESCOPIC BOOM LIFTS | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020

SJ82 T..... \$242,380

- 82' (24.99 m) Platform height
- 500 / 750 lbs (227 / 341 kg) Dual capacity
- 72' 6" (22.10 m) Horizontal reach
- 170° Platform rotation
- 36" x 96" (0.91 x 2.4 m) Platform size

SJ86 T..... \$252,455

- 86' (26.21 m) Platform height
- 5' 6" (1.68 m) Jib
- 500 / 750 lbs (227 / 341 kg) Dual capacity
- 76' 10" (23.42 m) Horizontal reach
- 170° Platform rotation
- 36" x 96" (0.91 x 2.4 m) Platform size

Standard Features

- EASYDRIVE™ Direction sensing drive and steer controls
- AXLDRIIVE™ Axle-based 4WD system
- Operator controlled locking rear differential and limited slip front differential
- Oscillating steer axle
- Drivable at full height
- 45% Gradeability
- Wet disc SAHR brakes (front and rear axle)
- Relay based control system with SKYCODED™ color coded and numbered wiring
- Deutz TD2.9L4 diesel engine
- Swing out engine tray
- Swing up cowlings for easy access
- Lockable power disconnect switch
- Proportional controls
- 500 / 750 lbs Dual capacity
- 36" x 96" Platform
- Bolt-in platform railing system
- Lanyard attachment points
- Tri-entry sliding mid rails
- Secondary Guarding Electrical (SGE)
- Overload sensing system
- 110V AC Outlet on platform with GFI
- Tilt alarm (5.0° x 5.0°) with drive and lift cut-out
- Single point emergency lowering
- Hourmeter
- Operator horn
- All motion alarm
- 360° Continuous turret rotation
- Tie down/lifting lugs
- 18 x 625 Grip lug foam filled tires
- Telematics ready
- 2 Year Gold Leaf Warranty (5 year structural warranty)

Accessories†

Pipe rack	\$925
Glazier kit	\$1,050
Tool caddy	\$390

Options‡

36 x 72" Platform	N/C
3.5 kW generator	\$5,510
<small>(Includes hydraulic oil cooler)</small>	
Welder ready package	\$11,555
<small>(Includes 12 kW generator, hydraulic oil cooler, 3-phase power connection in platform, and welder mount)</small>	
Welder package	\$16,635
<small>(Includes 12 kW generator, hydraulic oil cooler, 3-phase power connection in platform, welder mount, and Lincoln V275-S welder)</small>	
Cold weather start kit*	\$2,565

*Recommended for regions where average monthly low temperatures can reach 14°F / -10°C

(Includes cold start engine oil, battery blanket, hydraulic tank heater, and engine load kit (Deutz TD2.9L4))

Arctic weather package*	\$3,865
-------------------------------	---------

*Recommended for regions where average monthly low temperatures can reach -0.4°F / -18°C

(Includes arctic engine oil, battery blanket, hydraulic tank heater, engine load kit (Deutz TD2.9L4), block heater, arctic hydraulic oil, arctic platform rotator and arctic gear oil in the axles and swing drive. Glow plugs, arctic hydraulic hoses (all), and oversized foot switch cover are also included (standard equipment).)

Hydraulic oil cooler	\$1,920
Flashing light	\$695
Hostile environment package	\$5,580
<small>(Includes cylinder bellows, boom wipers, covers for the fly boom cutouts, and control box cover)</small>	
Auxiliary top rail (36 x 96" platform only)	\$1,040
Control box cover	\$815
Side spring hinged entry gate	\$345
Lifting lugs	\$280
Positive air shut-off valve (diesel only)	\$3,570
Bio oil	\$4,975
Non destructive testing	\$1,275
Grip lug foam-filled non marking tires	\$1,490

‡ Standard lead times may be increased when optional equipment is added, consult factory

** Capacities, and machine weights may differ when options are added



ELEVATE | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020

DIRECT

Connects rental fleets directly to your rental software (ERP) to make maintenance and billing processes more efficient and effective with live machine data.

- Transmits data every 15 minutes
- Provides full history of machine activity and engine status (data varies by machine)
- Data delivered by Trackunit IRIS API
- **Data access requires existing ERP software.** (Data-only package)
- 12, 36, 60 month packages
- Elevate RAW 501-4 hardware (IP 67 rated, Powered by Trackunit)

ENGAGE

A full suite of tools to manage your connected fleet. In addition to direct data get Elevate Manager, GO, and ON apps deliver the benefits of connected machines to the service department and machine operators.

- **Elevate Manager and GO apps (powered by Trackunit)** Set alerts for machine operations or business rules to notify the right personnel in real time (SMS, Email)
- Generate up to the minute reports, giving you actionable insights to better your business
- **Elevate ON** provides a tool for digital pre-checks, familiarization, and operator usage reports. From the rental company to the operator, monitor and track efficiency, maintenance and safety.
- Transmits data every 2/15 minutes or on I/O (delivers full machine history)
- Provides full history of machine activity and engine status (data set varies by machine)
- Includes **Direct** data to ERP delivered by Trackunit IRIS API (supported existing ERP software required)
- 12, 36, 60 month packages
- Elevate RAW 501-4 hardware (IP 67 rated, Powered by Trackunit)

ENGAGE + ACCESS

Protect your assets and provide a safer worksite by adding access control to your fleet with Elevate Access. The Dual ID II keypad (powered by Trackunit) can limit access through PIN code, or RFID card to help make sure only properly trained personnel are operating your machines.

- Requires **Elevate Engage** Package and RAW 501-4 hardware
- Prevent machine ignition for non-credentialed personnel
- Limit machine access through PIN codes, or RFID cards (remotely programmable through Elevate Manager)
- Set auto expiring access codes to correspond to rental terms
- Dual ID II hardware is IP69 rated
- Works with IPAF PAL smart card for quick RFID access to machines

12 Month Plans

DIRECT	\$560
ENGAGE	\$630
ENGAGE + ACCESS.....	\$730

36 Month Plans

DIRECT	\$750
ENGAGE	\$890
ENGAGE + ACCESS.....	\$990

60 Month Plans

DIRECT	\$880
ENGAGE	\$1,090
ENGAGE + ACCESS.....	\$1,200





EXTENDED WARRANTY PLANS | LIST PRICING (USD) EFFECTIVE JANUARY 1ST, 2020

EXTENDED WARRANTY PLANS FOR NEW EQUIPMENT ONLY* LIST PRICING

	2 years / 3000 hours	3 years / 4000 hours	5 years / 5000 hours
SJ12, SJ16	n/c	\$565	\$930
SJ3215, SJ3219	n/c	\$565	\$930
SJ3220, SJ3226, SJ4726, SJ4732, SJ4740	n/c	\$815	\$1,350
SJ6826 RT, SJ6832 RT	n/c	\$1,845	\$3,075
SJ9233 RT, SJ9243 RT	n/c	\$2,850	\$4,750
SJ9253 RT	n/c	\$3,690	\$6,135
SJ30 AJE, SJ30 ARJE	n/c	\$2,750	\$4,575
SJ46 AJ+	n/c	\$3,520	\$5,865
SJ63 AJ+	n/c	\$5,140	\$8,555
SJ85 AJ	n/c	\$7,260	\$12,235
SJ40 T+, SJ45 T+	n/c	\$3,805	\$6,425
SJ61 T+, SJ66 T+	n/c	\$5,240	\$8,855
SJ82 T, SJ86 T	n/c	\$7,390	\$12,490
SJ519 TH	n/c	\$4,225	\$7,295
SJ643 TH	n/c	\$6,855	\$11,430
SJ843 TH	n/c	\$7,175	\$11,860
SJ1044 TH, SJ1056 TH	n/c	\$8,345	\$14,020
SJ1256 TH	n/c	\$9,975	\$16,455
ZB2044	n/c	\$15,640	\$26,050

*TERMS AND CONDITIONS:

Extended warranty applies to new machines only and follows the standard warranty policy and procedure for the machine(s) purchased. Extended warranties must be purchased at point of machinery purchase and may not be applied to units that have entered service.

SKYJACK STANDARD WARRANTY POLICY

SKYJACK INC., warrants that each new aerial work platform ("AWP") will be free of defective parts and workmanship for two years (24 months or 3,000 hours, whichever comes first) from the date the product was invoiced to the purchaser or from the date the product was first put into service, whichever comes first. For the following 36 months, structural components found to be defective will be replaced or repaired at no charge. For further clarity AWP Products include Scissor lifts and Boom Lifts.*

SKYJACK INC., warrants that each new Telehandler manufactured by Skyjack Inc. will be free of defective parts and workmanship for two years (24 months or 3,000 hours, whichever comes first) from the date the product was invoiced to the purchaser or from the date the product was first put into service, whichever comes first. For the following 36 months structural components found to be defective will be replaced or repaired at no charge.*

All warranty claims are subject to approval by Skyjack's Service Department. Skyjack Inc. reserves a right to limit or adjust claims with regard to defective parts, labor or travel time based on usual and customary guidelines. Parts purchased from sources other than Skyjack will not be covered under this warranty. Misuse or improper operation, lack of normal maintenance and inspections as outlined in the Operating Manual, Parts Manual or Service Manual, alterations to original designs and/or components or accidents will void all warranty. Batteries, wear items and engines are not covered by this warranty. Any claims, should refer to the manufactures warranties. Electrical failures due to loose wiring, corrosion & poor maintenance are not covered by this warranty.

*SKYJACK INC. will repair or replace, at it's option, the defective part or workmanship at its factory or authorized service center. The above warranty statement is exclusive and no other warranty whether written, oral or implied shall apply. Skyjack Inc. excludes any implied warranty of merchantability and fitness and accepts no liability for consequential damages or for others negligence.