

reutlon1 T79CWW161FRW023 TMS
 12/5/2018 9:08:56 AM
 \\p81.ad.dot.state.mn.us:cddp\Documents\Projects\DM_R05\Non_Project\Fr00ps\Detail\Drawings\CAB_LOOP_MISC\cab_loop_misc.dtl.dwg

NOTE:
 EACH INSTALL DMS ITEM SHALL INCLUDE THE
 INSTALLATION OF A 15' ONE PIECE GROUND
 ROD AND THE INSTALLATION OF THE 7/16"
 GROUNDING BRAID STRAPPED TO THE POWER
 CONDUIT OR SIGN POST AS INDICATED


THE DMS GROUNDING BRAID WILL BE CONTINUOUS
 FROM THE DMS GROUND LUG, THROUGH THE GROUND
 ROD EXOTHERMICAL WELD, TO THE INTERNAL SIGN
 POST GROUND LUG WHEN APPLICABLE

STRAP GROUNDING BRAID TO POST OR CONDUIT
 AWAY FROM VIEW OF TRAFFIC.


DMS GROUNDING BRAID IS CONSTRUCTED OF
 32 STRANDS OF 17 GAUGE TINNED COPPER WIRE, 7/16"
 DIAMETER, BRAIDED SMOOTH TWIST,
 65,500 CIRCULAR MILLS,
 NET WEIGHT 215 LBS. PER 1000 FT.

JUNCTION BOXES MAY BE NECESSARY DEPENDING
 ON CONDUIT CONFIGURATIONS. SEE PLAN NOTES.

GALVANIZED
 TYPE C CONDUIT BODY
 W/COVER & GASKET
 NOTE: FACE COVER
 TOWARDS WALKWAY
 (INCIDENTAL)

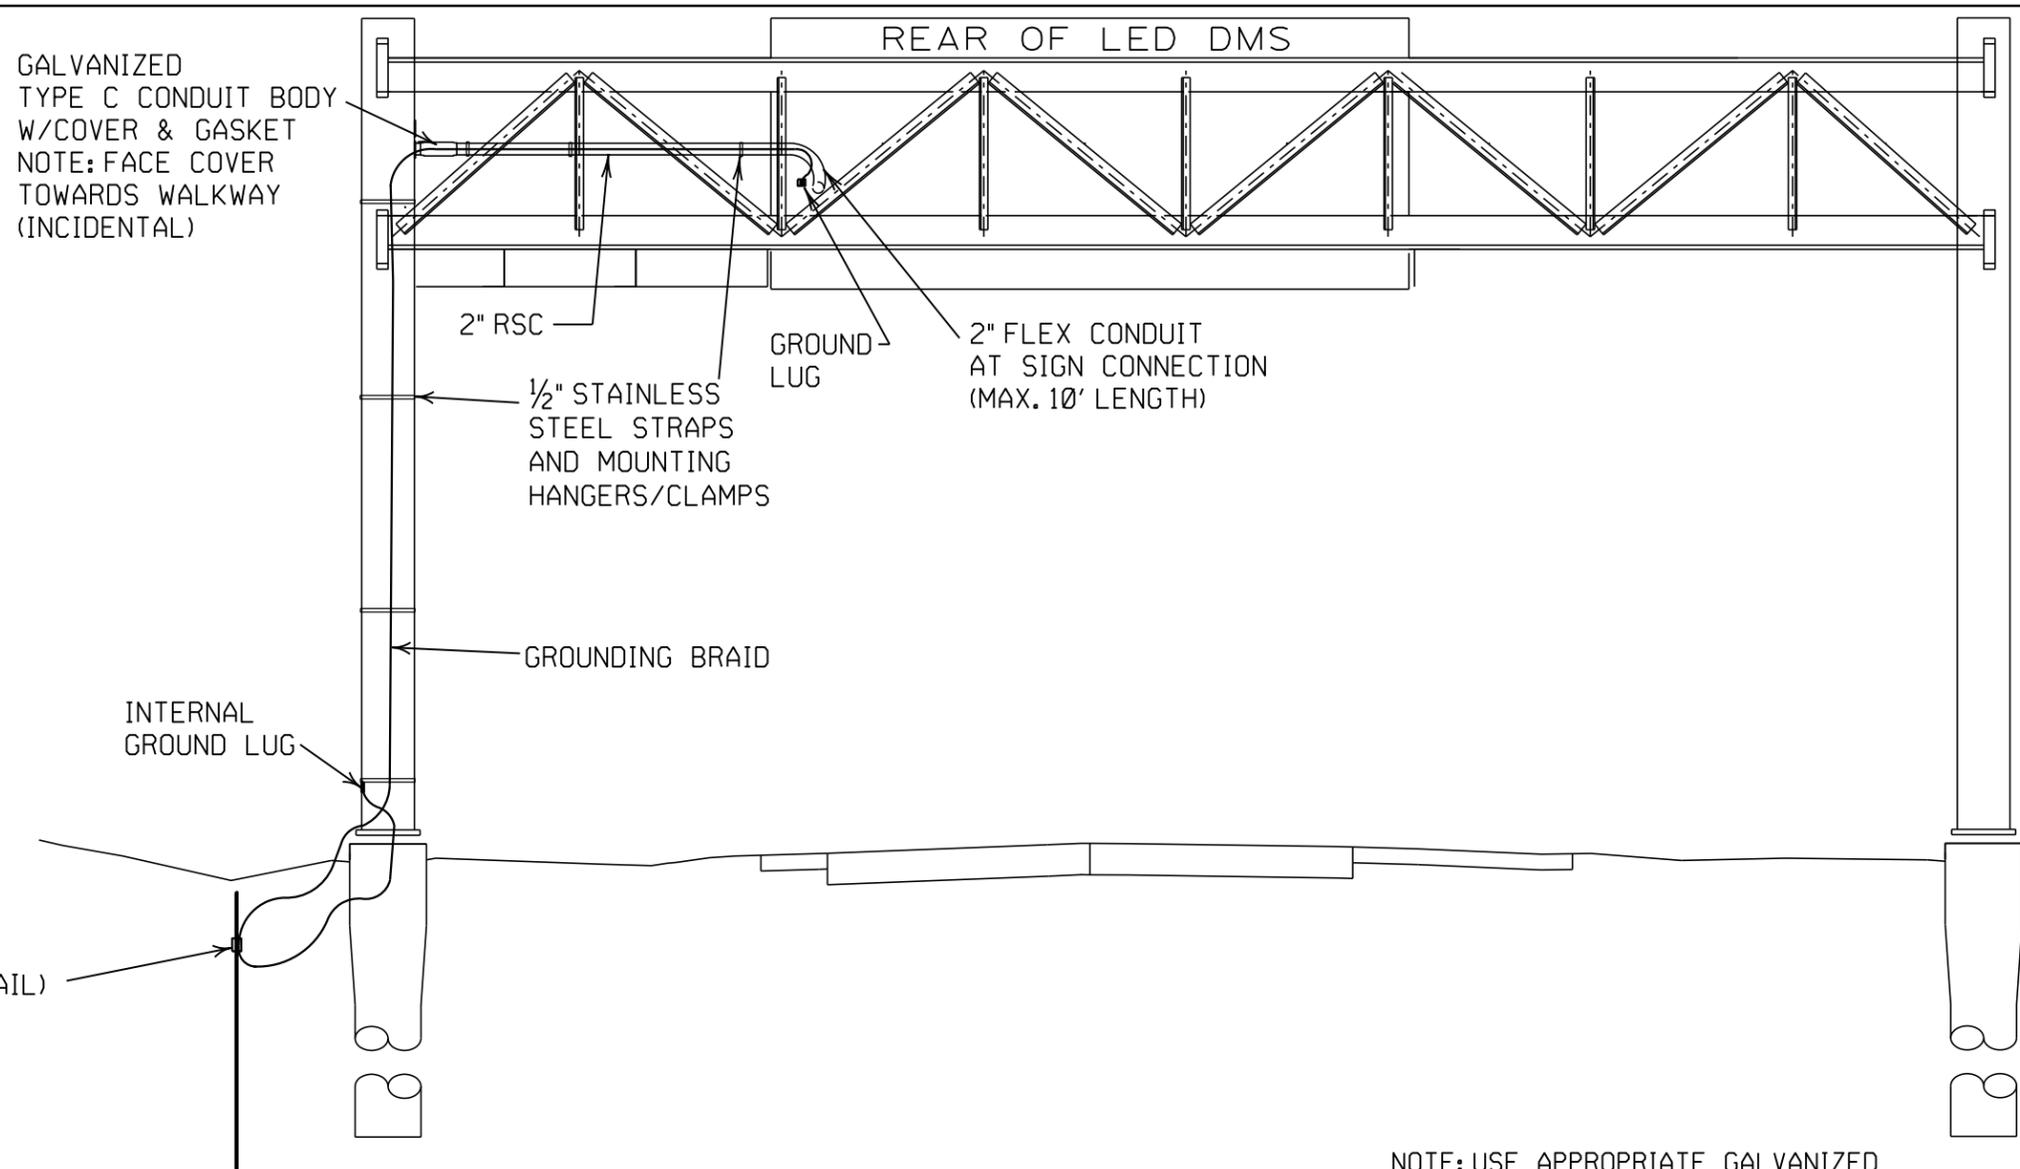

NOTE: USE APPROPRIATE GALVANIZED
 CONDUIT BODIES W/COVERS FOR
 CORNERS/BENDS AT ABUTMENTS
 AND BEAMS (INCIDENTAL)

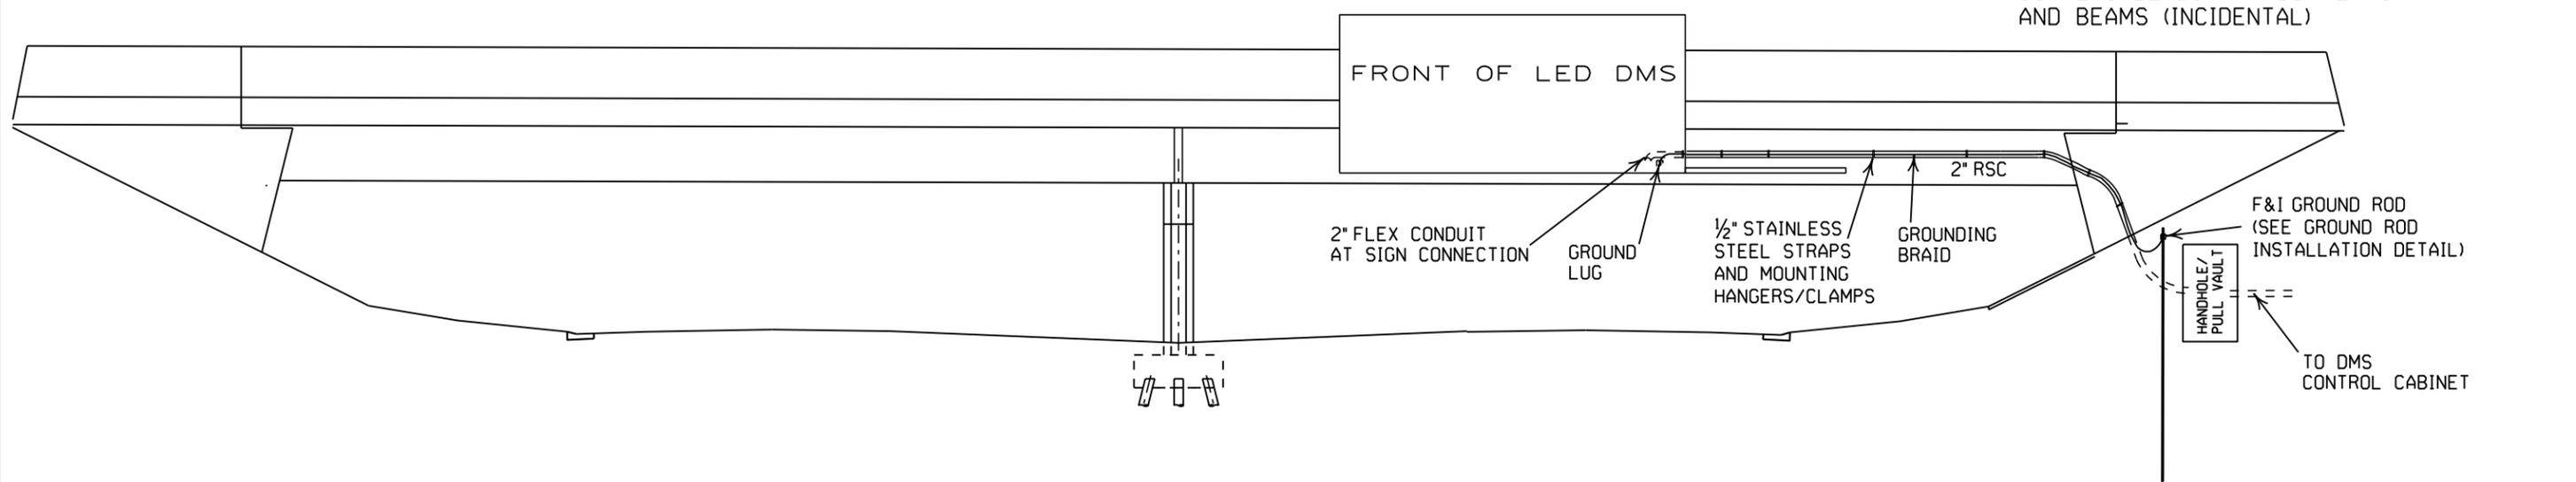

DMS GROUNDING/INSTALLATION
 TYPICAL

REVISED 6/27/18

REV. NO.	DATE: / /	CERTIFIED BY _____	LIC. NO. 12345	DATE 2018	STATE PROJ. NO. XXXX-XXX (TH XXX)	SHEET NO. XXXX?	OF XXXXX SHEETS
REV. NO.	DATE: / /						