

UNDERWATER BRIDGE INSPECTION REPORT

STRUCTURE NO. 57502
CSAH NO. 24
OVER THE
RED LAKE RIVER
DISTRICT 2 - PENNINGTON COUNTY



AUGUST 27, 2012
PREPARED FOR THE
MINNESOTA DEPARTMENT OF TRANSPORTATION
BY
AYRES ASSOCIATES & COLLINS ENGINEERS, INC.
JOB NO. 7423

MINNESOTA DEPARTMENT OF TRANSPORTATION
UNDERWATER BRIDGE INSPECTION

REPORT SUMMARY:

The substructure units inspected at Bridge 57502, Piers 1 and 2, were in good condition with no defects of structural significance observed. The channel bottom appeared stable with no evidence of scour or appreciable changes since the previous inspection.

INSPECTION FINDINGS:

- (A) The concrete was smooth and sound with random minor areas of poor consolidation with up to ¼ inch penetration on the faces of Piers 1 and 2.
- (B) Minor scaling was observed from the channel bottom to 5 feet above the waterline (bottom of hammerhead pier cap) with up to ¼ inch maximum penetration on the upstream noses of Piers 1 and 2.
- (C) The channel bottom material around Pier 1 consisted of sand with 3 inches of maximum probe rod penetration; and around Pier 2, the bottom consisted of silty sand with 12 inches of maximum probe rod penetration.

RECOMMENDATIONS:

- (A) Reinspect the submerged substructure units at the normal maximum recommended (NBIS) interval of sixty (60) months.

Inspection Team Leader

Ayres Associates, Inc.



Brian K. Schroeder
Registered Professional Engineer
State of Minnesota

Respectfully submitted,


PROFESSIONAL ENGINEER

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the State of Minnesota.

Daniel G. Stromberg

Date 6/30/14 License # 21491

COLLINS ENGINEERS, INC.

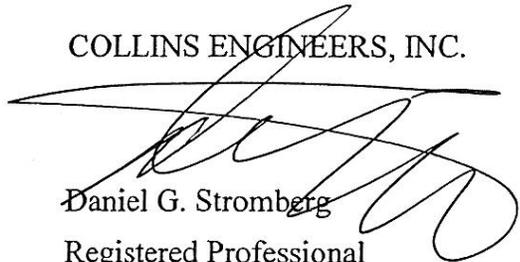

Daniel G. Stromberg

Registered Professional

Engineer, State of Minnesota

MINNESOTA DEPARTMENT OF TRANSPORTATION
UNDERWATER BRIDGE INSPECTION

1. BRIDGE DATA

Bridge Number: 57502

Feature Crossed: The Red Lake River

Feature Carried: CSAH No. 24

Location: District 2 - Pennington County

Bridge Description: The superstructure consists of three spans of multiple steel beams supporting a reinforced concrete deck. The superstructure is supported by two concrete abutments and two concrete piers, with the piers numbered 1 and 2 starting from the south end of the bridge.

2. INSPECTION DATA

Professional Engineer Diver: Brian K. Schroeder, P.E.

Dive Team: Jason A. Cook, Anthony J. Coffaro

Date: August 27, 2012

Weather Conditions: Partly Cloudy, 69° F

Underwater Visibility: 2.0 feet

Waterway Velocity: 1.5 ft/sec

3. SUBSTRUCTURE INSPECTION DATA

Substructure Inspected: Piers 1 and 2

General Shape: The piers consist of an oblong rectangular concrete shaft with rounded noses supporting a hammerhead pier cap. Design plans with foundation information were not available.

Maximum Water Depth at Substructure Inspected: Approximately 1.8 feet.

4. WATERLINE DATUM

Water Level Reference: The top of the pier cap on the west side of Pier 2.

Water Surface: The waterline was approximately 13.5 feet below reference.
Assumed Waterline Elevation = 86.5.

5. NBIS CODING INFORMATION (Minnesota specific codes are used for 92B and 113)

Item 60: Substructure: Code 7

Item 61: Channel and Channel Protection: Code 8

Item 92B: Underwater Inspection: Code A/08/12

Item 113: Scour Critical Bridges: Code I/94

Bridge is scour critical because abutment or pier foundation is rated as unstable due to observed scour at bridge site.

 Yes X No

6. STRUCTURAL ELEMENT CONDITION RATING

Item #	Element Description	Quantity	Unit	Conditions				
				1	2	3	4	5
205	Reinforced Concrete Column	2	EA		2			
985	Slopes and Slope Protection	1	EA	1				





Photograph 1. Overall View of the Structure, Looking East.



Photograph 2. View of Pier 1, Looking South.



Photograph 3. View of Pier 2, Looking South.

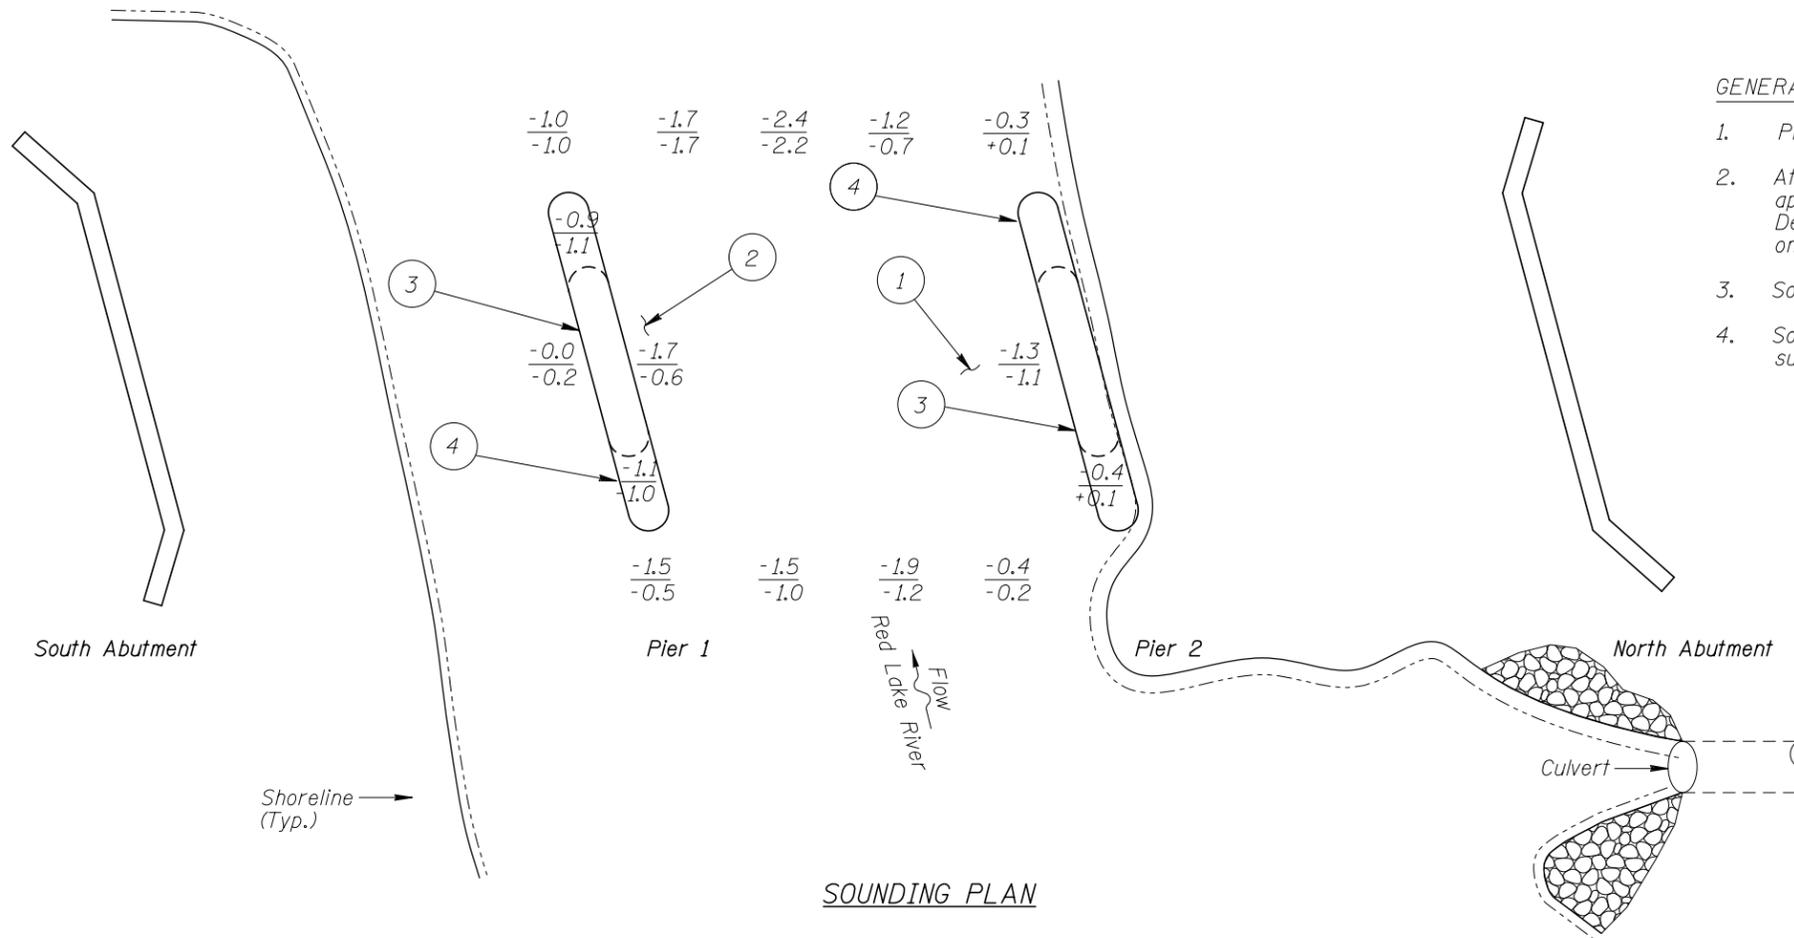

GENERAL NOTES:

1. Piers 1 and 2 were inspected underwater.
2. At the time of inspection on August 27, 2012 the waterline was located approximately 13.5 feet below the top of the pier cap on the downstream end of Pier 2. Design plans were not available, therefore a reference of 100.0 was assumed. Based on the assumed reference the waterline elevation was 86.5.
3. Soundings indicate the water depth at the time of inspection and are measured in feet.
4. Soundings were taken parallel to the bridge at 1/4 point intervals between the substructure units.

INSPECTION NOTES:

- 1 The channel bottom material around Pier 2 consisted of silty sand with up to 12 inches maximum probe rod penetration.
- 2 The channel bottom material around Pier 1 consisted of sand with 3 inches of maximum probe rod penetration.
- 3 The concrete was typically smooth and sound with random minor areas of poor consolidation with up to 1/4 inch penetration on the faces of Piers 1 and 2.
- 4 Minor scaling was observed from the channel bottom to 5 feet above the waterline (bottom of hammerhead pier cap) with up to 1/4 inch maximum penetration on the upstream noses of Piers 1 and 2.

Legend


- 2.0 Sounding Depth (8/27/12)
- 5.2 Sounding Depth (8/18/07)

Timber Debris

Riprap

Note:


All soundings based on 2012 waterline location.




TYPICAL END VIEW OF PIERS

MINNESOTA DEPARTMENT OF TRANSPORTATION UNDERWATER BRIDGE INSPECTION		
STRUCTURE NO. 57502 OVER THE RED LAKE RIVER DISTRICT 2, PENNINGTON COUNTY		
INSPECTION AND SOUNDING PLAN		
Drawn By: JAC		Date: SEPT, 2012
Checked By: BKS	<small>3433 Oakwood Hills Parkway Eau Claire, WI 54701 www.AyresAssociates.com</small>	Scale: NTS
Code: 52210163		Figure No.: 1

COLLINS ENGINEERS
123 North Wacker Drive
Suite 300
Chicago, IL 60606
(312) 704-9300
www.collinsengr.com

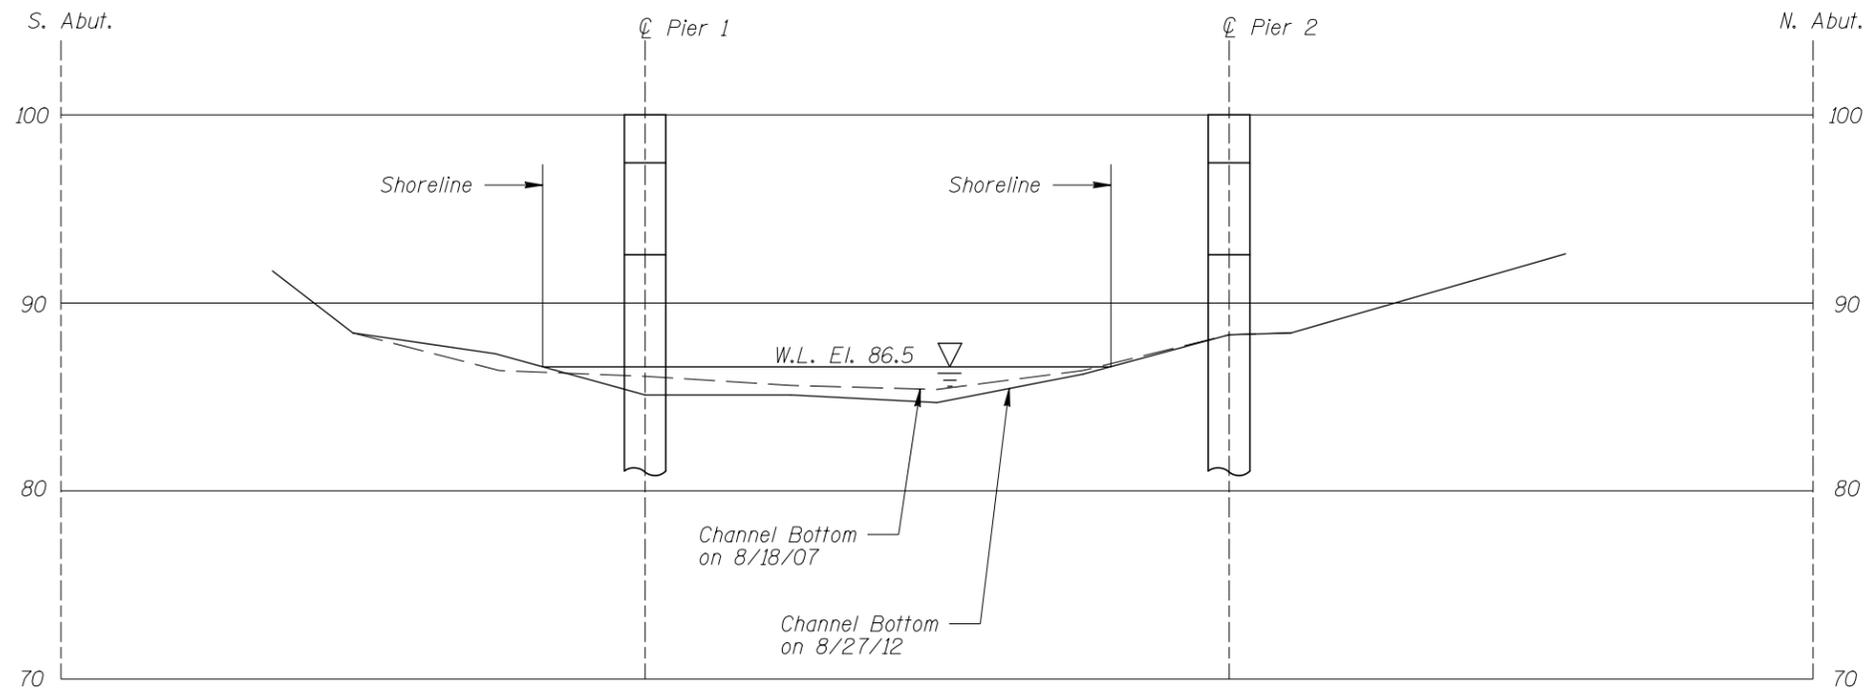

UPSTREAM FASCIA PROFILE
Vertical Scale: 1"=10'-0"

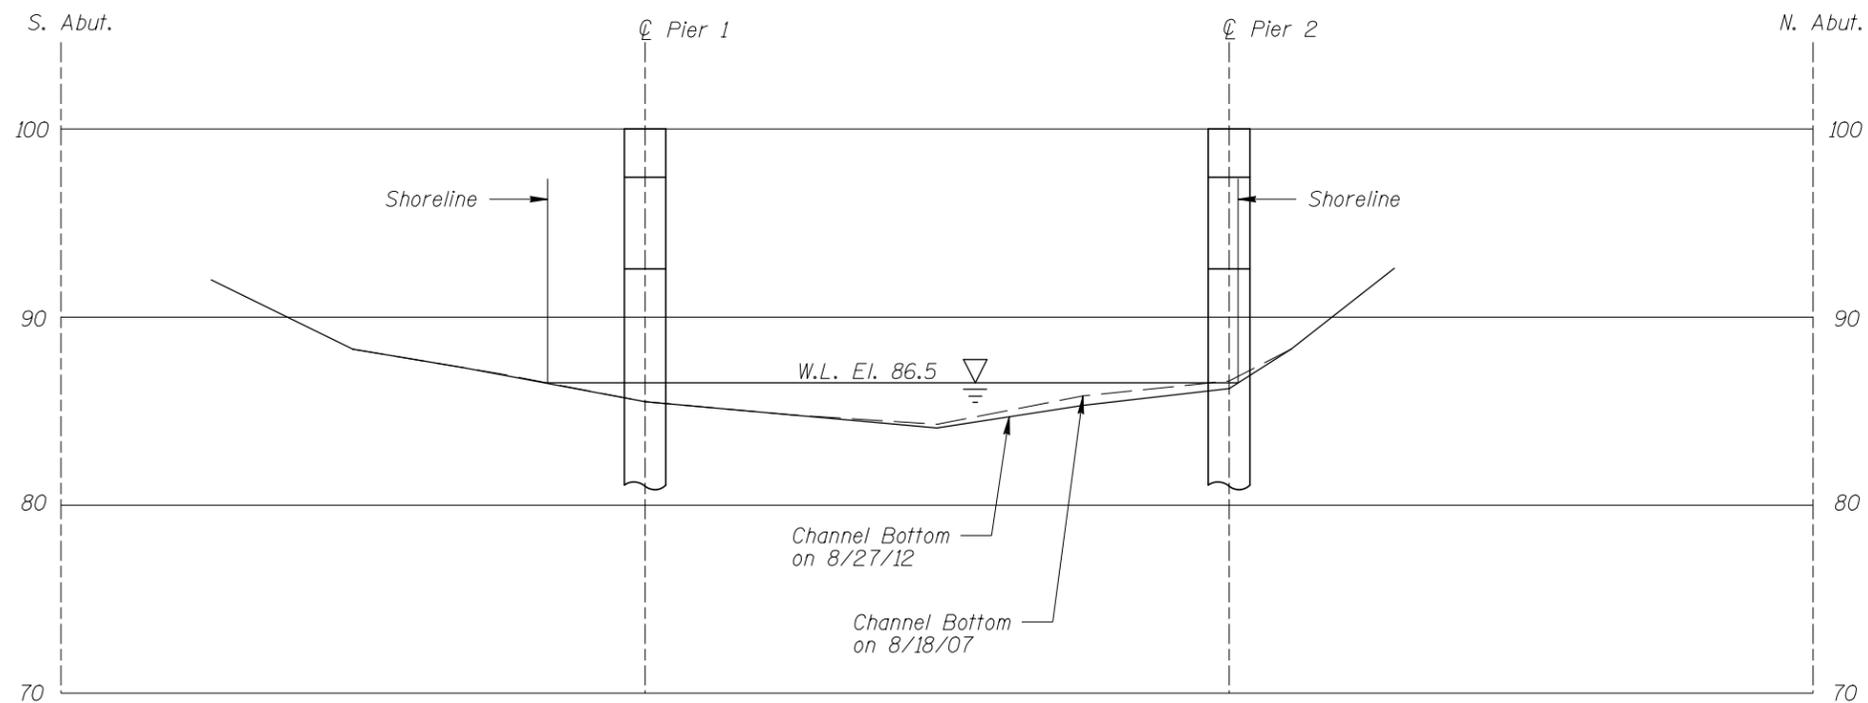

DOWNSTREAM FASCIA PROFILE
Vertical Scale: 1"=10'-0"

Note:
Refer to Figure 1 for General Notes.

MINNESOTA DEPARTMENT OF TRANSPORTATION UNDERWATER BRIDGE INSPECTION		
STRUCTURE NO. 57502 OVER THE RED LAKE RIVER DISTRICT 2, PENNINGTON COUNTY		
UPSTREAM AND DOWNSTREAM FASCIA PROFILES		
Drawn By: JAC	AYRES ASSOCIATES <small>3433 Oakwood Hills Parkway Eau Claire, WI 54701 www.AyresAssociates.com</small>	Date: SEPT, 2012
Checked By: BKS		Scale: NTS (U.O.N.)
Code: 52210163		Figure No.: 2

COLLINS ENGINEERS
123 North Wacker Drive
Suite 300
Chicago, IL 60606
(312) 704-9300
www.collinsengr.com

MINNESOTA DEPARTMENT OF TRANSPORTATION
OFFICE OF BRIDGES AND STRUCTURES
DAILY DIVING REPORT

INSPECTORS: Ayres Associates DATE: August 27, 2012

ON-SITE TEAM LEADER: Brian K. Schroeder, P.E.

BRIDGE NO: 57502 WEATHER: Partly Cloudy, 69 ° F

WATERWAY CROSSED: Red Lake River

DIVING OPERATION: _____ SCUBA _____ SURFACE SUPPLIED AIR
 OTHER Wade

PERSONNEL: Jason A. Cook, Anthony J. Coffaro

EQUIPMENT: Waders, U/W Light, Hammer, Sounding Pole, Probe Rod, Camera

TIME IN WATER: 9:35 A.M.

TIME OUT OF WATER: 10:00 A.M.

WATERWAY DATA: VELOCITY 1.0 ft/sec

VISIBILITY 2.0 feet

DEPTH 1.8 feet maximum at Piers 1 and 2.

ELEMENTS INSPECTED: Pier 1 and Pier 2

REMARKS: Overall, the concrete was smooth and sound with random minor areas of poor consolidation with up to ¼ inch penetration on the faces of both piers. Minor scaling was observed from the channel bottom to 5 feet above the waterline (bottom of hammerhead pier cap) with up to ¼ inch maximum penetration on the upstream noses of Piers 1 and 2. The channel bottom material around Pier 1 consisted of sand with 3 inches of maximum probe rod penetration; and around Pier 2, it consisted of silty sand with 12 inches of maximum probe rod penetration.

FURTHER ACTION NEEDED: _____ YES NO

Reinspect the submerged substructure units at the normal maximum recommended (NBIS) interval of sixty (60) months.

MINNESOTA DEPARTMENT OF TRANSPORTATION
OFFICE OF BRIDGES AND STRUCTURES

UNDERWATER INSPECTION CONDITION RATING FORM

BRIDGE NO. 57502
 INSPECTORS Ayres Associates
 ON-SITE TEAM LEADER Brian K. Schroeder, P.E.
 WATERWAY CROSSED Red Lake River

INSPECTION DATE August 27, 2012
 NOTE: USE ALL APPLICABLE CONDITION DEFINITIONS AS DEFINED IN THE MINNESOTA RECORDING AND CODING GUIDE INCLUDING GENERAL, SUBSTRUCTURE, CHANNEL AND PROTECTION, AND CULVERTS AND WALL DEFINITIONS TO COMPLETE THIS FORM.

CONDITION RATING

UNIT REFERENCE NO.	UNIT DESCRIPTION	MAXIMUM DEPTH OF WATER	SUBSTRUCTURE						CHANNEL					GENERAL					
			PILING	COLUMNS, SHAFTS, OR FACES*	FOOTINGS	DISPLACEMENT	OTHER (BRACING)	OVERALL SUBSTRUCTURE CONDITION CODE*	SCOUR	EMBANKMENT EROSION	EMBANKMENT PROTECTION	OTHER (DRIFT/DEBRIS)	OVERALL CHANNEL & PROTECTION CONDITION	CONCRETE	STEEL	TIMBER	LOSS OF SECTION	PREVIOUS REPAIR OR MAINTENANCE	OTHER
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Pier 1	1.8'	N	7	N	9	N	7	8	8	8	N	8	7	N	N	N	N	N
	Pier 2	1.3'	N	7	N	9	N	7	8	8	8	N	8	7	N	N	N	N	N

*UNDERWATER PORTION ONLY

REMARKS: Overall, the concrete was smooth and sound with random minor areas of poor consolidation with up to ¼ inch penetration on the faces of both piers. Minor scaling was observed from the channel bottom to 5 feet above the waterline (bottom of hammerhead pier cap) with up to ¼ inch maximum penetration on the upstream noses of Piers 1 and 2. The channel bottom material around Pier 1 consisted of sand with 3 inches of maximum probe rod penetration; and around Pier 2, it consisted of silty sand with 12 inches of maximum probe rod penetration.

NOTES: ATTACH SKETCHES AS NEEDED, IDENTIFY REMARK BY REFERRING TO UNIT REFERENCE NO. AND REMARK NO. USE GENERAL SECTION TO IDENTIFY OVERALL PRESENCE OF SPALLS, CRACKS, CORROSION, ETC.