

**PART 2. SIGNS**  
**Chapter 2C. Warning Signs and Object Markers**  
**TABLE OF CONTENTS**

<b>Chapter 2C.</b>	<b>WARNING SIGNS</b>	<b>Page</b>
Section 2C.1	Function of Warning Signs . . . . .	2C-1
2C.2	Application of Warning Signs . . . . .	2C-1
2C.3	Design of Warning Signs . . . . .	2C-1
2C.4	Size of Warning Signs . . . . .	2C-6
2C.5	Placement of Warning Signs . . . . .	2C-6
2C.6	Horizontal Alignment Warning Signs . . . . .	2C-8
2C.7	Horizontal Alignment Signs (W1-1 through W1-5, W1-11, W1-15) . . . . .	2C-8
2C.8	Advisory Speed Plaque (W13-1P) . . . . .	2C-10
2C.9	Chevron Alignment Sign (W1-8) . . . . .	2C-11
2C.10	Combination Horizontal Alignment/Advisory Speed Signs (W1-1a, W1-2a) . . . . .	2C-11
2C.11	Combination Horizontal Alignment/Intersection Signs (W1-10 Series) . . . . .	2C-12
2C.12	One-Direction Large Arrow Sign (W1-6) . . . . .	2C-12
2C.13	Truck Rollover Warning Sign (W1-13) . . . . .	2C-13
2C.14	Advisory Exit and Ramp Speed Signs (W13-2, W13-3) . . . . .	2C-13
2C.15	Combination Horizontal Alignment/Advisory Exit and Ramp Speed Signs (W13-6, W13-7) . . . . .	2C-14
2C.16	Hill Signs (W7-1, W7-1a) . . . . .	2C-14
2C.17	Truck Escape Ramp Signs (W7-4 Series) . . . . .	2C-16
2C.18	HILL BLOCKS VIEW Sign (W7-6) . . . . .	2C-16
2C.19	ROAD NARROWS Sign (W5-1) . . . . .	2C-16
2C.20	NARROW BRIDGE Sign (W5-2) . . . . .	2C-17
2C.21	ONE LANE BRIDGE Sign (W5-3) . . . . .	2C-17
2C.22	Divided Highway Sign (W6-1) . . . . .	2C-17
2C.23	Divided Highway Ends Sign (W6-2) . . . . .	2C-17
2C.24	Freeway or Expressway Ends Signs (W19 Series) . . . . .	2C-18
2C.25	Double Arrow Sign (W12-1) . . . . .	2C-18
2C.26	DEAD END/NO OUTLET Signs (W14-1, W14-1a, W14-2, W14-2a) . . . . .	2C-18
2C.27	Low Clearance Signs (W12-2, W12-2a, W12-X2) . . . . .	2C-19
2C.28	BUMP and DIP Signs (W8-1, W8-1a, W8-1b, W8-2) . . . . .	2C-19
2C.29	SPEED HUMP Sign (W17-1) . . . . .	2C-20
2C.30	PAVEMENT ENDS Sign (W8-3) . . . . .	2C-20
2C.31	Shoulder Signs (W8-4, W8-9, W8-17, W8-23, W8-25, W5-X1) . . . . .	2C-20
2C.32	Surface Condition Signs (W8-5, W8-7, W8-8, W8-11, W8-13, W8-14) . . . . .	2C-21
2C.33	Warning Signs and Plaques for Motorcyclists (W8-15, W8-15P, W8-16) . . . . .	2C-21
2C.34	NO CENTER LINE Sign (W8-12) . . . . .	2C-22
2C.35	Weather Condition Signs (W8-18, W8-19, W8-21, W8-22) . . . . .	2C-22
2C.36	Advance Traffic Control Signs (W3-1, W3-2, W3-3, W3-4, W3-X2, W3-X4) . . . . .	2C-23
2C.37	Advance Ramp Control Signal Signs (W3-7, W3-8) . . . . .	2C-23
2C.38	Reduced Speed Limit Ahead Signs (W3-5, W3-5a) . . . . .	2C-24
2C.39	DRAW BRIDGE Sign (W3-6) . . . . .	2C-24
2C.40	Merge Signs (W4-1, W4-5) . . . . .	2C-24
2C.41	Added Lane Signs (W4-3, W4-6) . . . . .	2C-25

	Page
Section 2C.42	Lane Ends Signs (W4-2, W9-1, W9-2) . . . . . 2C-25
2C.43	RIGHT (LEFT) LANE EXIT ONLY AHEAD Sign (W9-7) . . . . . 2C-25
2C.44	Two-Way Traffic Sign (W6-3) . . . . . 2C-26
2C.45	NO PASSING ZONE Sign (W14-3) . . . . . 2C-26
2C.46	Intersection Warning Signs (W2-1 through W2-8) . . . . . 2C-26
2C.47	Two-Direction Large Arrow Sign (W1-7) . . . . . 2C-27
2C.48	Traffic Signal Signs (W25-1, W25-2) . . . . . 2C-28
2C.49	Vehicular Traffic Warning Signs (W8-6, W11-1, W11-5, W11-5a, W11-6, W11-8, W11-10, W11-11, W11-12P, W11-14, W11-15, W11-15a, W11-15P) . . . . . 2C-28
2C.50	Non-Vehicular Warning Signs (W11-2, W11-3, W11-4, W11-7, W11-9, W11-16 through W11-22) . . . . . 2C-29
2C.51	Playground Sign (W15-1) . . . . . 2C-31
2C.52	NEW TRAFFIC PATTERN AHEAD Sign (W23-2) . . . . . 2C-31
2C.53	Use of Supplemental Warning Plaques . . . . . 2C-31
2C.54	Design of Supplemental Warning Plaques . . . . . 2C-31
2C.55	Distance Plaques (W16-2 series, W16-3 series, W16-4P, W7-3aP) . . . . . 2C-32
2C.56	Supplemental Arrow Plaques (W16-5P, W16-6P) . . . . . 2C-32
2C.57	Hill-Related Plaques (W7-2 series, W7-3 series) . . . . . 2C-32
2C.58	Advance Street Name Plaque (W16-8P, W16-8aP) . . . . . 2C-32
2C.59	CROSS TRAFFIC DOES NOT STOP Plaque (W4-4P Series) . . . . . 2C-33
2C.60	SHARE THE ROAD Plaque (W16-1P) . . . . . 2C-33
2C.61	PHOTO ENFORCED Plaque (W16-10P) . . . . . 2C-34
2C.62	NEW Plaque (W16-15P) . . . . . 2C-34
2C.63	Object Marker Design and Placement Height . . . . . 2C-34
2C.64	Object Markers for Obstructions Within the Roadway . . . . . 2C-35
2C.65	Object Markers for Obstructions Adjacent to the Roadway . . . . . 2C-36
2C.66	Object Markers for Ends of Roadways . . . . . 2C-36

## FIGURES

Page

Figure 2C-1	This figure has been eliminated	
Figure 2C-2	Example of Warning Signs for a Turn. . . . .	2C-9
Figure 2C-3	Example of Advisory Speed Signing for an Exit Ramp . . . . .	2C-15
Figure 2C-4	This figure has been eliminated	
Figure 2C-5	This figure has been eliminated	
Figure 2C-6	This figure has been eliminated	
Figure 2C-7	This figure has been eliminated	
Figure 2C-8	This figure has been eliminated	
Figure 2C-9	This figure has been eliminated	
Figure 2C-10	This figure has been eliminated	
Figure 2C-11	This figure has been eliminated	
Figure 2C-12	This figure has been eliminated	
Figure 2C-13	Object Markers . . . . .	2C-35

## TABLES

Table 2C-1	Categories of Warning Signs. . . . .	2C-2
Table 2C-2	Warning Sign and Plaque Sizes (sheet 1 of 3) . . . . .	2C-3
Table 2C-2	Warning Sign and Plaque Sizes (sheet 2 of 3) . . . . .	2C-4
Table 2C-2	Warning Sign and Plaque Sizes (sheet 3 of 3) . . . . .	2C-5
Table 2C-3	Minimum Size of Supplemental Warning Plaques . . . . .	2C-6
Table 2C-4	Guidelines for Advance Placement of Warning Signs . . . . .	2C-7
Table 2C-5	Horizontal Alignment Sign Selection . . . . .	2C-10
Table 2C-6.	Typical Spacing of Chevron Alignment Signs on Horizontal Curves . . . . .	2C-11

MN Rev. 4

## PART 2. SIGNS

### Chapter 2C. Warning Signs and Object Markers

#### 2C.1 Function of Warning Signs

##### **SUPPORT:**

Warning signs call attention to unexpected conditions on or adjacent to a highway, street, or private roads open to public travel and to situations that might not be readily apparent to road users. Warning signs alert road users to conditions that might call for a reduction of speed or an action in the interest of safety and efficient traffic operations.

#### 2C.2 Application of Warning Signs

##### **STANDARD:**

The use of warning signs shall be based on an engineering study or on engineering judgment.

##### **GUIDANCE:**

The use of warning signs should be kept to a minimum as the unnecessary use of warning signs tends to breed disrespect for all signs. In situations where the condition or activity is seasonal or temporary, the warning sign should be removed or covered when the condition or activity does not exist.

##### **OPTION:**

Consistent with the provisions of Chapter 2L, changeable message signs may be used to display a warning message.

Consistent with the provisions of Chapter 4L, a Warning Beacon may be used in combination with a standard warning sign.

##### **SUPPORT:**

The categories of warning signs are shown in Table 2C-1.

Warning signs specified provided herein in this Manual cover most of the conditions that are likely to be encountered. Additional warning signs for low-volume roads (as defined in Section 5A.1), temporary traffic control zones, school areas, highway-rail grade crossings, and bicycle facilities, and highway-light rail transit grade crossings are discussed in Parts 5 through 9, respectively.

Section 1A.9 contains information regarding the assistance that is available to jurisdictions that do not have engineers on their staffs who are trained and/or experienced in traffic control devices.

#### 2C.3 Design of Warning Signs

##### **STANDARD:**

Except as provided in the following Option or unless specifically designated otherwise, all warning signs shall be diamond-shaped (square with one diagonal vertical) with a black legend and border on a yellow background. Warning signs shall be designed in accordance with sizes, shapes, colors, and legends contained in the MnDOT "Standard Signs Manual" (see Map & Manual Sales Unit, page ii), and the FHWA "Standard Highway Signs and Markings" book (see Section 1A.11).

##### **OPTION:**

A warning sign that is larger than the size shown in the Oversized column in Table 2C-2 for that particular sign may be diamond-shaped or may be rectangular or square in shape.

Except for symbols on warning signs, minor modifications may be made to the design provided that the essential appearance characteristics are met. Modifications may be made to the symbols shown on combined horizontal alignment/intersection signs (see Section 2C.11) and intersection warning signs (see Section 2C.46) in order to approximate the geometric configuration of the intersecting roadway(s).

Word message warning signs other than those provided in this Manual may be developed and installed by State and local highway agencies

Warning signs regarding conditions associated with pedestrians, bicyclists, and playgrounds may have a black legend and border on a yellow or fluorescent yellow-green background.

##### **STANDARD:**

Warning signs regarding conditions associated with school buses and schools and their related supplemental plaques shall have a black legend and border on a fluorescent yellow-green background (see Section 7B.7).

Category	Group	Section	Signs or Plaques	Sign Designations	
Roadway Related	Changes in Horizontal Alignment	2C.7	Turn, Curve, Reverse Turn, Reverse Curve, Winding Road, Hairpin Curve, 270-Degree Curve	W1-1,2,3,4,5,11,15	
		2C.8	Advisory Speed	W13-1P	
		2C.9	Chevron Alignment	W1-8	
		2C.10	Combination Horizontal Alignment/Advisory Speed	W1-1a,2a	
		2C.11	Combination Horizontal Alignment/Intersection	W1-10,10a,10b,10c,10d	
		2C.12	Large Arrow (one direction)	W1-6	
		2C.13	Truck Rollover	W1-13	
		2C.14	Advisory Exit or Ramp Speed	W13-2,-3	
	Vertical Alignment	2C.15	Combination Horizontal Alignment Advisory Exit or Ramp Speed	W13-6,7	
		2C.16	Hill	W7-1,1a,2P,2bP, 3P,3aP,3bP	
		2C.17	Truck Escape Ramp	W7-4,4b,4c,4dP,4eP,4fP	
	Cross Section	2C.18	Hill Blocks View	W7-6	
		2C.19	Road Narrows	W5-1	
		2C.20,21	Narrow Bridge, One Lane Bridge	W5-2,3	
		2C.22,23,25	Divided Road, Divided Road Ends, Double Arrow	W6-1,-2, W12-1	
		2C.24	Freeway or Expressway Ends, All Traffic Must Exit	W19-1,2,3,4,5	
		2C.26	Dead End, No Outlet	W14-1,1a,2,2a	
		2C.27	Low Clearance	W12-2,2a	
			2C.28,29	Bump, Dip, Speed Hump	W8-1,2, W17-1
	2C.30		Pavement Ends	W8-3	
	2C.31		Shoulder, Uneven Lanes	W8-4,9,11,17,17P,23,25	
	2C.32		Slippery When Wet, Loose Gravel, Rough Road, Bridge Ices Before Road, Falling Rocks	W8-5,7,8,13,14,	
	2C.33		Grooved Pavement, Metal Bridge Deck	W8-15,15P,16	
	2C.34		No Center Line	W8-12	
	Weather	2C.35	Road May Flood, Flood Gauge, Gusty Winds Area, Fog Area	W8-18,19,21,22	
	Traffic Related	Advance Traffic Pattern	2C.36-39	Stop Ahead, Yield Ahead, Signal Ahead, Be Prepared To Stop, Speed Reduction, Drawbridge Ahead, Ramp Meter Ahead	W3-1,2,3,4,5,5a,6,7,8
		Traffic Flow	2C.40-45	Merge, No Merge Area, Lane Ends, Added Lane, Two-Way Traffic,	W4-1,2,3,5,5P,6; W6-3;
				Right Lane Exit Only Ahead, No Passing Zone	W9-1,2,7; W14-3
		Intersections	2C.46	Cross Road, Side Roads, T, Y, Circular Intersection, Side Roads	W2-1,2,3,4,5,6,7,8; W16-12P,17P
			2C.47	Large Arrow (two directions)	W1-7
			2C.48	Oncoming Extended Green	W25-1,2
		Vehicular Traffic	2C.49	Truck Crossing, Truck (symbol), Emergency Vehicle, Tractor, Bicycle, Golf Cart, Horse-Drawn Vehicle, Trail Crossing	W8-6; W11-1,5,5a,8,10,11,12P, 14,15,15P,15a; W16-13P
	Non-Vehicular	2C.50,51	Pedestrian, Deer, Cattle, Snowmobile, Equestrian, Wheelchair, Large Animals, Playground	W11-2,3,4,6,7,9,16, 17,18,19,2,,21,22; W15-1;W16-13P	
	New	2C.52	New Traffic Pattern Ahead	W23-2	
	Other Supplemental Plaques	Location	2C.53	Downward Diagonal Arrow, Ahead	W16-7P,9P
HOV		2C.53	High-Occupancy Vehicle	W16-11P	
Distance		2C.55	XX Feet, XX Miles, Next XX Feet, Next XX Miles	W7-3aP;W16-2P,2aP, 3P,3aP,4P	
Arrow		2C.56	Advance Arrow, Directional Arrow,	W16-5P,6P	
Street Name Plaque		2C.58	Advance Street Name	W16-8P,8aP	
Intersection		2C.59	Cross Traffic Does Not Stop	W4-4P,4aP,4bP	
Share The Road		2C.60	Share the Road	W16-1P	
Photo Enforced		2C.61	Photo Enforced	W16-10P,10aP	
New	2C.62	New	W16-15P		

**Table 2C-1 Categories of Warning Signs and Plaques**

Sign or Plaque	Sign Designation	Section	Conventional Road		Expressway	Freeway	Minimum	Oversized
			Single Lane	Multi-Lane				
Horizontal Alignment	W1-1,2,3,4,5	2C.7	30 x 30	36 x 36	36 x 36	36 x 36	---	48 x 48
Combination Horizontal Alignment/Advisory Speed	W1-1a,2a	2C.10	36 x 36	36 x 36	48 x 48	48 x 48	---	48 x 48
One-Direction Large Arrow	W1-6	2C.12	48 x 24	48 x 24	60 x 30	60 x 30	---	60 x 30
Two-Direction Large Arrow	W1-7	2C.47	48 x 24	48 x 24	---	---	---	60 x 30
Chevron Alignment	W1-8	2C.9	18 x 24	18 x 24	30 X 36	36 x 48	---	24 x 30
Combination Horizontal Alignment/Intersection	W1-10,10a,10b,10c,10d,10e	2C.11	36 x 36	36 x 36	36 x 36	48 x 48	---	---
Hairpin Curve	W1-11	2C.7	30 x 30	30 x 30 *	36 x 36	48 X 48	---	48 x 48
Truck Rollover	W1-13	2C.13	36 x 36	36 x 36	36 x 36	48 X 48	---	36 x 36
270-degree Loop	W1-15	2C.7	30 x 30	30 x 30 *	36 x 36	48 X 48	---	48 x 48
Intersection Warning	W2-1,2,3,4,5,6,7,8,X1,X12	2C.46	30 x 30	30 x 30 *	36 x 36	---	24 x 24	48 x 48
Stop, Yield, or Signal Ahead	W3-1,2,3	2C.36	30 x 30	30 x 30 *	48 x 48	48 x 48	30 x 30	---
Be Prepared To Stop	W3-4	2C.36	36 x 36	36 x 36	48 x 48	48 x 48	30 x 30	---
Reduced Speed Limit Ahead	W3-5	2C.38	36 x 36	36 x 36	48 x 48	48 x 48	---	---
XX MPH Speed Zone Ahead	W3-5a	2C.38	36 x 36	36 x 36	48 x 48	48 x 48	---	---
Draw Bridge	W3-6	2C.39	36 x 36	36 x 36	48 x 48	---	---	60 x 60
Ramp Meter Ahead	W3-7	2C.37	36 x 36	36 x 36	---	---	---	---
Ramp Metered When Flashing	W3-8	2C.37	36 x 36	36 x 36	---	---	---	---
Prepare to Stop When Flashing	W3-X4	2C.36	66 x 42	66 x 42	66 x 42	---	66 x 42	66 x 42
Merging Traffic	W4-1	2C.40	36 x 36	36 x 36	48 x 48	48 x 48	30 x 30	---
Lane Ends	W4-2	2C.42	36 x 36	36 x 36	48 x 48	48 x 48	30 x 30	---
Added Lane	W4-3	2C.41	36 x 36	36 x 36	48 x 48	48 x 48	30 x 30	---
Cross Traffic Does Not Stop (plaque)	W4-4P	2C.59	24 x 12	24 x 12	36 x 18	---	---	48 x 24
Traffic from Left (Right) Does Not Stop (plaque)	W4-4aP	2C.59	24 x 12	24 x 12	36 x 18	---	---	48 x 24
Oncoming Traffic Does Not Stop (plaque)	W4-4bP	2C.59	24 x 12	24 x 12	36 x 18	---	---	48 x 24
Entering Roadway Merge	W4-5	2C.40	36 x 36	36 x 36	48 x 48	---	---	---
No Merge Area (plaque)	W4-5P	2C.40	18 x 24	18 x 24	24 x 30	---	---	---
Entering Roadway Added Lane	W4-6	2C.41	36 x 36	36 x 36	48 x 48	---	---	---
Road Narrows	W5-1	2C.19	36 x 36	36 x 36	48 x 48	48 x 48	30 x 30	---
Narrow Bridge	W5-2	2C.20	36 x 36	36 x 36	48 x 48	48 x 48	30 x 30	---
One Lane Bridge	W5-3	2C.21	36 x 36	36 x 36	48 x 48	48 x 48	30 x 30	---
Shoulder Narrows	W5-X1	2C.31	36 x 36	36 x 36	48 x 48	48 x 48	---	---
Divided Highway	W6-1	2C.22	36 x 36	36 x 36	48 x 48	48 x 48	---	---
Divided Highway Ends	W6-2	2C.23	36 x 36	36 x 36	48 x 48	48 x 48	---	---
Two-Way Traffic	W6-3	2C.44	36 x 36	36 x 36	48 x 48	48 x 48	---	---
Hill	W7-1	2C.16	30 x 30	36 x 36	36 x 36	36 x 36	24 x 24	48 x 48
Hill with Grade	W7-1a	2C.16	30 x 30	36 x 36	36 x 36	36 x 36	24 x 24	48 x 48
Use Low Gear (plaque)	W7-2P	2C.57	24 x 18	24 x 18	---	---	---	---
Trucks Use Lower Gear (plaque)	W7-2bP	2C.57	24 x 18	24 x 18	---	---	---	---
XX% Grade (plaque)	W7-3P	2C.57	24 x 18	24 x 18	---	---	---	---
Next XX Miles (plaque)	W7-3aP	2C.55	24 x 18	24 x 18	---	---	---	---
XX% Grade, XX Miles (plaque)	W7-3bP	2C..57	24 x 18	24 x 18	---	---	---	---

Table 2C-2 Warning Sign and Plaque Sizes (Sheet 1 of 3)

MN Rev. 1

MN Rev. 2

MN Rev. 2

MN Rev. 2

Sign or Plaque	Sign Designation	Section	Conventional Road		Expressway	Freeway	Minimum	Oversized
			Single Lane	Multi-Lane				
Runaway Truck Ramp XX Miles	W7-4	2C.17	78 x 48	78 x 48	78 x 48	78 x 48	---	---
Runaway Truck Ramp (w/arrow)	W7-4b	2C.17	78 x 60	78 x 60	78 x 60	78 x 60	---	---
Truck Escape Ramp	W7-4c	2C.17	78 x 60	78 x 60	78 x 60	78 x 60	---	---
Sand, Gravel, Paved (plaque)	W7-4dP,4eP,4fP	2C.17	24 x 12	24 x 12	24 x 12	24 x 12	---	---
Hill Blocks View	W7-6	2C.18	30 x 30	36 x 36	36 x 36	---	---	48 x 48
Bump or Dip	W8-1,1a,1b,2	2C.28	30 x 30	36 x 36	36 x 36	48 x 48	24 x 24	48 x 48
Pavement Ends	W8-3	2C.30	36 x 36	36 x 36	48 x 48	---	30 x 30	---
Soft Shoulder	W8-4	2C.31	36 x 36	36 x 36	48 x 48	48 x 48	24 x 24	48 x 48
Slippery When Wet	W8-5	2C.32	30 x 30	36 x 36	36 x 36	48 x 48	24 x 24	48 x 48
Road Condition (plaques)	W-5P,5bP,5cP	2C.32	24 x 18	24 x 18	30 x 24	36 x 30	---	36 x 30
Ice	W8-5aP	2C.32	24 x 12	24 x 12	30 x 18	30 x 18	---	---
Truck Crossing	W8-6	2C.49	36 x 36	36 x 36	36 x 36	48 x 48	24 x 24	48 x 48
Loose Gravel	W8-7	2C.32	36 x 36	36 x 36	36 x 36	---	24 x 24	48 x 48
Rough Road	W8-8	2C.32	36 x 36	36 x 36	36 x 36	48 x 48	24 x 24	48 x 48
Low Shoulder	W8-9	2C.31	36 x 36	36 x 36	36 x 36	48 x 48	24 x 24	48 x 48
Uneven Lanes	W8-11	2C.32	36 x 36	36 x 36	36 x 36	48 x 48	---	48 x 48
No Center Line	W8-12	2C.34	36 x 36	36 x 36	36 x 36	48 x 48	---	---
Bridge Ices Before Road	W8-13	2C.32	36 x 36	36 x 36	36 x 36	48 x 48	24 x 24	48 x 48
Fallen Rocks	W8-14	2C.32	30 x 30	36 x 36	36 x 36	48 x 48	24 x 24	48 x 48
Grooved Pavement	W8-15	2C.33	30 x 30	36 x 36	36 x 36	48 x 48	24 x 24	48 x 48
Motorcycle (plaque)	W8-15P	2C.33	24 x 18	24 x 18	30 x 24	36 x 30	---	36 x 30
Metal Bridge Deck	W8-16	2C.33	30 x 30	36 x 36	36 x 36	48 x 48	24 x 24	48 x 48
Shoulder Drop-Off (symbol)	W8-17	2C.31	30 x 30	36 x 36	36 x 36	48 x 48	24 x 24	48 x 48
Shoulder Drop-Off (plaque)	W8-17P	2C.31	24 x 18	24 x 18	30 x 24	36 x 30	---	36 x 30
Road May Flood	W8-18	2C.35	36 x 36	36 x 36	36 x 36	48 x 48	24 x 24	48 x 48
Flood Gauge	W8-19	2C.35	12 x 72	12 x 72	---	---	---	---
Gusty Winds Area	W8-21	2C.35	36 x 36	36 x 36	36 x 36	48 x 48	24 x 24	48 x 48
Fog Area	W8-22	2C.35	36 x 36	36 x 36	36 x 36	48 x 48	24 x 24	48 x 48
No Shoulder	W8-23	2C.31	36 x 36	36 x 36	36 x 36	48 x 48	24 x 24	48 x 48
Shoulder Ends	W8-25	2C.31	30 x 30	36 x 36	36 x 36	48 x 48	24 x 24	48 x 48
Left (Right) Lane Ends	W9-1	2C.42	36 x 36	36 x 36	36 x 36	48 x 48	30 x 30	48 x 48
Lane Ends Merge Left (Right)	W9-2	2C.42	36 x 36	36 x 36	36 x 36	48 x 48	30 x 30	48 x 48
Right (Left) Lane Exit Only Ahead	W9-7	2C.43	132 x 72	132 x 72	132 x 72	132 x 72	---	---
Bicycle	W11-1	2C.49	30 x 30	30 x 30 *	36 x 36	---	24 x 24	48 x 48
Pedestrian	W11-2	2C.50	30 x 30	36 x 36	36 x 36	---	24 x 24	48 x 48
Large Animals	W11-3,4,16,17,18,19,20,21,22	2C.50	30 x 30	36 x 36	36 x 36	---	24 x 24	48 x 48
Farm Vehicle	W11-5,5A	2C.49	30 x 30	36 x 36	36 x 36	---	24 x 24	48 x 48
Snowmobile	W11-6	2C.50	30 x 30	36 x 36	36 x 36	---	24 x 24	48 x 48
Equestrian	W11-7	2C.50	30 x 30	36 x 36	36 x 36	---	24 x 24	48 x 48
Emergency Vehicle	W11-8	2C.49	30 x 30	36 x 36	36 x 36	---	24 x 24	48 x 48
Disabled	W11-9	2C.50	30 x 30	36 x 36	36 x 36	---	---	48 x 48
Truck	W11-10	2C.49	30 x 30	36 x 36	36 x 36	---	24 x 24	48 x 48
Golf Cart	W11-11	2C.49	30 x 30	36 x 36	36 x 36	---	24 x 24	48 x 48
Emergency Signal Ahead (plaque)	W11-12P	2C.49	36 x 30	36 x 30	36 x 30	---	---	---
Horse-Drawn Vehicle	W11-14	2C.49	30 x 30	36 x 36	36 x 36	---	24 x 24	48 x 48
Bicycle/Pedestrian	W11-15	2C.49	30 x 30	36 x 36	36 x 36	---	24 x 24	48 x 48
Trail Crossing	W11-15a	2C.49	30 x 30	36 x 36	36 x 36	---	24 x 24	48 x 48

Table 2C-2 Warning Sign and Plaque Sizes (Sheet 2 of 3)

Sign or Plaque	Sign Designation	Section	Conventional Road		Expressway	Freeway	Minimum	Oversized
			Single Lane	Multi-Lane				
Trail Xing (plaque)	W11-15P	2C.49	24 x 18	24 x 18	30 x 24	---	---	36 x 30
Trucks Entering	W11-X3	2C.49	36 x 36	36 x 36	48 x 48	---	24 x 24	48 x 48
Double Arrow	W12-1	2C.25	30 x 30	36 x 36	36 x 36	---	---	---
Low Clearance (with arrow)	W12-2	2C.27	36 x 36	36 x 36	48 x 48	48 x 48	30 x 30	---
Low Clearance	W12-2a	2C.27	78 x 24	78 x 24	--	---	---	---
Low Clearance (with arrows)	W12-X2	2C.27	48 x 24	48 x 24	----	---	---	---
Advisory Speed (plaque)	W13-1P	2C.8	18 x 18	18 x 18	24 x 24	30 x 30	---	30 x 30
Advisory Exit or Ramp Speed	W13-2,3	2C.14	24 x 30	24 x 30	36 x 48	36 x 48	---	48 x 60
Combination Horizontal Alignment/Advisory Exit or Ramp Speed	W13-6,7	2C.15	24 x 42	24 x 42	36 x 60	36 x 60	---	48 x 84
Dead End, No Outlet	W14-1,2	2C.26	30 x 30	36 x 36	36 x 36	---	24 x 24	48 x 48
Dead End, No Outlet (w/arrow)	W14-1a, 2a	2C.26	36 x 8	36 x 8	---	---	---	---
No Passing Zone (pennant)	W14-3	2C.45	48 x 48 x 36	48 x 48 x 36	---	---	40 x 40 x 30	64 x 64 x 48
Playground	W15-1	2C.51	30 x 30	36 x 36	36 x 36	---	24 x 24	48 x 48
Share the Road (plaque)	W16-1P	2C.60	18 x 24	18 x 24	24 x 30	---	---	24 x 30
XX Feet	W16-2P	2C.55	24 x 18	24 x 18	---	---	---	30 x 24
XX Ft	W16-2aP	2C.55	24 x 12	24 x 12	---	---	---	30 x 18
XX Miles (2-line plaque)	W16-3P	2C.55	30 x 24	30 x 24	---	---	---	---
XX Miles (1-line plaque)	W16-3aP	2C.55	30 x 12	30 x 12	---	---	---	---
Next XX Feet (plaque)	W16-4P	2C.55	30 x 24	30 x 24	---	---	---	---
Supplemental Arrow (plaque)	W16-5P,6P	2C.56	24 x 18	24 x 18	---	---	---	---
Downward Diagonal Arrow (plaque)	W16-7P	2C.50	24 x 12	24 x 12	---	---	---	30 x 18
Advance Street Name (1-line plaque)	W16-8P	2C.58	Varies x 8	Varies x 8	---	---	---	---
Advance Street Name (2-line plaque)	W16-8aP	2C.58	Varies x 15	Varies x 15	---	---	---	---
Ahead (plaque)	W16-9P	2C.50	24 x 12	24 x 12	30 x 18	---	---	---
Photo Enforced (symbol plaque)	W16-10P	2C.61	24 x 12	24 x 12	36 x 18	---	---	48 x 24
Photo Enforced (plaque)	W16-10aP	2C.61	24 x 18	24 x 18	36 x 30	---	---	48 x 36
HOV (plaque)	W16-11P	2G.9	24 x 12	24 x 12	30 x 18	---	---	30 x 18
Traffic Circle (plaque)	W16-12P	2C.46	24 x 18	24 x 18	---	---	---	---
When Flashing (plaque)	W16-13P	2C.50	24 x 18	24 x 18	---	---	---	---
New (plaque)	W16-15P	2C.62	24 x 12	24 x 12	---	---	---	---
Roundabout (plaque)	W16-17P	2C.46	24 x 12	24 x 12	---	---	---	---
NOTICE (plaque)	W16-18P	2A.15	24 x 12	24 x 12	---	---	---	---
Speed Hump	W17-1	2C.29	30 x 30	36 x 36	---	---	24 x 24	48 x 48
Freeway Ends XX Miles	W19-1	2C.24	---	---	---	144 x 48	---	---
Expressway Ends XX Miles	W19-2	2C.24	---	---	144 x 48	---	---	---
Freeway Ends	W19-3	2C.24	---	---	---	48 x 48	---	---
Expressway Ends	W19-4	2C.24	---	---	48 x 48	---	---	---
All Traffic Must Exit	W19-5	2C.24	---	---	90 x 48	90 x 48	---	---
New Traffic Pattern Ahead	W23-2	2C.52	36 x 36	36 x 36	---	---	---	---
Traffic Signal Extended Green	W25-1,2	2C.48	24 x 30	24 x 30	---	---	---	---

\* The minimum size required for diamond-shaped warning signs facing traffic on multi-lane conventional roads shall be 36 x 36 where the posted speed limit is greater than 35 mph (see Section 2C.4).

Notes:

1. Larger signs may be used when appropriate
2. Dimensions in inches are shown as width x height

**Table 2C-2 Warning Sign and Plaque Sizes (Sheet 3 of 3)**

## 2C.4 Size of Warning Signs

### STANDARD:

Except as provided in Section 2A.11, the sizes for warning signs shall be as shown in Table 2C-2 and in Appendix C at the back of this Manual.

### SUPPORT:

Section 2A.11 contains information regarding the applicability of the various columns in Table 2C-2.

### STANDARD:

Except as provided in the Option below, the minimum size for all diamond-shaped warning signs facing traffic on a multi-lane conventional road where the posted speed limit is higher than 35 mph shall be 36 x 36 inches.

The minimum size for supplemental warning plaques that are not included in Table 2C-2 shall be as shown in Table 2C-3.

### OPTION:

If a diamond-shaped warning sign is placed on the left-hand side of a multi-lane roadway to supplement the installation of the same warning sign on the right-hand side of the roadway, the minimum size identified in the Single Lane column in Table 2C-2 may be used.

Signs and plaques larger than those shown in Appendix C and Tables 2C-2 and 2C-3 may be used (see Section 2A.11).

### GUIDANCE:

The minimum size for all diamond-shaped warning signs facing traffic on exit and entrance ramps should be the size identified in Table 2C-2 for the mainline roadway classification (Expressway or Freeway). If a minimum size is not provided in the Freeway Column, the Expressway size should be used. If a minimum size is not provided in the Freeway or the Expressway Column, the Oversized size should be used.

## 2C.5 Placement of Warning Signs

### SUPPORT:

For information on placement of warning signs, see Sections 2A.16 to 2A.21.

The time needed for detection, recognition, decision, and reaction is called the Perception-Response Time (PRT). Table 2C-4 is provided as an aid for determining warning sign location. The distances shown in Table 2C-4 can be adjusted for roadway features, other signing, and to improve visibility.

### GUIDANCE:

Warning signs should be placed so that they provide adequate PRT. The distances contained in Table 2C-4 are for guidance purposes and should be applied with engineering judgment. Warning signs should not be placed too far in advance of the condition, such that drivers might tend to forget the warning because of other driving distractions, especially in urban areas.

Minimum spacing between warning signs with different messages should be based on the estimated PRT for driver comprehension of and reaction to the second sign.

The effectiveness of the placement of warning signs should be periodically evaluated under both day and night conditions.

### OPTION:

Warning signs that advise road users about conditions that are not related to a specific location, such as Deer Crossing or SOFT SHOULDER, may be installed in an appropriate location, based on engineering judgment, since they are not covered in Table 2C-4.

Size of Warning Sign	Size of Supplemental Plaque			
	Rectangular			Square
	1 Line	2 Lines	Arrow	
24 x 24 30 x 30	24 x 12	24 x 18	24 x 12	18 x 18
36 x 36 48 x 48	30 x 18	30 x 24	30 x 18	24 x 24

- Notes: 1. Larger supplemental plaques may be used when appropriate.  
2. Dimensions are in inches and are shown as width x height.

**Table 2C-3. Minimum Size of Supplemental Warning Plaques**

Posted or 85th Percentile Speed  ( mph )	Advance Placement Distance <sup>1</sup>								
	Condition A: Speed reduction and lane changing in heavy traffic <sup>2</sup>  feet	Condition B: Deceleration to the listed advisory speed (mph) for the condition							
		0 <sup>3</sup> feet	10 <sup>4</sup> feet	20 <sup>4</sup> feet	30 <sup>4</sup> feet	40 <sup>4</sup> feet	50 <sup>4</sup> feet	60 <sup>4</sup> feet	70 <sup>4</sup> feet
20	225	100 <sup>6</sup>	see Note <sup>5</sup>	---	---	---	---	---	---
25	325	100 <sup>6</sup>	see Note <sup>5</sup>	see Note <sup>5</sup>	---	---	---	---	---
30	460	100 <sup>6</sup>	see Note <sup>5</sup>	see Note <sup>5</sup>	---	---	---	---	---
35	565	100 <sup>6</sup>	see Note <sup>5</sup>	see Note <sup>5</sup>	see Note <sup>5</sup>	---	---	---	---
40	670	125	100 <sup>6</sup>	100 <sup>6</sup>	see Note <sup>5</sup>	---	---	---	---
45	775	175	125	100 <sup>6</sup>	100 <sup>6</sup>	see Note <sup>5</sup>	---	---	---
50	885	250	200	175	125	100 <sup>6</sup>	---	---	---
55	990	325	275	225	200	125	see Note <sup>5</sup>	---	---
60	1100	400	350	325	275	200	100 <sup>6</sup>	---	---
65	1200	475	450	400	350	275	200	100 <sup>6</sup>	---
70	1250	550	525	500	450	375	275	150	---
75	1350	650	625	600	550	475	375	250	100 <sup>6</sup>

NOTES:

- <sup>1</sup> The distances are adjusted for a sign legibility distance of 180 feet for Condition A. The distances for Condition B have been adjusted for a sign legibility distance of 250 feet, which is the appropriate for an alignment warning symbol sign. For Condition A and B, warning signs with less than 6-inch legend or more than 4 words, a minimum of 100 feet should be added to the advance placement distance to provide adequate legibility of the warning sign.
- <sup>2</sup> Typical conditions are locations where the road user might use extra time to adjust speed and change lanes in heavy traffic because of a complex driving situation. Typical signs are Merge and Right Lane Ends. The distances are determined by providing the driver a PRT of 14.0 to 14.5 seconds for vehicle maneuvers (2004 AASHTO Policy, Exhibit 3-3, Decision Sight Distance, Avoidance Maneuver E) minus the legibility distance of 180 feet for the appropriate sign.
- <sup>3</sup> Typical condition is the warning of a potential stop situation. Typical signs are Stop Ahead, Yield Ahead, Signal Ahead, and Intersection Warning signs. The distances are based on the 2004 AASHTO Policy, Exhibit 3-1, Stopping Sight Distance, providing a PRT of 2.5 seconds, a deceleration rate of 11.2 feet/second<sup>2</sup>, minus the sign legibility distance of 180 feet.
- <sup>4</sup> Typical conditions are locations where the road user must decrease speed to maneuver through the warned condition. Typical signs are Turn, Curve, Reverse Turn, or Reverse Curve. The distance is determined by providing a 2.5 second PRT, a vehicle deceleration rate of 10 feet/second<sup>2</sup>, minus the sign legibility distance of 250 ft.
- <sup>5</sup> No suggested distances are provided for these speeds, as placement location is dependent on site conditions and other signing. An alignment warning sign may be placed anywhere from the point of curvature up to 100 feet in advance of the curve. However, the alignment warning sign should be installed in advance of the curve and at least 100 feet from any other sign.
- <sup>6</sup> The minimum advance placement distance is listed as 100 feet to provide adequate spacing between signs.

**Table 2C-4. Guidelines for Advance Placement of Warning Signs**

## 2C.6 Horizontal Alignment Warning Signs

### SUPPORT:

A variety of horizontal alignment warning signs, pavement markings (see Chapter 3B), and delineation (see Chapter 3F) can be used to advise motorists of a change in the roadway alignment. Uniform application of these traffic control devices with respect to the amount of change in the roadway alignment conveys a consistent message establishing driver expectancy and promoting effective roadway operations. The design and application of horizontal alignment warning signs to meet those requirements are addressed in Sections 2C.6 through 2C.15.



### STANDARD:

In advance of horizontal curves on freeways, on expressways, and on roadways with more than 1,000 AADT that are functionally classified as arterials or collectors, horizontal alignment warning signs shall be used in accordance with Table 2C-5 based on the speed differential between the roadway's posted or statutory speed limit or 85th-percentile speed, whichever is higher, or the prevailing speed on the approach to the curve, and the horizontal curve's advisory speed.

### OPTION:

Horizontal Alignment Warning signs may also be used on other roadways or on arterial and collector roadways with less than 1,000 AADT based on engineering judgment.

## 2C.7 Horizontal Alignment Signs (W1-1 through W1-5, W1-11, W1-15)

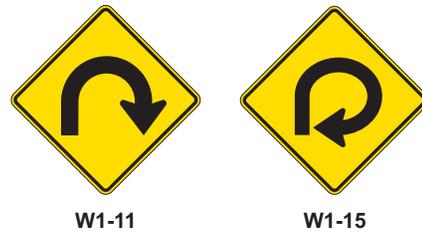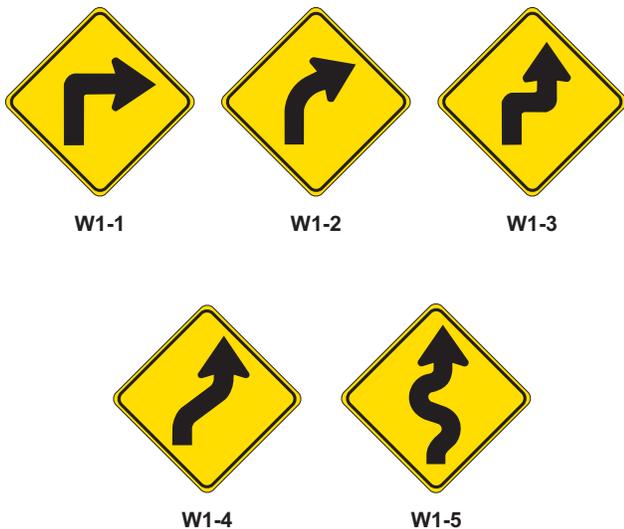

### STANDARD:

If Table 2C-5 indicates that a horizontal alignment sign is required, recommended, or allowed, the sign installed in advance of the curve shall be a Curve (W1-2) sign unless a different sign is recommended or allowed by the provisions of this Section.

A Turn (W1-1) sign shall be used instead of a Curve sign in advance of curves that have advisory speeds of 30 mph or less (see Figure 2C-2).

### GUIDANCE:

Where there are two changes in roadway alignment in opposite directions that are separated by a tangent distance of less than 600 feet, the Reverse Turn (W1-3) sign should be used instead of multiple Turn (W1-1) signs and the Reverse Curve (W1-4) sign should be used instead of multiple Curve (W1-2) signs.

### OPTION:

A Winding Road (W1-5) sign may be used instead of multiple Turn (W1-1) or Curve (W1-2) signs where there are three or more changes in roadway alignment each separated by a tangent distance of less than 600 feet.

A NEXT XX MILES (W7-3aP) supplemental distance plaque (see Section 2C.55) may be installed below the Winding Road sign where continuous roadway curves exist for a specific distance.

If the curve has a change in horizontal alignment of 135 degrees or more, the Hairpin Curve (W1-11) sign may be used instead of a Curve or Turn sign.

If the curve has a change of direction of approximately 270 degrees, such as on a cloverleaf interchange ramp, the 270-degree Loop (W1-15) sign may be used instead of a Curve or Turn sign.

### GUIDANCE:

When the Hairpin Curve sign or the 270-degree Loop sign is installed, either a One-Direction Large Arrow (W1-6) sign or Chevron Alignment (W1-8) signs should be installed on the outside of the turn or curve.

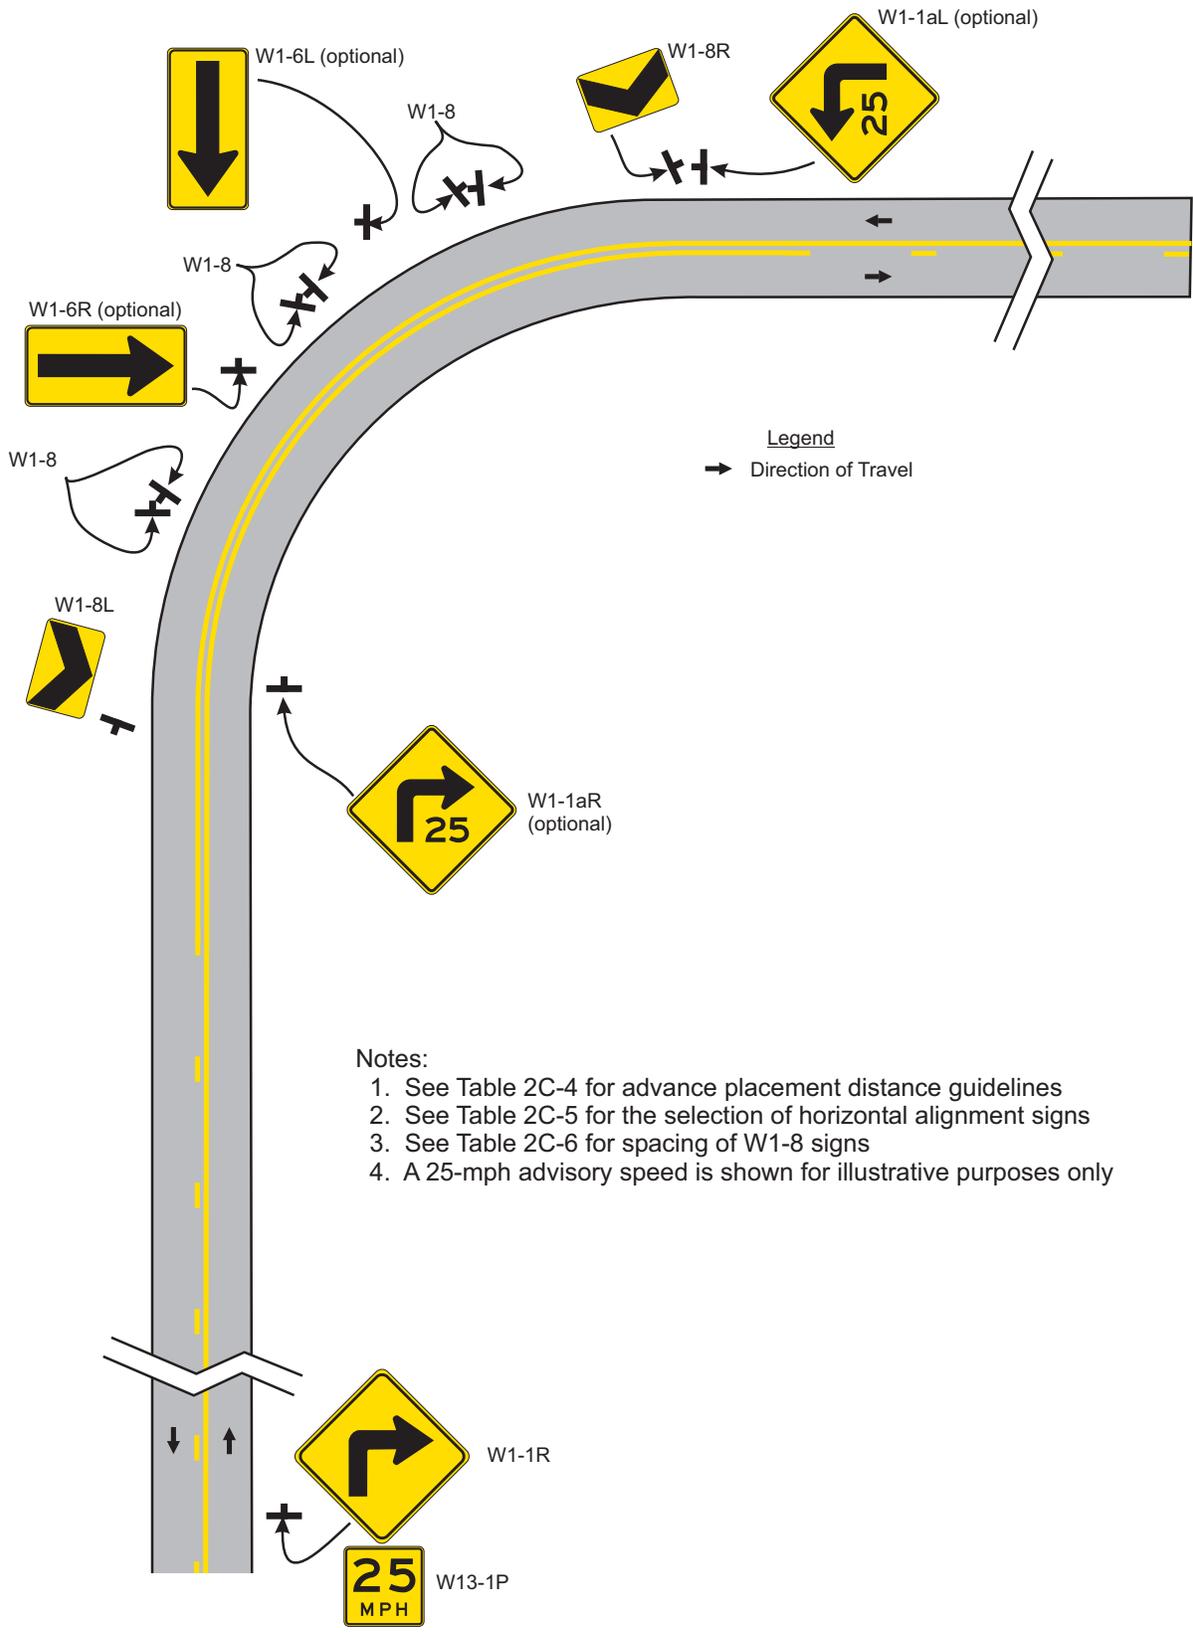


Figure 2C-2. Example of Warning Signs for a Turn

Type of Horizontal Alignment Sign	Difference Between Speed Limit and Advisory Speed				
	5 mph	10 mph	15 mph	20 mph	25 mph or more
Turn (W1-1), Curve (W1-2), Reverse Turn (W1-3), Reverse Curve (W1-4), Winding Road (W1-5), and Combination Horizontal Alignment/Intersection (W1-10 Series) (see Section 2C.7 to determine which sign to use)	Recommended	Required	Required	Required	Required
Advisory Speed Plaque (W13-1P)	Recommended	Required	Required	Required	Required
Chevrons (W1-8) and/or One Direction Large Arrow (W1-6)	Optional	Recommended	Required	Required	Required
Exit Speed (W13-2) and Ramp Speed (W13-3) on exit ramp	Optional	Optional	Recommended	Required	Required

Note: Required means that the sign and/or plaque shall be used, recommended means that the sign and/or plaque should be used, and optional means that the sign and/or plaque may be used.

See Section 2C.6 for roadways with less than 1,000 ADT.

**Table 2C-5. Horizontal Alignment Sign Selection**

### 2C.8 Advisory Speed Plaque (W13-1P)



W13-1P

**OPTION:**

The Advisory Speed (W13-1P) plaque may be used to supplement any warning sign to indicate the advisory speed for a condition.

**STANDARD:**

The use of the Advisory Speed plaque for horizontal curves shall be in accordance with the information shown in Table 2C-5. The Advisory Speed plaque shall also be used where an engineering study indicates a need to advise road users of the advisory speed for other roadway conditions.

If used, the Advisory Speed plaque shall carry the message XX MPH. The speed displayed shall be a multiple of 5 mph.

Except in emergencies or when the condition is temporary, an Advisory Speed plaque shall not be installed until the advisory speed has been determined by an

engineering study.

The Advisory Speed plaque shall only be used to supplement a warning sign and shall not be installed as a separate sign installation.

The advisory speed shall be determined by an engineering study that follows established engineering practices.

**SUPPORT:**

Among the established engineering practices that are appropriate for the determination of the recommended advisory speed for a horizontal curve are the following:

- A. An accelerometer that provides a direct determination of side friction factors
- B. A design speed equation
- C. A traditional ball-bank indicator using the following criteria:
  1. 16 degrees of ball-bank for speeds of 20 mph or less
  2. 14 degrees of ball-bank for speeds of 25 to 30 mph
  3. 12 degrees of ball-bank for speeds of 35 mph and higher

The 16, 14, and 12 degrees of ball-bank criteria are comparable to the current AASHTO horizontal curve design guidance. Research has shown that drivers often exceed existing posted advisory curve speeds by 7 to 10 mph.

**GUIDANCE:**

The advisory speed should be determined based on free-flowing traffic conditions.

Because changes in conditions, such as roadway geometrics, surface characteristics, or sight distance, might affect the advisory speed, each location should be evaluated periodically or when conditions change.

**2C.9 Chevron Alignment Sign (W1-8)**



W1-8

**STANDARD:**

The use of the Chevron Alignment (W1-8) sign (see Figure 2C-2) to provide additional emphasis and guidance for a change in horizontal alignment shall be in accordance with the information shown in Table 2C-5.

**OPTION:**

When used, Chevron Alignment signs may be used instead of or in addition to standard delineators.

**STANDARD:**

The Chevron Alignment sign shall be a vertical rectangle. No border shall be used on the Chevron Alignment sign.

If used, Chevron Alignment signs shall be installed on the outside of a turn or curve, in line with and at approximately a right angle to approaching traffic. Chevron Alignment signs shall be installed at a minimum height of 4 feet, measured vertically from the bottom of the sign to the elevation of the near edge of the traveled way.

**GUIDANCE:**

The approximate spacing of Chevron Alignment signs on the turn or curve measured from the point of curvature (PC) should be as shown in Table 2C-6.

If used, Chevron Alignment signs should be visible for a sufficient distance to provide the road user with adequate time to react to the change in alignment.

**STANDARD:**

Chevron Alignment signs shall not be placed on the far side of a T-intersection facing traffic on the stem approach to warn drivers that a through movement is not physically possible, as this is the function of a Two-Direction (or One-Direction) Large Arrow sign.


Advisory Speed	Curve Radius	Sign Spacing
15 mph or less	Less than 200 feet	40 feet
20 to 30 mph	200 to 400 feet	80 feet
35 to 45 mph	401 to 700 feet	120 feet
50 to 60 mph	701 to 1250 feet	160 feet
More than 60 mph	More than 1250 feet	200 feet

Note: The relationship between the curve radius and the advisory speed shown in this table should not be used to determine the advisory speed.

**Table 2C-6. Typical Spacing of Chevron Alignment Signs on Horizontal Curves**

Chevron Alignment signs shall not be used to mark obstructions within or adjacent to the roadway, including the beginning of guardrails or barriers, as this is the function of an object marker (see Section 2C.63).

**2C.10 Combination Horizontal Alignment/Advisory Speed Signs (W1-1a, W1-2a)**

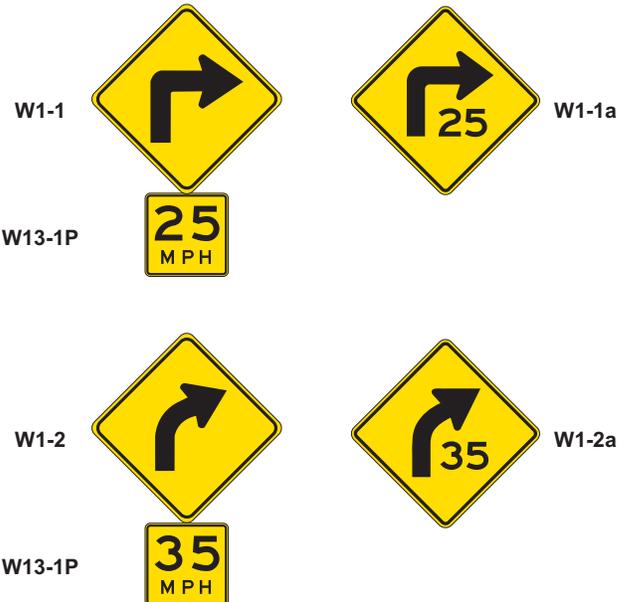

**OPTION:**

The Turn (W1-1) sign or the Curve (W1-2) sign may be combined with the Advisory Speed (W13-1P) plaque (see Section 2C.8) to create a combination Turn/Advisory Speed (W1-1a) sign or combination Curve/Advisory Speed (W1-2a) sign.

MN Rev. 1

The combination Horizontal Alignment/Advisory Speed sign (W1-1a and W1-2a) may be used to supplement the advance Horizontal Alignment warning sign and Advisory Speed plaque based upon an engineering study.

**STANDARD:**

If used, the combination Horizontal Alignment/Advisory Speed sign shall not be used alone and shall not be used as a substitute for a Horizontal Alignment warning sign and Advisory Speed plaque at the advance warning location. The combination Horizontal Alignment/Advisory Speed sign shall only be used as a supplement to the advance Horizontal Alignment warning sign. If used, the combination Horizontal Alignment/Advisory Speed sign shall be installed at the beginning of the turn or curve.

**GUIDANCE:**

The advisory speed displayed on the combination Horizontal Alignment/Advisory Speed sign should be based on the advisory speed for the horizontal curve using recommended engineering practices (see Section 2C.8).

**2C.11 Combination Horizontal Alignment/Intersection Signs (W1-10 Series)**



W1-10



W1-10a



W1-10b



W1-10c



W1-10d



W1-10e

**OPTION:**

The symbols from the Turn (W1-1) sign or the Curve (W1-2) sign may be combined with the symbols from the Cross Road (W2-1) sign or the Side Road (W2-2 or W2-3) sign to create a combination Horizontal Alignment/Intersection (W1-10 series) sign that depicts the condition where an intersection within or immediately adjacent to a turn or curve.

**GUIDANCE:**

Elements of the combination Horizontal Alignment/Intersection sign related to horizontal alignment should comply with the provisions of Section 2C.7, and elements related to intersection configuration should comply with the provisions of Section 2C.46. The symbol design should approximate the configuration of the intersecting roadway(s). No more than one Cross Road or two Side Road symbols should be displayed on any one combination Horizontal Alignment/Intersection sign.

**STANDARD:**

The use of the combination Horizontal Alignment/Intersection sign shall be in accordance with the appropriate Turn or Curve sign information shown in Table 2C-5.

**2C.12 One-Direction Large Arrow Sign (W1-6)**



W1-6

**OPTION:**

A One-Direction Large Arrow (W1-6) sign may be used either as a supplement or alternative to Chevron Alignment signs in order to delineate a change in horizontal alignment (see Figure 2C-2).

A One-Direction Large Arrow (W1-6) sign may be used to supplement a Turn or Reverse Turn sign (see Figure 2C-2) to emphasize the abrupt curvature.

**STANDARD:**

The One-Direction Large Arrow sign shall be a horizontal rectangle with an arrow pointing to the left or right.

The use of the One-Direction Large Arrow sign shall be in accordance with the information shown in Table 2C-5.

If used, the One-Direction Large Arrow sign shall be installed on the outside of a turn or curve in line with and at approximately a right angle to approaching traffic.

The One-Direction Large Arrow sign shall not be used where there is no alignment change in the direction of travel, such as at the beginnings and ends of medians or at center piers.

The One-Direction Large Arrow sign directing traffic to the right shall not be used in the central island of a roundabout.

**GUIDANCE:**

If used, the One-Direction Large Arrow sign should be visible for a sufficient distance to provide the road user with adequate time to react to the change in alignment.

**2C.13 Truck Rollover Warning Sign (W1-13)**



W1-13

**OPTION:**

A Truck Rollover Warning (W1-13) sign may be used to warn drivers of vehicles with a high center of gravity, such as trucks, tankers, and recreational vehicles, of a curve or turn where geometric conditions might contribute to a loss of control and a rollover as determined by an engineering study.

**SUPPORT:**

Among the established engineering practices that are appropriate for the determination of the truck rollover potential of a horizontal curve are the following:

- A. An accelerometer that provides a direct determination of side friction factors
- B. A design speed equation
- C. A traditional ball-bank indicator using 10 degrees of ball-bank

**STANDARD:**

If a Truck Rollover Warning (W1-13) sign is used, it shall be accompanied by an Advisory Speed (W13-1P) plaque indicating the recommended speed for vehicles with a higher center of gravity.

**OPTION:**

The Truck Rollover Warning sign may be displayed as a static sign, as a static sign supplemented by a flashing warning beacon, or as a changeable message sign activated by the detection of an approaching vehicle with a high center of gravity that is traveling in excess of the recommended speed for the condition.

**SUPPORT:**

The curved arrow on the Truck Rollover Warning sign shows the direction of roadway curvature. The truck tips in the opposite direction.

**2C.14 Advisory Exit and Ramp Speed Signs (W13-2, W13-3)**



W13-2



W13-3

**STANDARD:**

Advisory Exit Speed (W13-2) and Advisory Ramp Speed (W13-3) signs shall be vertical rectangles. The use of Advisory Exit Speed and Advisory Ramp Speed signs on freeway and expressway ramps shall be in accordance with the information shown in Table 2C-5.

**GUIDANCE:**

If used, the Advisory Exit Speed sign should be installed along the deceleration lane and the advisory speed displayed should be based on an engineering study. When a Truck Rollover (W1-13) sign (see Section 2C.13) is also installed for the ramp, the advisory exit speed should be based on the truck advisory speed for the horizontal alignment using recommended engineering practices.

If used, the Advisory Exit Speed sign should be visible in time for the road user to decelerate and make an exiting maneuver.

**SUPPORT:**

Table 2C-4 lists recommended advance sign placement distances for deceleration to various advisory speeds.

**GUIDANCE:**

If used, the Advisory Ramp Speed sign should be installed on the ramp to confirm the ramp advisory speed.

If used, Chevron Alignment (W1-8) signs and/or One-Direction Large Arrow (W1-6) signs should be installed on the outside of the exit curve as described in Sections 2C.9 and 2C.12.

**OPTION:**

Where there is a need to remind road users of the recommended advisory speed, a horizontal alignment warning sign with an advisory speed plaque may be installed at or beyond the beginning of the exit curve or on the outside of the curve, provided that it is apparent that the sign applies only to exiting traffic. These signs may also be used at intermediate points along the ramp, especially if the ramp curvature changes and the subsequent curves on the ramp have a different advisory speed than the initial ramp curve.

MN Rev. 1

**SUPPORT:**

Figure 2C-3 shows an example of advisory speed signing for an exit ramp. Engineering judgment should be used for actual sign selection and placement at specific locations.

**2C.15 Combination Horizontal Alignment/Advisory Exit and Ramp Speed Signs (W13-6, W13-7)**



W13-6



W13-7

**OPTION:**

A horizontal alignment sign (see Section 2C.7) may be combined with an Advisory Exit Speed or Advisory Ramp Speed sign to create a combination Horizontal Alignment/Advisory Exit Speed (W13-6) sign or a combination Horizontal Alignment/Advisory Ramp Speed (W13-7) sign. These combination signs may be used where the severity of the exit ramp curvature might not be apparent to road users in the deceleration lane or where the curvature needs to be specifically identified as being on the exit ramp rather than on the mainline.

**2C.16 Hill Signs (W7-1, W7-1a)**



W7-1



W7-1a

**GUIDANCE:**

The Hill (W7-1) sign should be used in advance of a downgrade where the length, percent of grade, horizontal curvature, and/or other physical features require special precautions on the part of road users.

The Hill sign and supplemental grade (W7-3P) plaque (see Section 2C.57) used in combination, or the W7-1a sign used alone, should be installed in advance of downgrades for the following conditions:

- A. 5% grade that is more than 3,000 feet in length;
- B. 6% grade that is more than 2,000 feet in length;
- C. 7% grade that is more than 1,000 feet in length;
- D. 8% grade that is more than 750 feet in length; or
- E. 9% grade that is more than 500 feet in length.

These signs should also be installed for steeper grades or where crash experience and field observations indicate a need.

Supplemental plaques (see Section 2C.57) and larger signs should be used for emphasis or where special hill characteristics exist. On longer grades, the use of the Hill sign with a distance (W7-3aP) plaque or the combination distance/grade (W7-3bP) plaque at periodic intervals of approximately 1-mile spacing should be considered.

**STANDARD:**

If the percent grade is displayed on a supplemental plaque, the plaque shall be placed below the Hill (W7-1) sign.

**OPTION:**

A USE LOW GEAR (W7-2P) or TRUCKS USE LOWER GEAR (W7-2bP) supplemental plaque may be used to indicate a situation where downshifting as well as braking might be advisable.

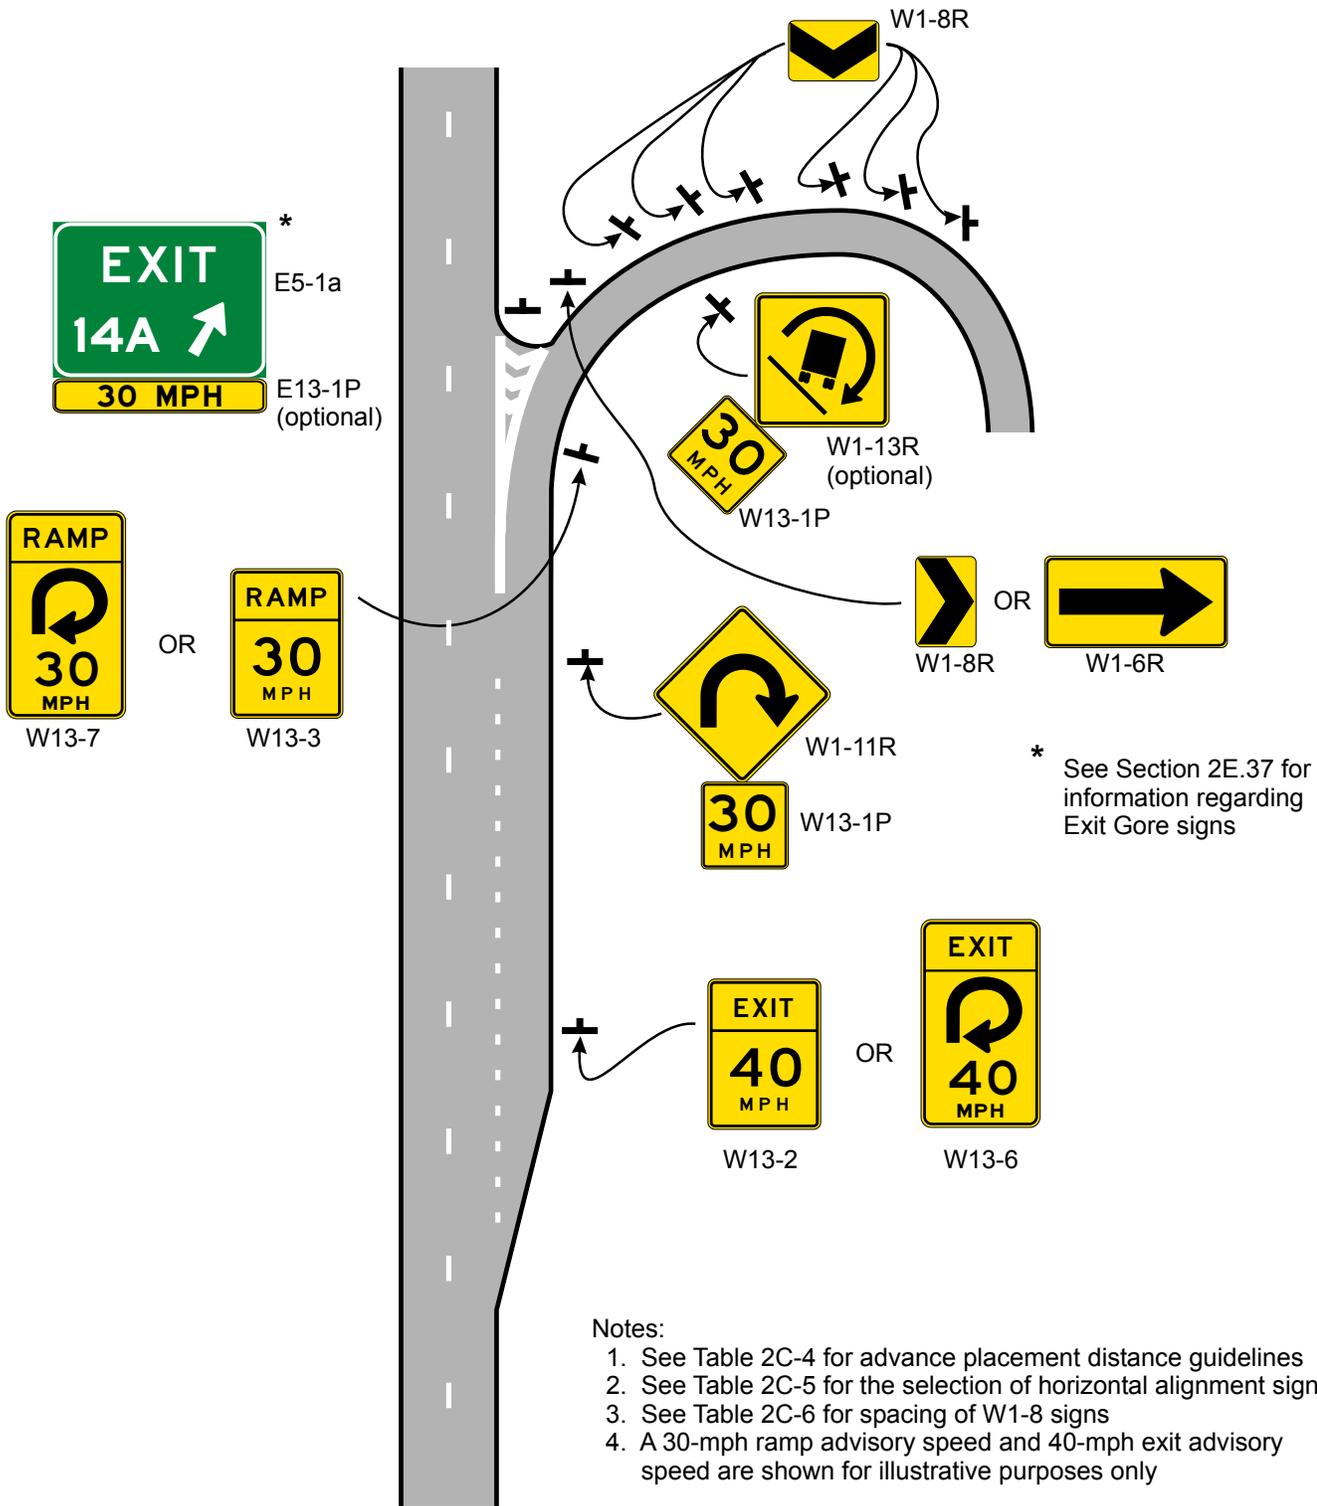


Figure 2C-3. Example of Advisory Speed Signing for an Exit Ramp

**2C.17 Truck Escape Ramp Signs (W7-4 Series)**



W7-4



W7-4b



W7-4c



W7-4dP



W7-4eP



W7-4fP

**GUIDANCE:**

Where applicable, truck escape (or runaway truck) ramp advance warning signs should be located approximately 1 mile, and 1/2 mile in advance of the grade, and of the ramp. A sign also should be placed at the gore. A RUNAWAY VEHICLES ONLY (R4-10) sign (see Section 2B.35) should be installed near the ramp entrance to discourage other road users from entering the ramp. No Parking (R8-3) signs should be placed near the ramp entrance.

**STANDARD:**

When truck escape ramps are installed, one of the W7-4 series signs shall be used.

**OPTION:**

A SAND (W4-7d), GRAVEL (W7-4e), or PAVED (W7-4f) supplemental plaque may be used to describe the ramp surface. State and local highway agencies may develop appropriate word message signs for the specific situation.

**2C.18 HILL BLOCKS VIEW Sign (W7-6)**



W7-6

**OPTION:**

A HILL BLOCKS VIEW (W7-6) sign may be used in advance of a crest vertical curve to advise road users to reduce speed as they approach and traverse the hill as only limited stopping sight distance is available.

**GUIDANCE:**

When a HILL BLOCKS VIEW sign is used, it should be supplemented by an Advisory Speed (W13-1P) plaque indicating the recommended speed for traveling over the hillcrest based on available stopping sight distance.

**2C.19 ROAD NARROWS Sign (W5-1)**



W5-1

**GUIDANCE:**

Except as provided in the following Option, a ROAD NARROWS (W5-1) sign should be used in advance of a transition on two-lane roads where the pavement width is reduced abruptly to a width such that vehicles traveling in opposite directions cannot simultaneously travel through the narrow portion of the roadway without reducing speed.

**OPTION:**

The ROAD NARROWS (W5-1) sign may be omitted on low-volume local streets that have speed limits of 30 mph or less.

Additional emphasis may be provided by the use of object markers and delineators (see Sections 2C.63 through 2C.65 and Chapter 3F). The Advisory Speed (W13-1P) plaque (see Section 2C.8) may be used to indicate the recommended speed.

## 2C.20 NARROW BRIDGE Sign (W5-2)



W5-2

### **GUIDANCE:**

A NARROW BRIDGE (W5-2) sign should be used in advance of any bridge or culvert having a two-way roadway clearance width of greater than 18 feet and less than the approach roadway width, or any bridge or culvert having a roadway clearance less than the width of the approach travel lanes.

Additional emphasis should be provided by the use of object markers, delineators, and/or pavement markings.

### **OPTION:**

A NARROW BRIDGE sign may be used in advance of a bridge or culvert on which the approach shoulders are narrowed or eliminated.

## 2C.21 ONE LANE BRIDGE Sign (W5-3)



W5-3

### **GUIDANCE:**

A ONE LANE BRIDGE (W5-3) sign should be used on two-way roadways in advance of any bridge or culvert:

- A. Having a clear roadway width of less than 16 feet, or
- B. Having a clear roadway width of less than 18 feet when commercial vehicles constitute a high proportion of the traffic, or
- C. Having a clear roadway width of 18 feet or less, where the sight distance is limited on the approach to a structure.

Additional emphasis should be provided by the use of object markers, delineators, and/or pavement markings.

## 2C.22 Divided Highway Sign (W6-1)



W6-1

### **GUIDANCE:**

A Divided Highway (W6-1) sign should be used on the approaches to a section of highway (not an intersection or junction) where the opposing flows of traffic are separated by a median or other physical barrier.

### **STANDARD:**

The Divided Highway (W6-1) sign shall not be used instead of a Keep Right (R4-7 series) sign on the approach end of a median island.

## 2C.23 Divided Highway Ends Sign (W6-2)



W6-2

### **GUIDANCE:**

A Divided Highway Ends (W6-2) sign should be used in advance of the end of a section of physically divided highway (not an intersection or junction) as a warning of two-way traffic ahead.

The Two-Way Traffic (W6-3) sign (see Section 2C.44) should be used to give warning and notice of the transition to a two-lane, two-way section.

**2C.24 Freeway or Expressway Ends Signs (W19 Series)**



W19-1



W19-2



W19-3



W19-4



W19-5

**OPTION:**

A FREEWAY ENDS XX MILES (W19-1) sign or a FREEWAY ENDS (W19-3) sign may be used in advance of the end of a freeway.

An EXPRESSWAY ENDS XX MILES (W19-2) sign or an EXPRESSWAY ENDS (W19-4) sign may be used in advance of the end of an expressway.

The rectangular W19-1 and W19-2 signs may be post-mounted or may be mounted overhead for increased emphasis.

**GUIDANCE:**

If the reason that the freeway is ending is that the next portion of the freeway is not yet constructed and as a result all traffic must use an exit ramp to leave the freeway, an ALL TRAFFIC MUST EXIT (W19-5) sign should be used in addition to the Freeway Ends signs in advance of the downstream end of the freeway.

**2C.25 Double Arrow Sign (W12-1)**



W12-1

**OPTION:**

The Double Arrow (W12-1) sign may be used to advise road users that traffic is permitted to pass on either side of an island, obstruction, or gore in the roadway. Traffic separated by this sign may either rejoin or change directions.

**GUIDANCE:**

If used on a raised island, the Double Arrow sign should be mounted near the approach end.

If used in front of a pier or obstruction, the Double Arrow sign should be mounted on the face of, or just in front of, the obstruction. Where stripe markings are used on the obstruction, they should be discontinued to leave a 75 mm (3 in) space around the outside of the sign.

**2C.26 DEAD END/NO OUTLET Signs (W14-1, W14-1a, W14-2, W14-2a)**



W14-1



W14-2



W14-1a



W14-2a

**OPTION:**

The DEAD END (W14-1) sign may be used at the entrance of a single road or street that terminates in a dead end or cul-de-sac. The NO OUTLET (W14-2) sign may be used at the entrance to a road or road network from which there is no other exit.

DEAD END (W14-1a) or NO OUTLET (W14-2a) signs may be used in combination with Street Name (D3-1) signs (see Section 2D.38) to warn turning traffic that the cross street ends in the direction indicated by the arrow.

At locations where the cross street does not have a name, the W14-1a or W14-2a signs may be used alone in place of a street name sign.

**STANDARD:**

The DEAD END (W14-1a) and NO OUTLET (W14-2a) signs shall be horizontal rectangles with an arrow pointing to the left or right.

When the W14-1 or W14-2 sign is used, the sign shall be posted as near as practical to the entry point or at a sufficient advance distance to permit the road user to avoid the dead end or no outlet condition by turning at the nearest intersecting street.

The DEAD END (W14-1a) or NO OUTLET (W14-2a) signs shall not be used instead of the W14-1 or W14-2 signs where traffic can proceed straight through the intersection into the dead end street or no outlet area.

**2C.27 Low Clearance Signs (W12-2, W12-2a, W12-X2)**



W12-2



W12-2a

**STANDARD:**

The Low Clearance (W12-2) sign shall be used to warn road users of clearances less than 12 inches above the statutory maximum vehicle height.

**GUIDANCE:**

The actual clearance should be displayed on the Low Clearance sign to the nearest 1 inch not exceeding the actual clearance. However, in areas that experience changes in temperature causing frost action, a reduction, not exceeding 3 inches, should be used for this condition.

Where the clearance is less than the legal maximum vehicle height, the W12-2 sign with a supplemental distance plaque should be placed at the nearest intersecting road or wide point in the road at which a vehicle can detour or turn around.



W12-X2

**STANDARD:**

In the case of an arch or other structure under which the clearance varies greatly, the W12-X2 Vertical Clearance sign shall be installed on the structure with the appropriate vertical clearance specified. The arrow shall indicate the location of the height specified on the sign.

**GUIDANCE:**

Two or more signs should be used as necessary on the structure itself to give information as to the clearances over the entire roadway. Clearances should be evaluated periodically, particularly when resurfacing operations have occurred.

**OPTION:**

The Low Clearance sign should be installed on and in advance of the structure. If a sign is placed on the structure, it should be a rectangular shape (W12-2a) with the appropriate legend.

**2C.28 BUMP and DIP Signs (W8-1, W8-1a, W8-1b, W8-2)**



W8-1



W8-1a



W8-1b



W8-2

**GUIDANCE:**

BUMP (W8-1) and DIP (W8-2) signs should be used to give warning of a sharp rise or depression in the profile of the road.

**OPTION:**

These signs may be supplemented with an Advisory Speed plaque (see Section 2C.8) or a 45 Degree Supplemental Arrow plaque (W16-7XP).

**STANDARD:**

The DIP sign (W8-2) shall not be used at a short stretch of depressed alignment that might momentarily hide a vehicle.

**GUIDANCE:**

A short stretch of depressed alignment that might momentarily hide a vehicle should be treated as a no-passing zone when center line striping is provided on a two-lane or three-lane road (see Section 3B.2).

**OPTION:**

At severe bumps, a BUMP AHEAD (W8-1a) sign may be placed in advance of the bump location. An appropriate Distance plaque (see Section 2C.55) or Advisory Speed plaque (See Section 2C.8) may be placed below the warning sign.

In areas of multiple bumps, a BUMPS (W8-1b) sign may be placed in advance of the area. An appropriate Distance plaque (see Section 2C.55) may be placed below the warning sign.

**2C.29 SPEED HUMP Sign (W17-1)**



W17-1

**GUIDANCE:**

The SPEED HUMP (W17-1) sign should be used to give warning of a vertical deflection in the roadway that is designed to limit the speed of traffic.

If used, the SPEED HUMP sign should be supplemented by an Advisory Speed plaque (see Section 2C.8).

**OPTION:**

If a series of speed humps exists in close proximity, an Advisory Speed plaque may be eliminated on all but the first SPEED HUMP sign in the series.

The legend SPEED BUMP may be used instead of the legend SPEED HUMP on the W17-1 sign.

**SUPPORT:**

Speed humps generally provide more gradual vertical deflection than speed bumps. Speed bumps limit the speed

of traffic more severely than speed humps. Other forms of speed humps include speed tables and raised intersections. However, these differences in engineering terminology are not well known by the public, so for signing purposes these terms are interchangeable.

**2C.30 PAVEMENT ENDS Sign (W8-3)**



W8-3

**GUIDANCE:**

A PAVEMENT ENDS (W8-3) word message sign should be used where a paved surface changes to either a gravel treated surface or an earth road surface.

**OPTION:**

An Advisory Speed plaque (see Section 2C.8) may be used when the change in roadway condition requires a reduced speed.

**2C.31 Shoulder Signs (W8-4, W8-9, W8-17, W8-23, W8-25, W5-X1)**



W8-4



W8-9



W8-25



W5-X1



W8-17

**OPTION:**

The SOFT SHOULDER (W8-4) sign may be used to warn of a soft shoulder condition.

The LOW SHOULDER (W8-9) sign may be used to warn of a shoulder condition where there is an elevation difference of less than 3 inches between the shoulder and the travel lane.

**GUIDANCE:**

The SHOULDER DROP OFF (W8-17) sign should be used where an unprotected shoulder drop-off, adjacent to the travel lane, exceeds 3 inches in depth for a significant continuous length along the roadway, based on engineering judgment.

**OPTION:**

A SHOULDER DROP-OFF (W8-17P) supplemental plaque may be mounted below the W8-17 sign.

The NO SHOULDER (W8-23) sign may be used to warn road users that a shoulder does not exist along a portion of the roadway.

The SHOULDER ENDS (W8-25) sign may be used to warn road users that a shoulder is ending.

**STANDARD:**

When used, shoulder signs shall be placed in advance of the condition (see Table 2C-4).

**GUIDANCE:**

Additional shoulder signs should be placed at appropriate intervals along the road where the condition continually exists.

**2C.32 Surface Condition Signs (W8-5, W8-7, W8-8, W8-11, W8-13, W8-14)**



**OPTION:**

The Slippery When Wet (W8-5) sign may be used to warn of unexpected slippery conditions. Supplemental plaques with legends such as ICE, WHEN WET, STEEL DECK, or EXCESS OIL may be used with the W8-5 sign to indicate the reason that the slippery conditions might be present.

The LOOSE GRAVEL (W8-7) sign may be used to warn of loose gravel on the roadway surface.

The ROUGH ROAD (W8-8) sign may be used to warn of a rough roadway surface.

An UNEVEN LANES (W8-11) sign may be used to warn of a difference in elevation between travel lanes.


The BRIDGE ICES BEFORE ROAD (W8-13) sign may be used in advance of bridges to advise bridge users of winter weather conditions. The BRIDGE ICES BEFORE ROAD sign may be removed or covered during seasons of the year when its message is not relevant.

The FALLEN ROCKS (W8-14) sign may be used in advance of an area that is adjacent to a hillside, mountain, or cliff where rocks frequently fall onto the roadway.

**GUIDANCE:**

When used, Surface Condition signs should be placed in advance of the beginning of the affected section (see Table 2C-4), and additional signs should be placed at appropriate intervals along the road where the condition exists.

**2C.33 Warning Signs and Plaques for Motorcyclists (W8-15, W8-15P, W8-16)**

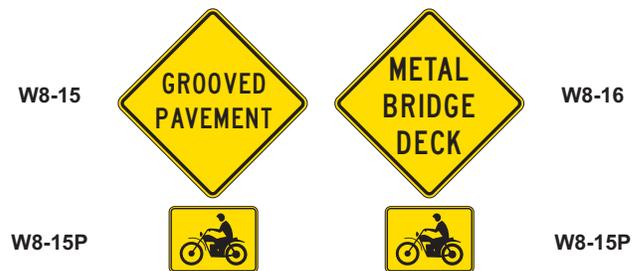

**SUPPORT:**

The signs and plaques described in this Section are intended to give motorcyclists advance notice of surface conditions that might adversely affect their ability to maintain control of their motorcycle under wet or dry

conditions. The use of some of the advance surface condition warning signs described in Section 2C.32, such as Slippery When Wet, LOOSE GRAVEL, or ROUGH ROAD, can also be helpful to motorcyclists if those conditions exist.

**OPTION:**

If a portion of a street or highway features a roadway pavement surface that is grooved or textured instead of smooth, such as a grooved skid resistance treatment for a horizontal curve or a brick pavement surface, a GROOVED PAVEMENT (W8-15) sign may be used to provide advance warning of this condition to motorcyclists, bicyclists, and other road users. Alternate legends such as TEXTURED PAVEMENT or BRICK PAVEMENT may also be used on the W8-15 sign.

If a bridge or a portion of a bridge includes a metal or grated surface, a METAL BRIDGE DECK (W8-16) sign may be used to provide advance warning of this condition to motorcyclists, bicyclists, and other road users.

A Motorcycle (W8-15P) plaque may be mounted below or above a W8-15 or W8-16 sign if the warning is intended to be directed primarily to motorcyclists.

**2C.34 NO CENTER LINE Sign (W8-12)**



W8-12

**OPTION:**

The NO CENTER LINE (W8-12) sign may be used to warn of a roadway without center line pavement markings.

**2C.35 Weather Condition Signs (W8-18, W8-19, W8-21, W8-22)**



W8-18

W8-19



W8-21

W8-22

**OPTION:**

The ROAD MAY FLOOD (W8-18) sign may be used to warn road users that a section of roadway is subject to frequent flooding. A Depth Gauge (W8-19) sign may also be installed within a roadway section that frequently floods.

**STANDARD:**

If used, the Depth Gauge sign shall be in addition to the ROAD MAY FLOOD sign and shall indicate the depth of the water at the deepest point on the roadway.

**OPTION:**

The GUSTY WINDS AREA (W8-21) sign may be used to warn road users that wind gusts frequently occur along a section of highway that are strong enough to impact the stability of trucks, recreational vehicles, and other vehicles with high centers of gravity. A NEXT XX MILES (W7-3a) supplemental plaque may be mounted below the W8-21 sign to inform road users of the length of roadway that frequently experiences strong wind gusts.

The FOG AREA (W8-22) sign may be used to warn road users that foggy conditions frequently reduce visibility along a section of highway. A NEXT XX MILES (W7-3a) supplemental plaque may be mounted below the W8-22 sign to inform road users of the length of roadway that frequently experiences foggy conditions.

## 2C.36 Advance Traffic Control Signs (W3-1, W3-2, W3-3, W3-4, W3-X2, W3-X4)



### STANDARD:

The Advance Traffic Control signs include the Stop Ahead (W3-1), Yield Ahead (W3-2), and Signal Ahead (W3-3) signs. These signs shall be installed on an approach to a primary traffic control device that is not visible for a sufficient distance to permit the road user to respond to the device (see Table 2C-4). The visibility criteria for a traffic control signal shall be based on having a continuous view of at least two signal faces for the distance specified in Table 4D-2.

### SUPPORT:

Figure 2A-4 shows the typical placement of an Advance Traffic Control sign.

Permanent obstructions causing the limited visibility might include roadway alignment or structures. Intermittent obstructions might include foliage or parked vehicles.

### GUIDANCE:

Where intermittent obstructions occur, engineering judgment should determine the treatment to be implemented.

### OPTION:

An Advance Traffic Control sign may be used for additional emphasis of the primary traffic control device, even when the visibility distance to the device is satisfactory.

An advance street name plaque (see Section 2C.58) may be installed above or below an Advance Traffic Control sign.

A warning beacon may be used with an Advance Traffic Control sign.

A BE PREPARED TO STOP (W3-4) sign may be used to warn of stopped traffic caused by a traffic control signal or in advance of a section of roadway that regularly experiences traffic congestion.

### STANDARD:

When a BE PREPARED TO STOP sign is used in advance of a traffic control signal, it shall be used in addition to a Signal Ahead sign and shall be placed downstream from the Signal Ahead (W3-3) sign.

### OPTION:

The BE PREPARED TO STOP sign may be supplemented with a warning beacon (see Section 4L.3).

### STANDARD:

When the warning beacon is interconnected with a traffic control signal or queue detection system, the BE PREPARED TO STOP sign shall be supplemented with a WHEN FLASHING plaque (W16-13P) or use the PREPARE TO STOP WHEN FLASHING sign (W3-X4). See Section 4O.

### SUPPORT:

Section 2C.40 contains information regarding the use of a NO MERGE AREA (W4-5P) supplemental plaque in conjunction with a Yield Ahead sign.

## 2C.37 Advance Ramp Control Signal Signs (W3-7, W3-8)



### OPTION:

A RAMP METER AHEAD (W3-7) sign may be used to warn road users that a freeway entrance ramp is metered and that they will encounter a ramp control signal (see Chapter 4I).

### GUIDANCE:

When the ramp control signals are operated only during certain periods of the day and sight distance is insufficient to react to stopped vehicles, a RAMP METERED WHEN FLASHING (W3-8) sign should be installed in advance of the ramp control signal near the entrance to the ramp, or on the arterial on the approach to the ramp, to alert road users to the presence and operation of ramp meters.

**STANDARD:**

The RAMP METERED WHEN FLASHING sign shall be supplemented with a warning beacon (see Section 4L.3) that flashes when the ramp control signal is in operation.

**2C.38 Reduced Speed Limit Ahead Signs (W3-5, W3-5a)**



W3-5



W3-5a

**GUIDANCE:**

A Reduced Speed Limit Ahead (W3-5 or W3-5a) sign should be used to inform road users of a reduced speed zone where the speed limit is being reduced by more than 10 mph, or where engineering judgment indicates the need for advance notice to comply with the posted speed limit ahead.

**STANDARD:**

If used, Reduced Speed Limit Ahead signs shall be followed by a Speed Limit (R2-1) sign installed at the beginning of the zone where the speed limit applies.

The speed limit displayed on the Reduced Speed Limit Ahead sign shall be identical to the speed limit displayed on the subsequent Speed Limit sign.

**2C.39 DRAW BRIDGE Sign (W3-6)**



W3-6

**STANDARD:**

A DRAW BRIDGE (W3-6) sign shall be used in advance of movable bridge signals and gates (see Section 4J.2) to give warning to road users, except in urban conditions where such signing would not be practical.

**2C.40 Merge Signs (W4-1)**



W4-1

**OPTION:**

A Merge (W4-1) sign may be used to warn road users on the major roadway that merging movements might be encountered in advance of a point where lanes from two separate roadways converge as a single traffic lane and no turning conflict occurs.

A Merge sign may also be installed on the side of the entering roadway to warn road users on the entering roadway of the merge condition.

**GUIDANCE:**

The Merge sign should be installed on the side of the major roadway where merging traffic will be encountered and in such a position as to not obstruct the road user's view of entering traffic.

Where two roadways of approximately equal importance converge, a Merge sign should be placed on each roadway.

When a Merge sign is to be installed on an entering roadway that curves before merging with the major roadway, such as a ramp with a curving horizontal alignment as it approaches the major roadway, the Entering Roadway Merge (W4-5) sign should be used to better portray the actual geometric conditions to road users on the entering roadway.

The Merge sign should not be used where two roadways converge and merging movements are not required.

The Merge sign should not be used in place of a Lane Ends sign (see Section 2C.42) where lanes of traffic moving on a single roadway must merge because of a reduction in the actual or usable pavement width.

**OPTION:**

For a yield-controlled channelized right-turn movement onto a roadway without an acceleration lane, a NO MERGE AREA (W4-5P) supplemental plaque may be mounted below a Yield Ahead (W3-2) sign and/or below a YIELD (R1-2) sign when engineering judgment indicates that road users would expect an acceleration lane to be present. (see Section 2B.9 for YIELD sign applications)

MN Rev. 1

## 2C.41 Added Lane Sign (W4-3, W4-6)



W4-3



W4-6

### GUIDANCE:

The Added Lane (W4-3) sign should be installed in advance of a point where two roadways converge and merging movements are not required. When possible, the Added Lane sign should be placed such that it is visible from both roadways; if this is not possible, an Added Lane sign should be placed on the side of each roadway.

When an Added Lane sign is to be installed on a roadway that curves before converging with another roadway that has a tangent alignment at the point of convergence, the Entering Roadway Added Lane (W4-6) sign should be used to better portray the actual geometric conditions to road users on the curving roadway.

## 2C.42 Lane Ends Signs

(W4-2, W9-1, W9-2)



W4-2



W9-1



W9-2

### GUIDANCE:

The LANE ENDS MERGE RIGHT (LEFT) (W9-2) sign or the Lane Ends (W4-2) sign should be used to warn of the reduction in the number of traffic lanes in the direction of travel on a multi-lane highway.

### OPTION:

The RIGHT (LEFT) LANE ENDS (W9-1) sign may be used in advance of the Lane Ends (W4-2) sign or the LANE ENDS MERGE LEFT (RIGHT) (W9-2) sign as additional warning or to emphasize that the traffic lane is ending and that a merging maneuver will be required.

### GUIDANCE:

If used, the RIGHT (LEFT) LANE ENDS (W9-1) sign should be installed adjacent to the Lane-Reduction Arrow pavement markings.

### OPTION:

On one-way streets or on divided highways where the width of the median will permit, two Lane Ends signs may be placed facing approaching traffic, one on the right-hand side and the other on the left-hand side or median.

### SUPPORT:

Section 3B.9 contains information regarding the use of pavement markings in conjunction with a lane reduction.

### GUIDANCE:

Where an extra lane has been provided for slower moving traffic (see Section 2B.31), a Lane Ends word sign or a Lane Ends (W4-2) symbol sign should be installed in advance of the downstream end of the extra lane.

Lane Ends signs should not be installed in advance of the downstream end of an acceleration lane.

### STANDARD:

In dropped lane situations, regulatory signs (see Section 2B.20) shall be used to inform road users that a through lane is becoming a mandatory turn lane. The W4-2, W9-1, and W9-2 signs shall not be used in dropped lane situations.

## 2C.43 RIGHT (LEFT) LANE EXIT ONLY AHEAD Sign (W9-7)



W9-7

### OPTION:

The RIGHT (LEFT) LANE EXIT ONLY AHEAD (W9-7) sign may be used to provide advance warning to road users that traffic in the right-hand (left-hand) lane of a roadway that is approaching a grade-separated interchange will be required to depart the roadway on an exit ramp at the next interchange.

### STANDARD:

The W9-7 sign shall be a horizontal rectangle with a black legend and border on a yellow background.

**GUIDANCE:**

If used, the W9-7 sign should be installed upstream from the first overhead guide sign that contains an EXIT ONLY sign panel or upstream from the first RIGHT (LEFT) LANE MUST EXIT (R3-33) regulatory sign, whichever is farther upstream from the exit.

**SUPPORT:**

Section 2B.23 contains information regarding a regulatory sign that can also be used for lane drops at grade-separated interchanges.

**2C.44 Two-Way Traffic Sign (W6-3)**



MN Rev. 3

**GUIDANCE:**

A Two-Way Traffic (W6-3) sign should be used to warn road users of a transition from a multi-lane divided section of roadway to a two-lane, two-way section of roadway.

A Two-Way Traffic (W6-3) sign with an AHEAD (W16-9p) plaque should be used to warn road users of a transition from a one-way street to a two-lane, two-way section of roadway (see Figure 2B-14).

**OPTION:**

The Two-Way Traffic sign may be used at intervals along a two-lane, two-way roadway.

MN Rev. 2

MN Rev. 1

**2C.45 NO PASSING ZONE Sign (W14-3)**



W14-3

**STANDARD:**

The NO PASSING ZONE (W14-3) sign shall be a pennant-shaped isosceles triangle with its longer axis horizontal and pointing to the right. When used, the NO PASSING ZONE sign shall be installed on the left side of the roadway at the beginning of no-passing zones identified by pavement markings or DO NOT PASS signs or both (see Sections 2B.29 and 3B.2).

MN Rev. 1

**2C.46 Intersection Warning Signs (W2-1 through W2-8)**



W2-1



W2-2



W2-3



W2-4



W2-5



W2-7L



W2-7R



W2-8

**OPTION:**

A Cross Road (W2-1) symbol, Side Road (W2-2 or W2-3) symbol, T-Intersection symbol (W2-4), or Y-Intersection symbol (W2-5) sign may be used in advance of an intersection to indicate the presence of an intersection and the possibility of turning or entering traffic.

The Circular Intersection (W2-6) symbol sign may be installed in advance of a circular intersection (see Figures 2B-21 through 2B-23).

**GUIDANCE:**

If an approach to a roundabout has a statutory or posted speed limit of 40 mph or higher, the Circular Intersection (W2-6) symbol sign should be installed in advance of the circular intersection.



W2-6



W16-12P



W16-17P

**OPTION:**

A ROUNDABOUT (W16-17P) educational plaque may be mounted above or below a circular intersection symbol sign on the approach to a roundabout but may not be used on an approach to a traffic circle.

A TRAFFIC CIRCLE (W16-12P) educational plaque may be mounted above or below a circular intersection symbol sign on the approach to a traffic circle but may not be used on an approach to a roundabout.

The relative importance of the intersecting roadways may be shown by different widths of lines in the symbol.

An advance street name plaque (see Section 2C.58) may be installed above or below an Intersection Warning sign.

**GUIDANCE:**

The Intersection Warning sign should illustrate and depict the general configuration of the intersecting roadway, such as cross road, side road, T-intersection, or Y-intersection.

Intersection Warning signs, other than the Circular Intersection (W2-6) symbol sign and the T-Intersection (W2-4) symbol sign should not be used on approaches controlled by STOP signs, YIELD signs, or signals.

If an Intersection Warning sign is used where the side roads are not opposite of each other, Offset Side Roads (W2-7) symbol sign should be used instead of the Cross Road symbol sign.

If an Intersection Warning sign is used where two closely-spaced side roads are on the same side of the highway, the Double Side Roads (W2-8) symbol sign should be used instead of the Side Road symbol sign.

No more than two side road symbols should be displayed on the same side of the highway on a W2-7 or W2-8 symbol sign, and no more than three side road symbols should be displayed on a W2-7 or W2-8 symbol sign.

### 2C.47 Two-Direction Large Arrow Sign (W1-7)



W1-7

**STANDARD:**

The Two-Direction Large Arrow (W1-7) sign shall be a horizontal rectangle.

If used, it shall be installed on the far side of a T-intersection in line with, and at approximately a right angle to, traffic approaching from the stem of the T-intersection.

The Two-Direction Large Arrow sign shall not be used where there is no change in the direction of travel such as at the beginnings and ends of medians or at center piers.

The Two-Direction Large Arrow sign directing traffic to the left and right shall not be used in the central island of a roundabout.

**GUIDANCE:**

The Two-Direction Large Arrow sign should be visible for a sufficient distance to provide the road user with adequate time to react to the intersection configuration.

MIN Rev. 1

**2C.48 Traffic Signal Signs (W25-1, W25-2)**



W25-1



W25-2

**STANDARD:**

At locations where either a W25-1 or a W25-2 sign is required based on the provisions in Section 4D.05, the W25-1 or W25-2 sign shall be installed near the left-most signal head. The W25-1 and W25-2 signs shall be vertical rectangles.

**2C.49 Vehicular Traffic Signs (W8-6, W11-1, W11-5, W11-5a, W11-6, W11-8, W11-10, W11-11, W11-12p, W11-14, W11-15, W11-15a, W11-15P, W11-X3,)**



W8-6



W11-1



W11-1



W11-5



W11-5a



W11-6



W11-10



W11-11



W11-14



W11-8



W11-15



W11-15



W11-15a



W11-15a



W11-X3



W11-15P



W11-15P



W11-12P



W16-13P

**OPTION:**

Vehicular Traffic Warning (W8-6, W11-1, W11-5, W11-5a, W11-6, W11-8, W11-11, W11-12P, W11-14, W11-15, and W11-15a, W11-X3) signs may be used to alert road users to locations where unexpected entries into the roadway by trucks, bicyclists, farm vehicles, snowmobiles, emergency vehicles, golf carts, horse-drawn vehicles, or other vehicles might occur.

**SUPPORT:**

These locations might be relatively confined or might occur randomly over a segment of roadway.

**GUIDANCE:**

Vehicular Traffic Warning signs should be used only at locations where the road user's sight distance is restricted, or the condition, activity, or entering traffic would be unexpected.

If the condition or activity is seasonal or temporary, the Vehicular Traffic Warning signs should be removed or covered when the condition or activity does not exist.

**OPTION:**

The combined Bicycle/Pedestrian (W11-15) sign may be used where both bicyclists and pedestrians might be crossing the roadway, such as at an intersection with a shared-use path. A TRAIL X-ING (W11-15P) supplemental plaque may be mounted below the W11-15 sign. The TRAIL CROSSING (W11-15a) sign may be used to warn of shared-use path crossings where pedestrians, bicyclists, and other user groups might be crossing the roadway.

The W11-1, W11-15, and W11-15a signs and their related supplemental plaques may have a fluorescent yellow-green background with a black legend and border.

Supplemental plaques (see Section 2C.53) with legends such as AHEAD, XX FEET, NEXT XX MILES, or SHARE THE ROAD may be mounted below Vehicular Traffic Warning signs to provide advance notice to road users of unexpected entries.

**GUIDANCE:**

If used in advance of a pedestrian and bicycle crossing, a W11-15 or W11-15a sign should be supplemented with an AHEAD or XX FEET plaque to inform road users that they are approaching a point where crossing activity might occur.

**STANDARD:**

If a post-mounted W11-1, W11-6, W11-11, W11-15, or W11-15a sign is placed at the location of the crossing point where golf carts, pedestrians, bicyclists, or other shared-use path users might be crossing the roadway, a diagonal downward pointing arrow (W16-7P) plaque shall be mounted below the sign. If the W11-1, W11-6, W11-11, W11-15, or W11-15a sign is mounted overhead, the W16-7P supplemental plaque shall not be used.

**OPTION:**

The crossing location identified by a W11-1, W11-6, W11-11, W11-15, or W11-15a sign may be defined with crosswalk markings (see Section 3B.18).

**STANDARD:**

The Emergency Vehicle (W11-8) sign with the EMERGENCY SIGNAL AHEAD (W11-12P) supplemental plaque shall be placed in advance of all emergency-vehicle traffic control signals (see Chapter 4F).

**OPTION:**

The Emergency Vehicle (W11-8) sign, or a word message sign indicating the type of emergency vehicle (such as rescue squad), may be used in advance of the emergency vehicle station when no emergency-vehicle traffic control signal is present.

A Warning Beacon (see Section 4L.3) may be used with any Vehicular Traffic Warning sign to indicate specific periods when the condition or activity is present or is likely to be present, or to provide enhanced sign conspicuity.

A supplemental WHEN FLASHING (W16-13P) plaque may be used with any Vehicular Traffic Warning sign that is supplemented with a Warning Beacon to indicate specific periods when the condition or activity is present or is likely to be present.

**2C.50 Non-Vehicular Signs  
(W11-2, W11-3, W11-4, W11-7,  
W11-9, W11-16 through W11-22)**



W11-2



W11-2



W11-3



W11-4



W11-7



W11-9



W11-9



W11-16



W11-17



W11-18



W11-19



W11-20



W11-21



W11-22

**OPTION:**

Non-Vehicular Warning (W11-2, W11-3, W11-4, W11-7, W11-9, and W11-16 through W11-22) signs may be used to alert road users in advance of locations where unexpected entries into the roadway might occur or where shared use of the roadway by pedestrians, animals, or equestrians might occur.

**SUPPORT:**

These conflicts might be relatively confined, or might occur randomly over a segment of roadway.

**GUIDANCE:**

If used in advance of a pedestrian, snowmobile, or equestrian crossing, the W11-2, W11-7, and W11-9 signs should be supplemented with plaques (see Section 2C.55) with the legend AHEAD or XX FEET to inform road users that they are approaching a point where crossing activity might occur.



**STANDARD:**

If a post-mounted W11-2, W11-6, W11-7, or W11-9 sign is placed at the location of the crossing point where pedestrians, snowmobilers, or equestrians might be crossing the roadway, a diagonal downward pointing arrow (W16-7P) plaque shall be mounted below the sign. If the W11-2, W11-7, or W11-9 sign is mounted overhead, the W16-7P plaque shall not be used.

**OPTION:**

A Pedestrian Crossing (W11-2) sign may be placed overhead or may be post-mounted with a diagonal downward pointing arrow (W16-7P) plaque at the crosswalk location where Yield Here To (Stop Here For) Pedestrians signs (see Section 2B.11) have been installed in advance of the crosswalk.

**STANDARD:**

If a W11-2 sign has been post-mounted at the crosswalk location where a Yield Here To (Stop Here For) Pedestrians sign is used on the approach, the Yield Here To (Stop Here For) Pedestrians sign shall not be placed on the same post as or block the road user's view of the W11-2 sign.

**OPTION:**

An advance Pedestrian Crossing (W11-2) sign with an AHEAD or a distance supplemental plaque may be used in conjunction with a Yield Here To (Stop Here For) Pedestrians sign on the approach to the same crosswalk.

The crossing location identified by a W11-2, W11-7, or W11-9 sign may be defined with crosswalk markings (see Section 3B.18).

The W11-2 and W11-9 signs and their related supplemental plaques may have a fluorescent yellow-green background with a black legend and border.

Pedestrian and School Crossing signs and their related supplemental plaques may have a fluorescent yellow-green background with a black legend and border.

**GUIDANCE:**

When a fluorescent yellow-green background is used, a systematic approach featuring one background color within a zone or area should be used. The mixing of standard yellow and fluorescent yellow-green backgrounds within a selected site area should be avoided.

Non-vehicular signs should be used only at locations where the crossing activity is unexpected or at locations not readily apparent.

Additional information on crossings can be found in the following sections:

- Section 7B School Crossing sign
- Section 9B Bicycle Crossing sign

**OPTION:**

A Warning Beacon (see Section 4L.3) may be used with any Non-Vehicular Warning sign to indicate specific periods when the condition or activity is present or is likely to be present, or to provide enhanced sign conspicuity.

A supplemental WHEN FLASHING (W16-13P) plaque may be used with any Non-Vehicular Warning sign that is supplemented with a Warning Beacon to indicate specific periods when the condition or activity is present or is likely to be present.

MN Rev. 1

## 2C.51 Playground Sign (W15-1)



### OPTION:

The Playground (W15-1) sign may be used to give advance warning of a designated children's playground that is located adjacent to the road.

The Playground sign may have a fluorescent yellow-green background with a black legend and border.

### GUIDANCE:

If the access to the playground area requires a roadway crossing, the application of crosswalk pavement markings (see Section 3B.18) and Non-Vehicular Warning signs (see Section 2C.50) should be considered.

## 2C.52 NEW TRAFFIC PATTERN AHEAD Sign (W23-2)



### OPTION:

A NEW TRAFFIC PATTERN AHEAD (W23-2) sign may be used on the approach to an intersection or along a section of roadway to provide advance warning of a change in traffic patterns, such as revised lane usage, roadway geometry, or signal phasing.

### GUIDANCE:

The NEW TRAFFIC PATTERN AHEAD sign should be removed when the traffic pattern returns to normal, when the changed pattern is no longer considered to be new, or within six months.

## 2C.53 Use of Supplemental Warning Plaques

### OPTION:

A supplemental warning plaque may be displayed with a warning or regulatory sign when engineering judgment indicates that road users require additional warning information beyond that contained in the main message of the warning or regulatory sign.

### STANDARD:

Supplemental warning plaques shall be used only in combination with warning or regulatory signs. They shall not be mounted alone or displayed alone. If used, a supplemental warning plaque shall be installed on the same post(s) as the warning or regulatory sign that it supplements.

Unless otherwise provided in this Manual for a particular plaque, supplemental warning plaques shall be mounted below the sign they supplement.


## 2C.54 Design of Supplemental Warning Plaques

### STANDARD:

A supplemental warning plaque used with a warning sign shall have the same legend, border, and background color as the warning sign with which it is displayed. A supplemental warning plaque used with a regulatory sign shall have a black legend and border on a yellow background.

Supplemental warning plaques shall be square or rectangular.

**2C.55 Distance Plaques**  
(W16-2 series, W16-3 series,  
W16-4P, W7-3aP)

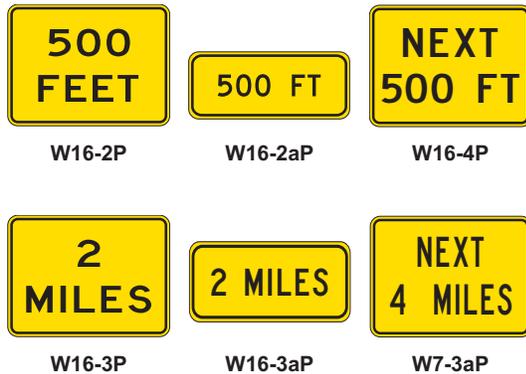


**OPTION:**

The Distance Ahead (W16-2 series and W16-3 series) plaques may be used to inform the road user of the distance to the condition indicated by the warning sign.

The Next Distance (W7-3aP and W16-4P) plaques may be used to inform road users of the length of roadway over which the condition indicated by the warning sign exists.

**2C.56 Supplemental Arrow Plaques**  
(W16-5P, W16-6P)

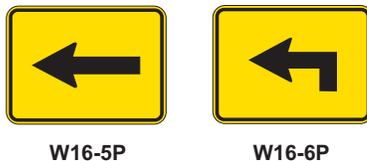


**GUIDANCE:**

If the condition indicated by a warning sign is located on an intersecting road and the distance between the intersection and condition is not sufficient to provide adequate advance placement of the warning sign, a Supplemental Arrow (W16-5P or W16-6P) plaque should be used below the warning sign.

**STANDARD:**

Supplemental Arrow plaques shall have the same legend design as the Advance Turn Arrow and Directional Arrow auxiliary signs (see Sections 2D.26 and 2D.28) except that they shall have a black legend and border on a yellow or fluorescent yellow-green background, as appropriate.

**2C.57 Hill-Related Plaques**  
(W7-2 Series and W7-3 Series)

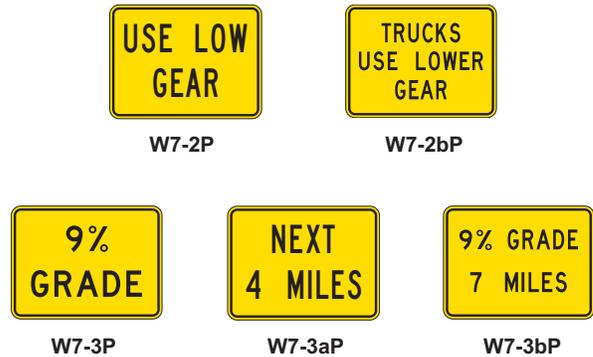

**GUIDANCE:**

Hill-Related (W7-2 series, W7-3 series) plaques or other appropriate legends and larger signs should be used for emphasis or where special hill characteristics exist.

On longer grades, the use of the distance plaque (W7-3aP or W7-3bP) at periodic intervals of approximately 1-mile spacing should be considered.

**2C.58 Advance Street Name Plaque**  
(W16-8P, W16-8aP)



**OPTION:**

An Advance Street Name (W16-8P or W16-8aP) plaque may be used with any Intersection sign (W2 series, W10-2, W10-3, or W10-4) or Advance Traffic Control (W3 series) sign to identify the name of the intersecting street. Advance Street Name plaques may be mounted above or below the sign.

**STANDARD:**

The lettering on Advance Street Name plaques shall be composed of a combination of lower-case letters with initial upper-case letters.

MN Rev. 2

If two street names are used on the Advance Street Name plaque, a directional arrow pointing in the direction of the street shall be placed next to each street name. Arrows pointing to the left shall be placed to the left of the street name, and arrows pointing to the right shall be placed to the right of the street name.

**GUIDANCE:**

If two street names are used on the Advance Street Name plaque, the street names and associated arrows should be displayed in the following order:

- A. For a single intersection, the name of the street to the left should be displayed above the name of the street to the right; or
- B. For two sequential intersections, such as where the plaque is used with an Offset Side Roads (W2-7) or a Double Side Road (W2-8) symbol sign, the name of the first street encountered should be displayed above the name of the second street encountered, and the arrow associated with the second street encountered should be an advance arrow, such as the arrow shown on the W16-6P arrow plaque.

**2C.59 CROSS TRAFFIC DOES NOT STOP Plaque (W4-4P Series)**



W4-4P



W4-4aP



W4-4bP

**OPTION:**

The CROSS TRAFFIC DOES NOT STOP (W4-4P) plaque may be used in combination with a STOP sign when engineering judgment indicates that conditions are present that are causing or could cause drivers to misinterpret the intersection as an all-way stop.

Alternate messages such as TRAFFIC FROM LEFT (RIGHT) DOES NOT STOP (W4-4aP) or ONCOMING TRAFFIC DOES NOT STOP (W4-4bP) may be used when such messages more accurately describe the traffic controls established at the intersection.

**GUIDANCE:**

Plaques with the appropriate alternative messages of TRAFFIC FROM LEFT (RIGHT) DOES NOT STOP or ONCOMING TRAFFIC DOES NOT STOP should be used at intersections where STOP signs control all but one approach to the intersection, unless the only non-stopped approach is from a one-way street.

**STANDARD:**

If a W4-4P plaque or a plaque with an alternative message is used, it shall be mounted below the STOP sign.

**OPTION:**

A double-headed arrow may be included within the plaque (W4-4P) except at one-way crossings.

**STANDARD:**

A single headed arrow shall not be used.

**2C.60 SHARE THE ROAD Plaque (W16-1P)**



W16-1P

**OPTION:**

In situations where there is a need to warn drivers to watch for other slower forms of transportation traveling along the highway, such as bicycles, golf carts, horse-drawn vehicles, or farm machinery, a SHARE THE ROAD (W16-1P) plaque may be used.

**STANDARD:**

A W16-1P plaque shall not be used alone. If a W16-1P plaque is used, it shall be mounted below either a Vehicular Traffic Warning sign (see Section 2C.49) or a Non-Vehicular Warning sign (see Section 2C.50). The background color of the W16-1P plaque shall match the background color of the warning sign with which it is displayed.

## 2C.61 PHOTO ENFORCED Plaque (W16-10P, W16-10aP)



### OPTION:

A Photo Enforced (W16-10P) plaque or a PHOTO ENFORCED (W16-10aP) word message plaque may be mounted below a warning sign to advise road users that the regulations associated with the condition being warned about (such as a traffic control signal or a toll plaza) are being enforced by photographic equipment.

### STANDARD:

If used below a warning sign, the Photo Enforced (W16-10P or W16-10aP) plaque shall be a rectangle with a black legend and border on a yellow background.

## 2C.62 NEW Plaque (W16-15P)



W16-15P

### OPTION:

A NEW (W16-15P) plaque may be mounted above a regulatory sign when a new regulation takes effect in order to alert road users to the new traffic regulation. A NEW plaque may also be mounted above an advance warning sign (such as a Signal Ahead sign for a newly-installed traffic control signal) for a new traffic regulation.

### STANDARD:

The NEW plaque shall not be used alone.

The NEW plaque shall be removed no later than 6 months after the regulation has been in effect.

## 2C.63 Object Marker Design and Placement Height

### SUPPORT:

Type 1, 2, and 3 object markers are used to mark obstructions within or adjacent to the roadway. Type 4 object markers are used to mark the end of a roadway.

### STANDARD:

When used, object markers shall not have a border and shall consist of an arrangement of one or more of the following types:

Type 1-a diamond-shaped sign, at least 18 inches on a side, consisting of either a yellow (OM1-1) or black (OM1-2) sign with nine yellow retroreflective devices, each with a minimum diameter of 3 inches, mounted symmetrically on the sign, or an all-yellow retroreflective sign (OM1-3).

Type 2-either a marker (OM2-1V or OM2-1H) consisting of three yellow retroreflective devices, each with a minimum diameter of 3 inches, arranged either horizontally or vertically on a white sign measuring at least 6 x 12 inches; or an all-yellow horizontal or vertical retroreflective sign (OM2-2V or OM2-2H), measuring at least 6 x 12 inches.

Type 3-a striped marker, 12 x 36 inches, consisting of a vertical rectangle with alternating black and retroreflective yellow stripes sloping downward at an angle of 45 degrees toward the side of the obstruction on which traffic is to pass. The minimum width of the yellow and black stripes shall be 3 inches.


Type 4-a diamond-shaped sign, at least 18 inches on a side, consisting of either a red (OM4-1) or black (OM4-2) sign with nine red retroreflective devices, each with a minimum diameter of 3 inches, mounted symmetrically on the sign, or an all-red retroreflective sign (OM4-3).

### SUPPORT:

A better appearance can be achieved if the black stripes are wider than the yellow stripes.

Type 3 object markers with stripes that begin at the upper right side and slope downward to the lower left side are designated as right object markers (OM3-R). Object markers with stripes that begin at the upper left side and slope downward to the lower right side are designated as left object markers (OM3-L).

**Type 1 Object Markers  
(obstructions within the roadway)**

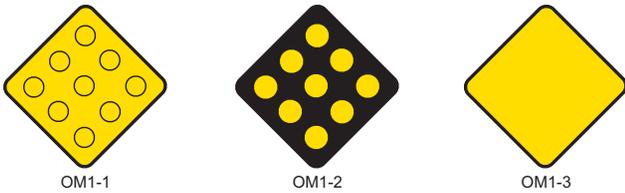

OM1-1

OM1-2

OM1-3

**Type 2 Object Markers  
(obstructions adjacent to the roadway)**




OM2-1V

OM2-2V

OM2-1H

OM2-2H

**Type 3 Object Markers  
(obstructions adjacent to or within the roadway)**

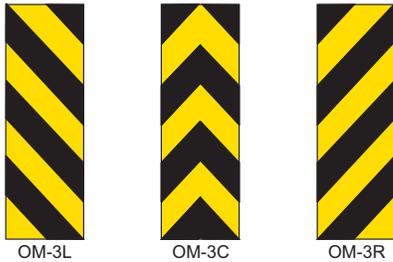


OM3-L

OM3-C

OM3-R

**Type 4 Object Markers  
(end of roadway)**

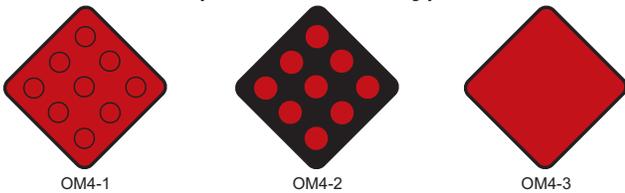

OM4-1

OM4-2

OM4-3

**Figure 2C-13 Object Markers**

**GUIDANCE:**

When used for marking obstructions within the roadway or obstructions that are 8 feet or less from the shoulder or curb, the minimum mounting height, measured from the bottom of the object marker to the elevation of the near edge of the traveled way, should be 4 feet. When used to mark obstructions more than 8 feet from the shoulder or curb, the clearance from the ground to the bottom of the object marker should be at least 4 feet.

Object markers should not present a vertical or horizontal clearance obstacle for pedestrians.

**OPTION:**

When object markers or markings are applied to an obstruction that by its nature requires a lower or higher mounting, the vertical mounting height may vary according to need.

**SUPPORT:**

Section 9B.26 contains information regarding the use of object markers on shared-use paths.

**2C.64 Object Markers for Obstructions Within the Roadway**

**STANDARD:**

Obstructions within the roadway shall be marked with a Type 1 or Type 3 object marker. In addition to markers on the face of the obstruction, warning of approach to the obstruction shall be given by appropriate pavement markings (see Section 3B.10).

**OPTION:**

Object markers may be installed alone or in combination with signs (such as KEEP RIGHT, KEEP LEFT, double arrows, or guide signs) located within the island.

To provide additional emphasis, a Type 1 or Type 3 object marker may be installed at or near the approach end of a median island.

To provide additional emphasis, large surfaces such as bridge piers may be painted with diagonal stripes, 12 inches or greater in width, similar in design to the Type 3 object marker.

**STANDARD:**

The alternating black and retroreflective yellow stripes (OM3-L, OM3-R) shall be sloped down at an angle of 45 degrees toward the side on which traffic is to pass the obstruction. If traffic can pass to either side of the obstruction, the alternating black and retroreflective yellow stripes (OM3-C) shall form chevrons that point upwards.

**OPTION:**

Appropriate signs (see Sections 2B.32 and 2C.25) directing traffic to one or both sides of the obstruction may be used instead of the object marker.

## 2C.65 Object Markers for Obstructions Adjacent to the Roadway

### SUPPORT:

Obstructions not actually within the roadway are sometimes so close to the edge of the road that they need a marker. These include underpass piers, bridge abutments, handrails, ends of traffic barriers, utility poles, and culvert headwalls. In other cases there might not be a physical object involved, but other roadside conditions exist, such as narrow shoulders, drop-offs, gores, small islands, and abrupt changes in the roadway alignment, that might make it undesirable for a road user to leave the roadway, and therefore would create a need for a marker.

### STANDARD:

If a Type 2 or Type 3 object marker is used to mark an obstruction adjacent to the roadway, the edge of the object marker that is closest to the road user shall be installed in line with the closest edge of the obstruction.

Where Type 3 object markers are applied to the approach ends of guardrail and other roadside appurtenances, sheeting without a substrate shall be directly affixed to the approach end of the guardrail in a rectangular shape conforming to the size of the approach end of the guardrail with alternating black and retroreflective yellow stripes sloping downward at an angle of 45 degrees toward the side of the obstruction on which traffic is to pass.

Type 1 and Type 4 object markers shall not be used to mark obstructions adjacent to the roadway.

### GUIDANCE:

Standard warning signs in this Chapter should also be used where applicable.

## 2C.66 Object Markers for Ends of Roadways

### SUPPORT:

The Type 4 object marker is used to warn and alert road users of the end of a roadway in other than construction or maintenance areas.

### STANDARD:

If an object marker is used to mark the end of a roadway, a Type 4 object marker shall be used.

### OPTION:

The Type 4 object marker may be used in instances where there are no alternate vehicular paths.

Where conditions warrant, more than one marker, or a larger marker with or without a Type 3 Barricade (see Section 2B.67), may be used at the end of the roadway.

### STANDARD:

The minimum mounting height, measured vertically from the bottom of a Type 4 object marker to the elevation of the near edge of the traveled way, shall be 4 feet.

### GUIDANCE:

Appropriate advance warning signs in this Chapter should be used.